

Universal 8-in-1 Multifrequency 300-915MHZ Garage Remote Control Duplicator

Multi Brand Compatible Garage Door & Gate Remote

Super Multi-frequency Copy [One Control Eight] Red



An 8-channel remote controller can control eight doors



One channel copies one door, and the individually control does not interfere with each other



With channel locking function

Press the two buttons of the remote controller for a long time. After about 3 seconds, the LED light flashes quickly, which means that the channel is locked successfully. (Subsequent switching channels cannot be switched. If you need to switch, press the above operation to operate again.)

The remote control is rechargeable it charging with TYPE-C Port



When charging, the red light will light up, and then it will go out when it is full



Description

8-channel multi-frequency copy remote controller

1. Can copy most common fixed codes such as 2262, learning codes such as 1527 and rolling codes such as HC301, and some non-standard encrypted remote controls.
2. More than 16 kinds of frequencies are supported, and the frequencies of 300-915Mhz can be copied.
3. One remote controller can copy 8 groups of remote controllers, and can store 8 data in total.
4. High-quality chip with storage function can be recovered even if the code is not carefully cleared, and data will not be lost when the battery is replaced.

Receiving frequency: 300~915MHZ

Transmit power: 13dBm

Operating voltage: 3.7V

Operating current: 30MA

Remote control distance: 30-50m

Charging interface: 5V type-C

Operations:

1. Clear code first

Choose the channel by "+" "-"

" buttons, press the 2 buttons of the upper row at the same time and wait 2 seconds.

The light should flash quickly and constantly.

2. Copy the other remote

Choose the channel by "+" "-" buttons, put the original remote and the 8-in-

1 remote together. Press the key of original remote and the key of 8-in-

1 remote at the same time for 3 seconds. The Led of channel number will light up, then release.

Copy the other keys by the same way.

Change the channel if you copy other remote.

3. Recovery the last codes

If you forget the code for duplicator, press the 2 keys of the middle row at the same time for 2 seconds. The Led will flash, then release the keys.


4. Lock Channels

Choose the channel, press the second button of the upper row and the first button of the middle row at the same time. The Led will blink rapidly, indicating t



The method used

Clearing

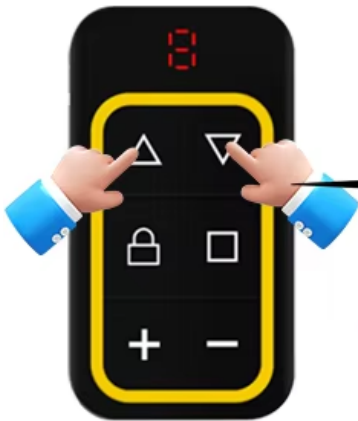


Copying



Recovery



Lock Channel

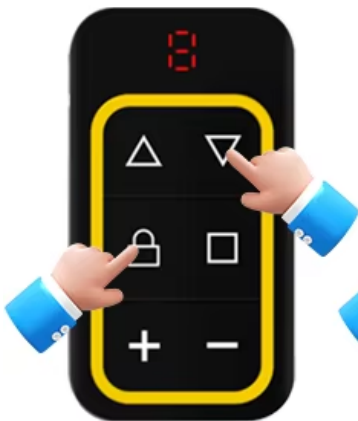

Cancel locking



Next Channel



Last Channel

