

A_S-1W & B_LS-1W Series

1W, FIXED INPUT, ISOLATED & UNREGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER

FEATURES

- High efficiency up to 80%
- 1KVDC isolation
- SIP package
- Internal SMD construction
- Temperature range: -40°C ~ +85°C
- No heat sink required
- No external component required
- Industry standard pinout
- RoHS Compliance

APPLICATIONS

The A_S-1W & B_LS-1W series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

MODEL SELECTION

A0505S-1W



PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% , Typ.)	Certificate
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max.	Min.		
B0303LS-1W	3.3	3.0-3.6	3.3	303	31	72	
B0305LS-1W			5	200	20	74	
A0505S-1W	5	4.5-5.5	± 5	± 100	± 10	72	UL
A0509S-1W			± 9	± 56	± 6	77	UL
A0512S-1W			± 12	± 42	± 5	79	UL
A0515S-1W			± 15	± 33	± 4	80	UL
A0524S-1W			± 24	± 21	± 3	82	
B0503LS-1W			3.3	303	31	72	
B0505LS-W5			5	100	10	68	
B0505LS-1W			5	200	20	70	UL CE
B0509LS-1W			9	111	12	78	UL CE
B0512LS-1W			12	83	9	78	UL CE
B0515LS-1W	15	67	7	80	UL CE		
B0524LS-1W	24	42	4	81			
A1205S-1W	12	10.8-13.2	± 5	± 100	± 10	72	UL
A1209S-1W			± 9	± 56	± 6	78	UL
A1212S-1W			± 12	± 42	± 5	79	UL
A1215S-1W			± 15	± 33	± 4	78	UL
B1203LS-1W			3.3	303	31	74	
B1205LS-1W			5	200	20	71	UL CE
B1209LS-1W			9	111	12	76	UL CE
B1212LS-1W			12	83	9	78	UL CE
B1215LS-1W			15	67	7	79	UL CE
B1224LS-1W			24	42	4	84	
A1505S-1W	15	13.5-16.5	± 5	± 100	± 10	72	
A1512S-1W			± 12	± 42	± 5	76	
A1515S-1W			± 15	± 33	± 4	79	
B1505LS-1W			5	200	20	72	
B1512LS-1W			12	83	9	76	
B1515LS-1W			15	67	7	75	
A2405S-1W	24	21.6-26.4	± 5	± 100	± 10	73	UL
A2409S-1W			± 9	± 56	± 6	79	UL
A2412S-1W			± 12	± 42	± 5	80	UL
A2415S-1W			± 15	± 33	± 4	80	UL
A2424S-1W			± 24	± 21	± 3	81	
B2405LS-1W			5	200	20	73	UL CE
B2409LS-1W			9	111	12	78	UL CE
B2412LS-1W			12	83	9	78	UL CE
B2415LS-1W			15	67	7	79	UL CE
B2415LS-1W			24	42	4	78	

Note: The A_S-W2/B_LS-W2 series also are available in our company.

MORNSUN Science & Technology Co.,Ltd.

Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

<http://www.mornsun-power.com>

ISOLATION SPECIFICATIONS					
Item	Test conditions	Min.	Typ.	Max.	Units
Isolation voltage	Tested for 1 minute and 1 mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

COMMON SPECIFICATIONS					
Item	Test conditions	Min.	Typ.	Max.	Units
Storage humidity range				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15	25	
Lead temperature	1.5mm from case for 10 seconds			300	
Short circuit protection*				1	S
Cooling		Free air convection			
Case material		Plastic (UL94-V0)			
MTBF		3500			K hours
Weight			2.1		g

*Supply voltage must be discontinued at the end of short circuit duration.

OUTPUT SPECIFICATIONS					
Item	Test conditions	Min.	Typ.	Max.	Units
Output power		0.1		1	W
Line regulation	For Vin change of 1%			±1.2	%
Load regulation	10% to 100% load	(3.3 output)	12	20	
		(5V output)	10.5	15	
		(9V output)	8.3	15	
		(12V output)	6.8	15	
		(15V output)	6.3	15	
	(24V output)	5	15		
Output voltage accuracy		See tolerance envelope graph			
Temperature drift	100% full load			0.03	%/°C
Ripple & Noise	20MHz Bandwidth	(AXXXS-1W)	50	75	mVp-p
		(BXXXLS-1W)	75	100	
		(AXX24LS-1W)	100	150	
		(BXX24LS-1W)	100	150	
Switching frequency	Full load, nominal input		100		KHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.
Note: Dual output models unbalanced load: ±5%.

APPLICATION NOTE

1) Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load **could not be less than 10% of the full load**. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (A_S -W2/B_LS-W2 series).

2) Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

3) Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the recommended capacitance of its filter capacitor sees (Table 1).



4) Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).


5) No parallel connection or plug and play

The copyright and authority for the interpretation of the products are reserved by MORNSUN


TYPICAL CHARACTERISTICS

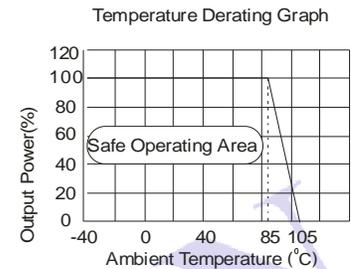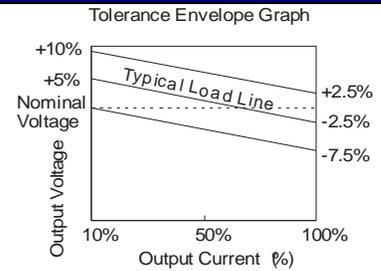

RECOMMENDED CIRCUIT

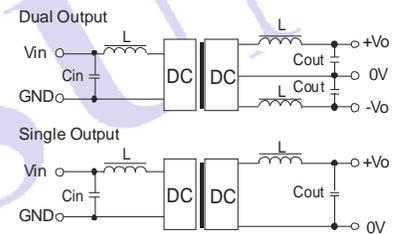

(Figure 1)

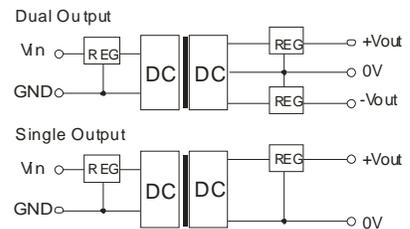

(Figure 2)


EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
3.3/5	4.7	3.3/5	10	±5	4.7
12	2.2	9	4.7	±9	2.2
15	2.2	12	2.2	±12	1
24	1	15	1	±15	0.47
-	-	24	1	±24	0.47

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

OUTLINE DIMENSIONS & PIN CONNECTIONS


MECHANICAL DIMENSIONS

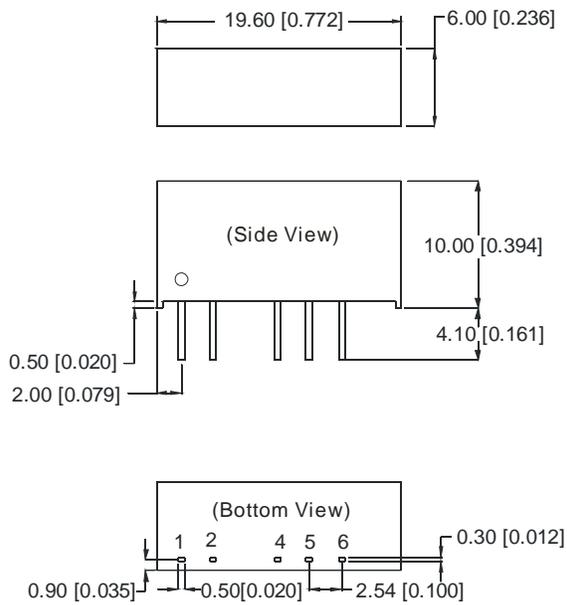


Note:
 Unit:mm[inch]
 Pin section tolerances: $\pm 0.10\text{mm}$ [$\pm 0.004\text{inch}$]
 General tolerances: $\pm 0.25\text{mm}$ [$\pm 0.010\text{inch}$]

FOOTPRINT DETAILS		
Pin	Single	Dual
1	Vin	Vin
2	GND	GND
4	0V	-Vo
5	No Pin	0V
6	+Vo	+Vo

RECOMMENDED FOOTPRINT

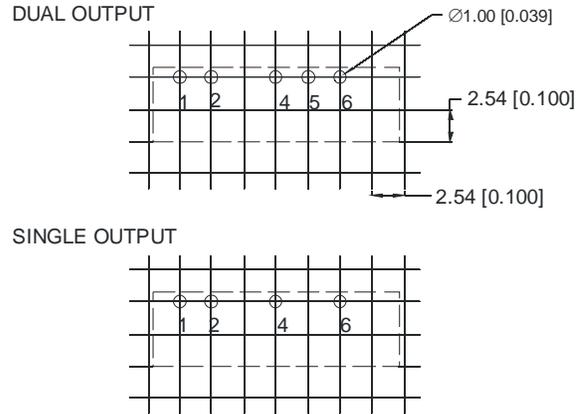

TUBE OUTLINE DIMENSIONS

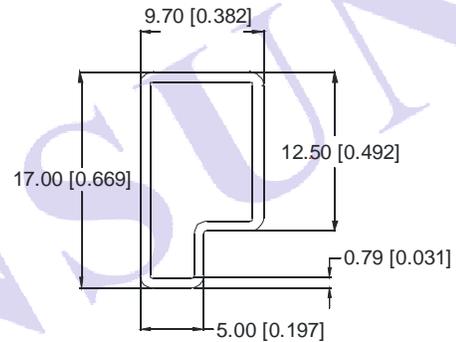

Note:
 Unit :mm[inch]
 General tolerances: $\pm 0.50\text{mm}$ [$\pm 0.020\text{inch}$]
 L=530mm[20.866inch] Tube Quantity: 25pcs
 L=220mm[8.661inch] Tube Quantity: 10pcs

Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product.
2. All specifications measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
3. In this datasheet, all the test methods of indications are based on corporate standards.
4. Only typical models listed, other models may be different, please contact our technical person for more details.