

1

2

3

4

5

A

B

C

D

Specifications:

Current rating:3.0A AC/DC
Contact resistance:20m ohm max.
Insulation resistance:1,000M ohm min.
Withstanding Voltage:600V AC/minute
Temperature Rating:-40°C ~ +105°C





Materials:

Insulator:High Temp. Plastic (UL94V-0)
Contact material:Copper Alloy
Finish:Gold/Matte Tin/Selective Gold Plated

How To Order


2212BR-XXX

G:Gold Plated
T:Matte Tin Plated
SG:Gold Plated On Contact Area,
Matte Tin Plated On Solder Tail.
No. of Contacts

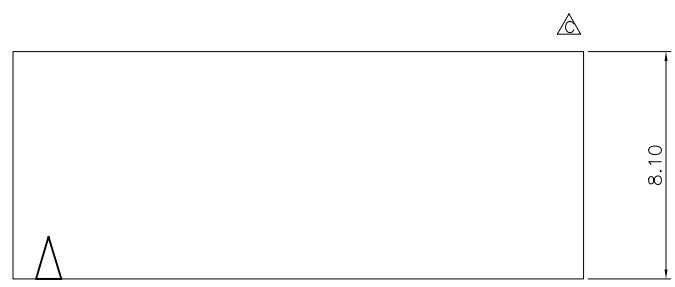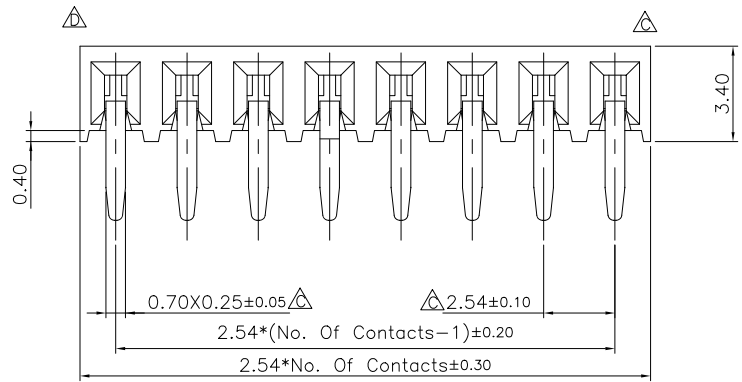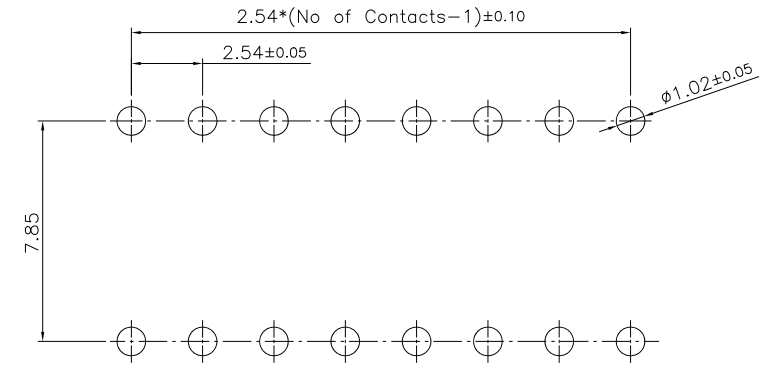

P.C.B. Layout

RoHS Compliant

F				DRAWN: Lisy Liu	GENERAL TOLERANCE: .X=±0.30 .XX=±0.20	<div> Neltron Industrial Co., Ltd.</div>		D
E								
D	23-APR-2024	Update DWG. 	Kyra	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pitch PCB Socket Horizontal Entry	SIZE A4	
C	29-MAR-2024	Update DWG.	Lucy		SCALE:			
B	23-JUN-2022	Dip:3.0mm 	Selin	APPROVAL:	SHEET: 1/1	PART NO: 2212BR-XXX		
A	21-NOV-2019		Lisy		PROJECTION: 			
REV	DATE	FILE	BY	Rory Chen				