



Film Capacitors - Power Electronic Capacitors

General purpose applications

Series/Type:	FilterCap MKP AC – Single phase
Ordering code:	B3236* Series
Date:	2026-07-01
Version:	09

Construction and general data

General data	
Dielectric	Metallized polypropylene film
Resin filling	Non PCB, soft polyurethane
Features	Low dissipation factor Self-healing technology Overpressure disconnecter
Mounting and grounding	Stud on bottom of aluminum can
Cooling	Naturally air-cooled (or forced air cooling)
Degree of protection	IP00
Discharge resistor	Upon request
Reference standards	IEC 61071-2017, UL 810 5th, GB/T 17702-2021, RoHS compliance
Safety approvals	UL 810 approval, file No.: E106388
Terminals	B32361 (M6) and B32362 (M10) series: Screw terminals

B32361

B32362



Figure 1: Capacitor MKP-AC series B32361* and B32362*

Specifications and characteristics

Rated capacitance C_R : 10 ... 600 μ F, Tolerance: $\pm 5\%$

Voltage V_{RMS} (line to line)	Rated AC voltage V_R (line to line)	DC voltage V_{RDC}
250	350	675
330	460	900
480	680	1200

Test data

Voltage between terminals V_{TT}	$2.15 \cdot V_{RMS}, 2 \text{ s}$
Voltage between terminals and Case V_{TC}	4000 V AC, 10 s
Dissipation factor $\tan \delta$ at 100Hz	$\leq 1.0 \cdot 10^{-3}$

Reliability data

Failure in time	100 FIT at 85 °C hotspot, rated voltage
Life test	According to IEC 61071
Life expectancy*	100 000 hours for V_{RMS} , $ \Delta C/C \leq 3\%$

Climatic category 40/70/21

T_{stg}^{**}	-40 ... +85 °C
T_{min}	-40 °C
T_{max}^{***}	+70 °C
T_{hs}^{****}	+85 °C
Max. permissible humidity	95% (test = 21 days)
Max. permissible altitude	2000 m above sea level

Mechanical characteristics

Terminal cross section	Screw terminals - B32361 (M6): 25 mm ² Screw terminals - B32362 (M10) series: 78 mm ²
Max. torque (case)	M12: 12 Nm
Max. torque (for screw terminal)	M6: 4 Nm (B32361 series) M10: 10 Nm (B32362 series)

* Note that this life expectancy occurs for the worst case with a maximum temperature hot-spot of +85° Celsius degree. For other operation temperatures please check the life time curve for further details.

**: T_{stg} – Storage temperature.

***: T_{max} – Maximum operation ambient temperature.

****: T_{hs} – Maximum temperature allowed at the capacitors hot spot. Considering mounting position with terminals to the top. For other mounting positions, please request evaluation.

Considering mounting position with terminals to the top. For other mounting positions, please request evaluation.

Design data

Dimensions (D x H)	According to specification table
Weight approx.	According to specification table
Max. terminal current	M6: 25 A (B32361) M10: 50 A (B32362)

Electrical characteristics: Clearance and creepage distances

Series	Diameter mm	Terminal to terminal		Terminal to case	
		Min. clearance Mm	Min. creepage mm	Min. clearance mm	Min. creepage Mm
B32361	63.5	23	34	10	12
B32362	75	15	55	10	13
B32362	85	15	63	14.5	19

Capacitor catalog number (type or series designation)

FilterCap MKP AC series					A	B	C	D		E	F	G	H	I
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
B	3	2	3	6	1	A	3	1	0	7	J	0	3	0

A. Indicates termination type

1 = M6 (2 x) screw terminals

2 = M10 (2 x) screw terminals

B. Indicates revision status (any letter), in case of S letter it means customized design
C. Indicates first number of voltage V_{RMS} value (any digit)
D. Indicates first and second figure of capacitance value (any two digits)
E. Indicates exponent used as multiplier (any digit)
F. Indicates capacitor tolerance for PEC AC capacitor

J = $\pm 5\%$; K = $\pm 10\%$;

G. Indicates coded capacitance value
H. Indicates second number of voltage V_{RMS} value (any digit)
I. Indicates Accessories (any digit)

B32361B3107J030

100 μ F

U_{RAC}/U_{RMS}

U_{RDC}/U_N

$\pm 5\%$

330V~

900V-

IEC 61071-1/2 50/60Hz $U_i=4/-Kv$
 Overpressure disconnecter SH
 No PCB -40...+70°C
 Protected 10K AFC File E106388
 Discharge before handling
 Made by TDK 50 Z 2025

123456789001

Label information
Date code explanation
WW Z YYYY

WW Z YYYY: production weeks (e.g.: 50)

WW Z YYYY: produced in Zhuhai (China)

WW Z YYYY: production year (e.g.: 2025)

Bar code explanation


Bar code consists of batch number and serial number.

Batch number: 9 digits (e.g.: 123456789)

Serial number: 2 or 3 digits (e.g.: 01 or 001)


Note: the voltage values in the label have to be understood as for U_{RAC}/U_{RMS} the value shows is the U_{RMS} (V_{RMS}) voltage and in U_{RDC}/U_N the value shows is the U_{RDC} (V_{RDC}) voltage.

Dimensional drawings

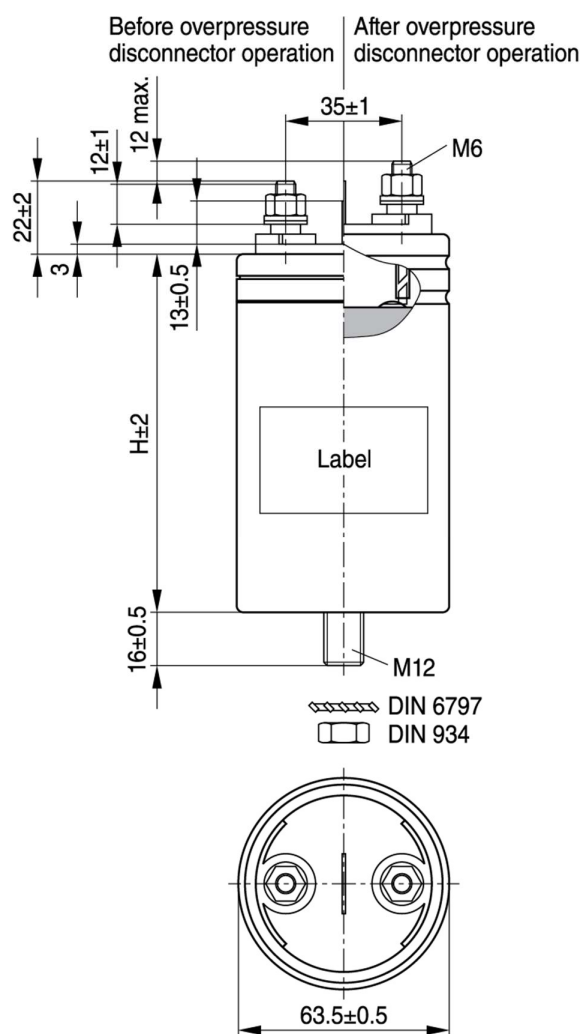

KLK2309-G-E

Figure 2: Series B32361

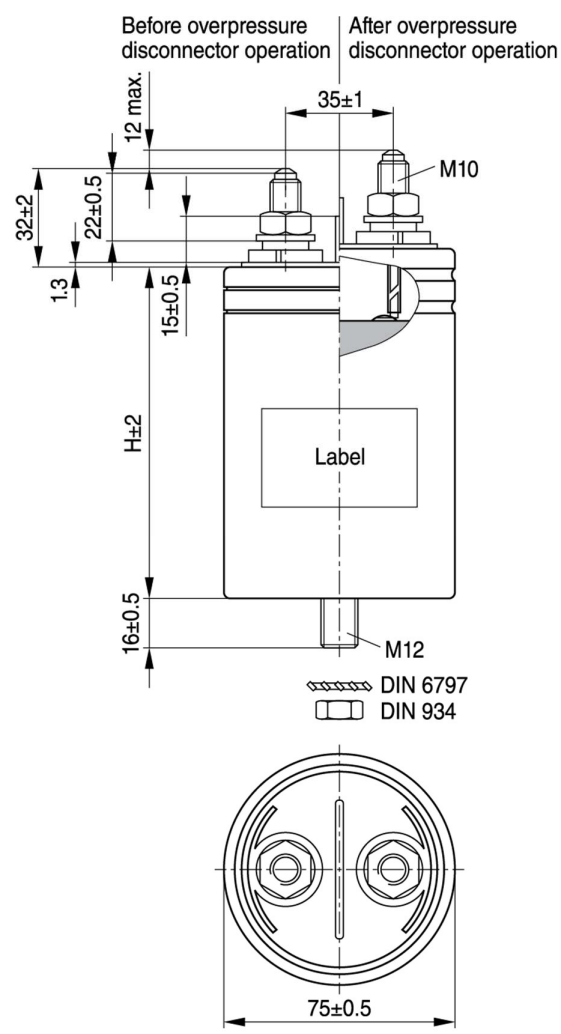

KLK2310-A-E

Figure 3: Series B32362 (D = 75 mm)

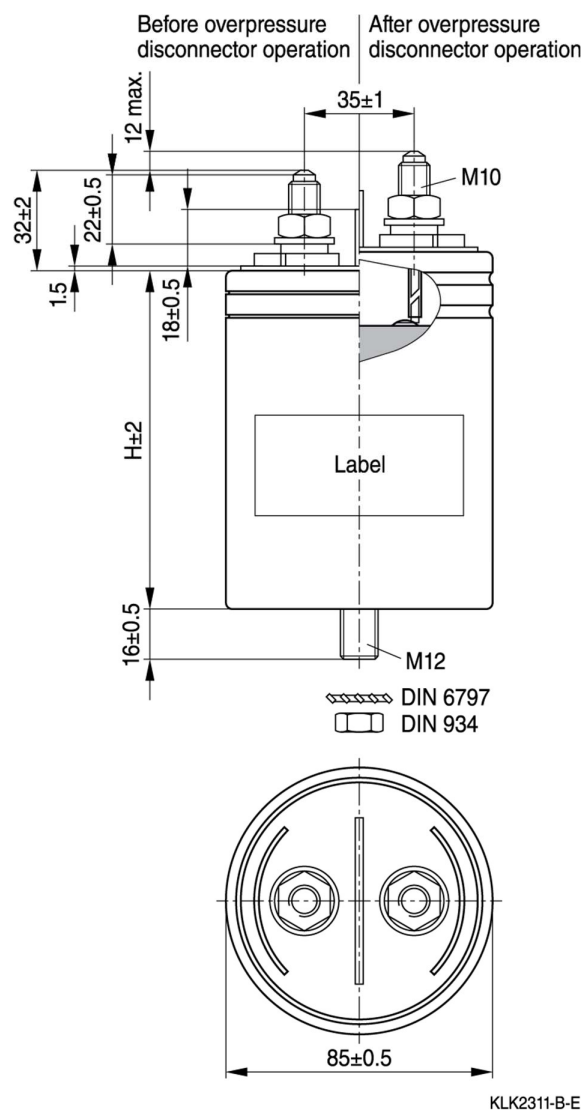


Figure 4: Series B32362 (D = 85 mm)

Installation space requirements

- 1) A minimum distance of 20 mm between the capacitors is necessary to maintain sufficient cooling.
- 2) Keep at least 20 mm space above the capacitor and do not attach any mounting components at the crimp or on top. This gap will allow a longitudinal extension of the can in order to ensure that the over-pressure disconnecter can fully extend.

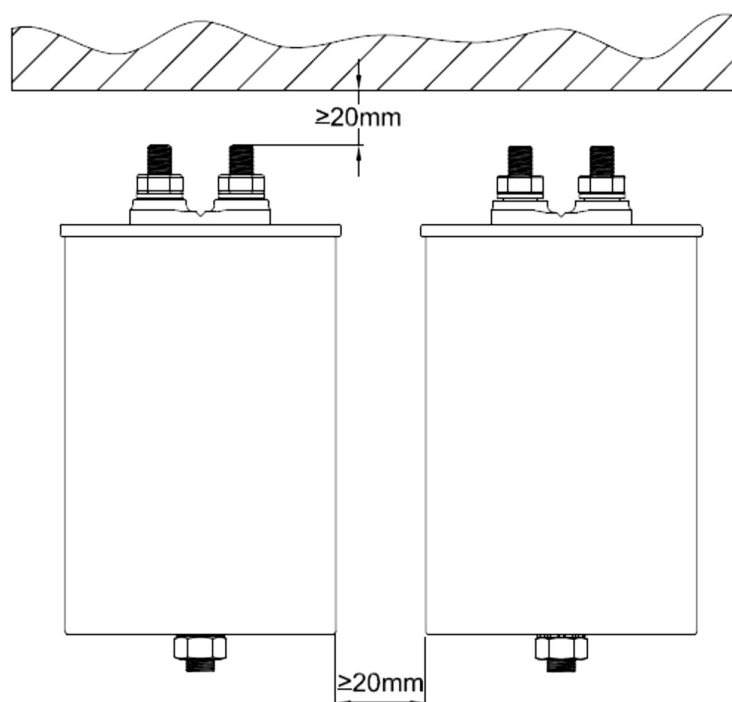


Figure 5: Installation space requirements

Note: For further details, please check installation manual for AC filtering capacitors.

Technical data of standard products

B32361 series – M6 screw terminals

V_R / V_{RMS} V	C_R μF	Ordering code	I_{max} A	$\hat{I}$ A	I_s kA	R_s m Ω	L_{self} nH	D mm	H mm	Weight kg	Packing unit
350 / 250	50	B32361A2506J050	25	1250	3.8	3.7	195	63.5	70	0.3	12
	60	B32361A2606J050	25	1500	4.5	3.6	195	63.5	70	0.3	12
	70	B32361A2706J050	25	1300	3.8	4.2	220	63.5	82	0.3	12
	80	B32361A2806J050	25	1500	4.4	4.1	220	63.5	82	0.3	12
	100	B32361A2107J050	25	1200	3.6	5.5	225	63.5	107	0.4	12
	150	B32361A2157J050	25	1300	4.0	6.3	265	63.5	132	0.5	12
	200	B32361B2207J050	25	1600	4.8	6.3	275	63.5	142	0.6	12
460 / 330	50	B32361B3506J030	18	920	2.7	4.4	220	63.5	82	0.3	12
	60	B32361A3606J030	18	720	2.1	6.2	225	63.5	107	0.4	12
	70	B32361A3706J030	20	840	2.5	5.8	225	63.5	107	0.4	12
	80	B32361A3806J030	25	960	2.8	5.5	225	63.5	107	0.4	12
	100	B32361B3107J030	25	880	2.6	6.9	265	63.5	132	0.5	12
680 / 480	10	B32361A4106J080	10	400	1.2	4.8	195	63.5	70	0.3	12
	15	B32361A4156J080	15	600	1.8	4.1	195	63.5	70	0.3	12
	20	B32361A4206J080	20	800	2.4	4.3	195	63.5	70	0.3	12
	25	B32361A4256J080	25	750	2.2	5.2	220	63.5	82	0.3	12
	30	B32361A4306J080	25	800	2.6	4.8	220	63.5	82	0.3	12
	40	B32361A4406J080	20	750	2.3	6.6	225	63.5	107	0.4	12
	50	B32361A4506J080	25	950	2.9	6.0	225	63.5	107	0.4	12
	60	B32361A4606J080	25	850	2.6	7.7	265	63.5	132	0.5	12
	70	B32361A4706J080	25	900	2.7	8.0	275	63.5	142	0.6	12

B32362 series – M10 screw terminals

V_R / V_{RMS} V	C_R μF	Ordering code	I_{max} A	$\hat{I}$ A	I_s kA	R_s m Ω	L_{self} nH	D mm	H mm	Weight kg	Packing unit
350 / 250	150	B32362A2157J050	35	1800	5.4	2.5	185	75	117	0.7	12
	200	B32362B2207J050	50	2400	7.2	2.1	185	85	117	0.8	12
	250	B32362A2257J050	40	2000	6.0	3.0	210	75	152	0.9	12
	300	B32362A2307J050	50	3600	10.8	1.7	200	75	197	1.1	12
	400	B32362A2407J050	50	4800	14.4	1.5	200	85	197	1.3	12
	500	B32362B2507J050	50	4400	13.3	1.9	230	85	247	1.7	12
	600	B32362B2607J050	50	5300	16.0	1.8	230	85	247	1.7	12
460 / 330	100	B32362A3107J030	30	1450	4.3	2.8	185	75	117	0.7	12
	150	B32362A3157J030	30	1450	4.3	3.7	210	75	152	0.9	12
	200	B32362B3207J030	40	1900	5.8	3.1	210	85	152	1.0	12
	250	B32362A3257J030	50	3600	10.8	1.7	200	85	197	1.3	12
	300	B32362A3307J030	50	4300	12.9	1.6	200	85	197	1.3	12
	400	B32362A3407J030	50	3850	11.6	2.1	240	85	267	1.8	12
680 / 480	60	B32362A4606J080	30	1150	3.4	3.2	185	75	117	0.7	12
	70	B32362A4706J080	50	2050	6.2	1.7	180	75	147	0.9	12
	80	B32362A4806J080	50	1350	7.1	1.6	180	75	147	0.9	12
	100	B32362A4107J080	50	1900	5.7	2.3	200	75	197	1.1	12
	150	B32362A4157J080	50	2850	8.6	1.9	200	85	197	1.3	12
	200	B32362A4207J080	50	2850	8.5	2.3	230	85	247	1.7	12
	250	B32362A4257J080	50	3200	9.6	2.3	240	85	267	1.8	12

Display of ordering codes for TDK Electronics products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications, on the company website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under www.tdk-electronics.tdk.com/orderingcodes.

Terms

Design

The winding element of the MKP capacitor consists of metallized polypropylene film. This winding construction achieves low losses and a high pulse-current withstand capability. Soft PU resin is used for impregnation of the capacitor.

Contacting

The end faces of the windings are contacted by metal spraying to ensure a reliable and low-inductance connection between the leads and layers. The leads are welded or soldered to these end faces, brought out through insulating elements (plastic) and soldered to the terminals.



Impregnation

All hollows between the windings and between the windings and the case are filled with an impregnating agent. Besides increasing dielectric strength, this improves heat dissipation from inside a capacitor. The impregnating agents that we use are free of PCB and halogens.

Self-healing

All MKP capacitors are self-healing, i.e. voltage breakdowns heal in a matter of microseconds and hence do not produce a short circuit.

Breakdowns can occur under heavy electrical load as a result of weaknesses or pores in the dielectric. The integrity of self-healing capacitors is not affected by such breakdowns.

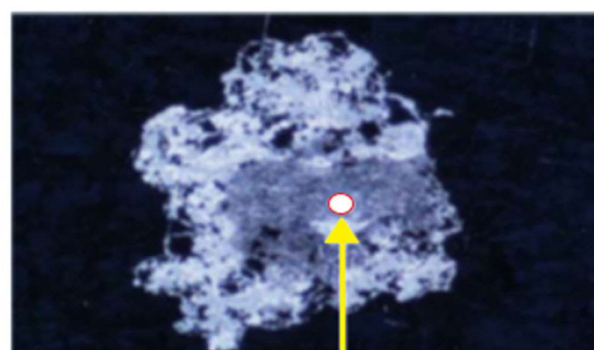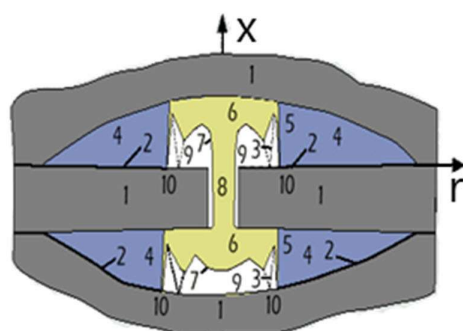

Breakdown

1. Dielectric (Polypropylene)
2. Metallization
3. Material-displacing shock wave
4. Air gap with metal vapor
- 5.6. Plasma zone

7. Boundary layer between gas-phase dielectric and plasma zones
8. Puncture channel
9. Gas-phase dielectric
10. Zone of displaced metallization and dielectric

Figure 6: Description of Self-healing technology

When a breakdown occurs, the dielectric in a breakdown channel is broken down into its atomic components by the electric arc that forms between the electrodes. At the high temperatures of as much as 6000 K, a plasma is created that explodes out of the channel region and pushes the dielectric layers apart. The actual self-healing process starts with the continuation of the electric arc in the propagating plasma. Here the metal layers are removed from the metal edges by evaporation. Insulation areas are formed. The rapid expansion of the plasma beyond the areas of insulation and its cooling in the areas of less field strength allow the discharge to extinguish after a few microseconds.

The area of insulation that is created is highly resistive and voltage-proof for all operating requirements of the capacitor. The self-healing breakdown is limited in current and so it does not represent a short circuit. The self-healing process is so brief and low in energy that the capacitor also remains fully functional during the breakdown.

Characteristics

Equivalent circuit diagram

Any real capacitor can be modelled by the following schematic:

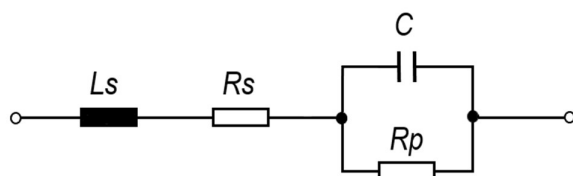


Figure 7: Equivalent circuit diagram

Symbol	Description	Unit
L_s	series inductance	H
R_s	series resistance, due to contacts (leads, sprayed metal and film metallization)	Ω
R_p	parallel resistance, due to insulation resistance	Ω
C	capacitance	F

C , R_s and L_s are magnitudes that vary in the frequency domain (AC).

R_p is a magnitude defined in DC (insulation resistance).

Rated capacitance C_R

It is referred to a test temperature of +20 °C and a measuring frequency range of 50 Hz to 1 kHz.

Capacitance tolerance range

It is the range within which the actual capacitance may differ from rated capacitance. The actual capacitance is to be measured at a temperature of +20 °C. This range results from variances in materials and manufacturing processes. The standard manufacturing tolerance for PP film capacitors is $\pm 10\%$ or 'K' tolerance or $\pm 5\%$, 'J' tolerance.

Temperature dependence of capacitance

The capacitance variation in the permissible temperature range is not linear, but it is reversible. the characteristic change in capacitance $\Delta C/C$ as a function of test temperature is shown as follows:

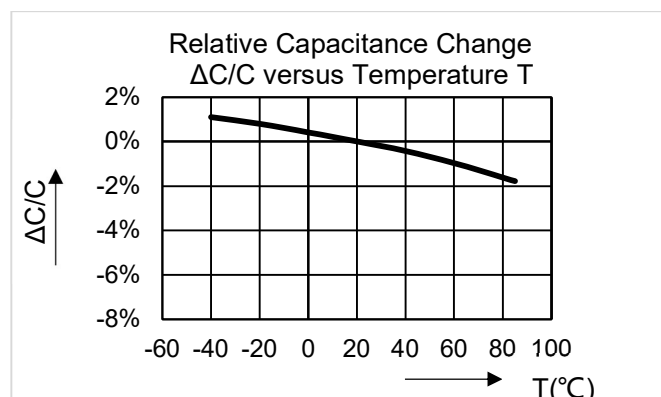


Figure 8: Temperature dependence of capacitance

Capacitance drift

Capacitance is subject to irreversible in addition to reversible changes, i.e. capacitance drift, the sum of all time-dependent irreversible changes of capacitance during operating life. This variation is stated in percent of the value at delivery. The typical figure is +1/-3%.

Rated AC voltage V_R

The maximum operating peak recurrent voltage of either polarity of a reversing type waveform for which the capacitor has been designed.

Unlike what is common in other standard (e.g. B32304* 3-phase capacitor series for PFC application) therefore, the rated voltage V_R is not the RMS value, but the maximum or peak value of the capacitor voltage. The voltage at which the capacitor may be operated is dependent on other factors (especially current and frequency) besides rated voltage.

Voltage V_{RMS}

It is the Root Mean Square (RMS) voltage of maximum permissible value of sinusoidal AC voltage in continuous operation.

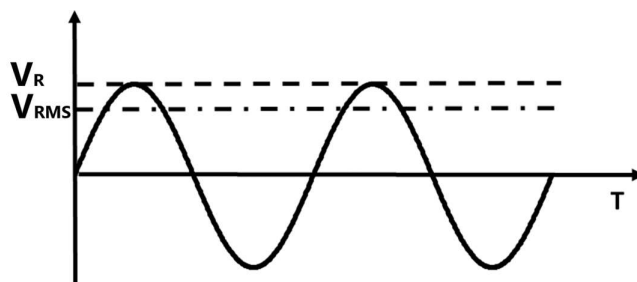


Figure 9: Voltage V_{RMS}

Rated DC voltage V_{RDC}

It is the maximum operating peak voltage of either polarity but of non-reversing type waveform. for which the capacitor has been designed. for continuous operation.

Non-recurrent surge voltage V_s

A peak voltage induced by a switching or any other disturbance of the system which is allowed for a limited number of times and for durations shorter than the basic period.

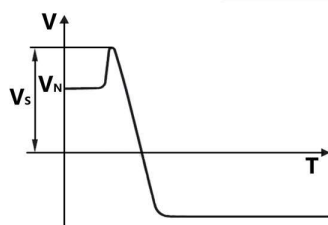


Figure 10: Non-recurrent surge voltage V_s

Maximum duration: 50 ms/pulse

Maximum number of occurrences: 1000 (during load)

Max. Recurrent peak voltage $\hat{u}$

This is the permissible. max. Recurrent peak voltage that may appear for max.1% of the period.

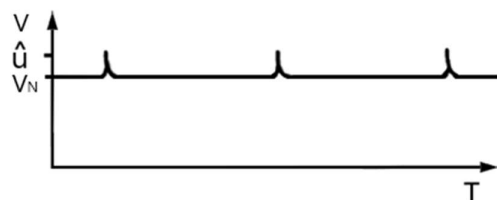


Figure 11: Max. Recurrent peak voltage $\hat{u}$

Symmetric alternating voltage $\hat{u}_{ac}$

The peak values of a symmetrical alternating voltage applied to the capacitor is a decisive factor for the dielectric losses.

$$\text{For AC capacitors: } \hat{u}_{ac} = V_R$$

Insulation voltage V_i

It is the rms rated value of the insulation voltage of capacitive elements and terminals to case or earth. If not specified. the rms value of the insulating voltage is equivalent to the rated voltage divided by $\sqrt{2}$.

Maximum current I_{max}

It is the maximum rms current for continuous operation which could not be higher than maximum terminal current.

Note that rms current with different harmonic distortions could generate different self-heating

temperatures. A higher current than I_{max} value could be possible if the hot-spot temperature (T_{hs}) is lower than 85°C and self-heating temperature is lower 25 °C (avoiding local over heating). On the contrary, same rms current with more harmonic distortions at higher frequency could have higher self-heating temperature that makes T_{hs} higher than 85 °C (dangerous for capacitor). For that reason, **we strongly suggest end customers to qualify capacitor using samples with thermal couples temperature sensor (upon request) in order to verify the real operating temperature inside of capacitor under real application or to check with TDK company for detail discussions.**

Maximum peak current $\hat{I}$

It is the maximum current amplitude which occurs instantaneously during continuous operation. The maximum peak current and the maximum rate of voltage rise (dV/dt)_{max} on a capacitor are related as follows:

$$\hat{I} = C_R \cdot \left(\frac{dV}{dt} \right)_{\max}$$

Maximum surge current I_s

It is the peak non-repetitive current induced by switching or any other disturbance of the system permitted for a limited number of times, at durations shorter than the basic period.

$$I_s = C_R \cdot \left(\frac{dV}{dt} \right)_s$$

Maximum duration: 50 ms/pulse

Maximum number of occurrences: 1000 (during load)

Fault current (AFC)

It is a failure mode in which capacitor is intentionally internally faulted to represent dielectric breakdown that would occur within the capacitor over time.

The fault current test is intended to address protection of the capacitor from available fault currents over the life of the capacitor. The maximum fault current test levels represent a complete internal dielectric breakdown in the capacitor with the maximum fault current available. The lower fault current test levels represent the various stages of internal dielectric breakdown during the life of the capacitor where the available fault current will be less.

Self-inductance L_{self}

The self-inductance is produced by the inductance of the terminals and the windings. Because of the special kind of contacting in self-healing capacitors (large area metal spraying covering all windings), the self-inductance is particularly low. It allows the resonance frequency to be determined:

$$f = \frac{1}{2\pi\sqrt{L_{\text{self}} \cdot C_R}}$$

The resonance frequency is high for all capacitors accordingly.

Insulation Resistance (R_{ins})

The dielectric of a capacitor has a large area and a short length. Even if the material is a good isolator there always flows a certain current between the charged electrodes (the current increases exponentially with the temperature). This leakage can be described as a parallel resistance with a high value, an Insulation Resistance.

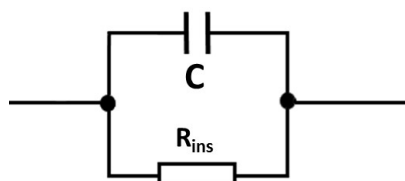


Figure 12: Insulation Resistance (R_{ins})

Insulation resistance and self-discharge time constant

The insulation values for the individual components according to the capacitance are stated as an insulation resistance R_{ins} in $M\Omega$ or a self-discharge time constant τ in seconds.

$$\tau = R_{ins} \cdot C_R$$

Series resistance R_s

Resistive losses occur in the electrodes in the contacting and in the inner wiring. These are comprised in the series resistance R_s of a capacitor.

The series resistance R_s generates the ohmic losses ($I^2 \times R_s$) in a capacitor. It is largely independent of frequency. The figures stated in selection charts apply to +20 °C capacitor temperature.

Dissipation factor $\tan \delta$

The equivalent circuit diagram used for the losses in a capacitor can be shown as follows:



Figure 13: Simplified equivalent circuit diagram of a capacitor

Symbol	Description	Unit
C	Capacitor	F
L_{self}	Self-inductance	H
ESR	Equivalent series resistance, representing the entire active power in capacitor	Ω

The self-inductance and capacitance of a capacitor produce its resonance frequency (natural frequency).

$$\tan \delta(f) = \tan \delta_0 + R_s \cdot \omega \cdot C$$

From the frequency dependence of the equivalent series resistance can be derived:

$$ESR = \frac{\tan \delta}{\omega \cdot C} = R_s + \frac{\tan \delta_0}{\omega \cdot C}$$

Symbol	Description	Unit
$\tan \delta$	Dissipation factor of capacitor	-
$\tan \delta_0$	Dissipation factor of dielectric	-
R_s	Series resistance	Ω

Dielectric dissipation factor $\tan \delta_0$

The dissipation factor $\tan \delta_0$ of the dielectric is assumed to be constant for all capacitors in their frequency range of use. The figures stated in data sheets apply to rated operation.

Expected Fit rate λ

The FIT (Failure In Time) of a component is defined as the number of expected failures in 109 hours of operation.

The FIT rate is calculated on the basis of the number of components operating in the field and the estimated hours of operation. All the reports of failures are taken into consideration for this calculation, which is updated every year. The other values in the graph are given as indication and calculated based on acceleration factors.

Thermal design

In order to scale a capacitor correctly for a particular application, the permissible ambient temperature has to be determined. This can be taken from the diagram "Permissible ambient temperature T_A vs total power dissipation P " after calculating the power dissipation (for further details please check individual data sheets).

Calculation of power dissipation P

The total power dissipation P is composed of the dielectric losses (P_D) and the resistive losses (P_R): Generally a secondary sinusoidal AC voltage can be used for calculating with sufficient accuracy.

$$P = P_D + P_R$$

$$P_D = \hat{u}_{ac}^2 \cdot \pi \cdot f_0 \cdot C \cdot \tan \delta_0$$

Symbol	Description	Unit
$\hat{u}_{ac}$	Peak value of symmetrical AC voltage applied to capacitor	V
f_0	Fundamental frequency	Hz
C	Capacitance	F
$\tan \delta_0$	Dissipation factor of dielectric	

$$P_R = I^2 \cdot R_S$$

Symbol	Description	Unit
I	RMS value of capacitor current	A
R _S	Series resistance at maximum hot-spot temperature	Ω

The R_S figure at maximum hot-spot temperature is used to calculate the resistive losses. In selection charts and data sheets the figure is stated for 20 °C capacitor temperature. The conversion factor is as follows:

$$R_{S85^\circ} = 1.25 \cdot R_{S20^\circ}$$

Thermal resistance R_{th}

The thermal resistance is defined as the ratio of a temperature difference and the power dissipation produced in a capacitor. The decisive factor here is ΔT_{cap} where the temperature difference between an external reference point of the coolant (e.g. air) surrounding the capacitor and the hot spot (zone with highest temperature occurring in the component). In a steady state:

$$R_{th} = \frac{\Delta T_{cap}}{P}$$

Symbol	Description	Unit
R _{th}	Thermal resistance	K/W
ΔT _{cap}	Temperature difference between hot-spot and ambient	K
P	Power dissipation	W

The temperature difference depends on a large number of different factors. The thermal resistance is a function of several parameters such as the working temperature and the power dissipation of the capacitor.

After installation of the capacitor, it is necessary to verify that maximum hot-spot temperature is not exceeded at extreme service conditions. For detail calculations, please refer to single datasheet part number for further details.

Life expectancy t_{LD}

The life expectancy t_{LD} is based on the exclusive effect of Voltage and Temperature (hot-spot T_{hs}) applied to the capacitor dielectric and electrodes (other factors are not considered in the model such as environmental or mechanical effects).

Hot Spot Temperature (T_{hs}): as the sum of ambient temperature plus the heating induced by the current (I_{RMS}) in the dielectric which is measured inside of capacitor. Current is an indirect parameter under consideration which affects the temperature T_{hs}.

Lifetime estimation formula as follows:

$$t_2 = t_1 \cdot e^{(T_1 - T_2)/A} \left(\frac{V_1}{V_2} \right)^n$$

Symbol	Description	Unit
t_2	Estimated lifetime at temperature T_2 and Voltage V_2	hour
t_1	Reference life expectancy (e.g. 100 000 hours for V_R $ \Delta C/C \leq 3\%$)	hour
V_2	Variable Voltage (Rated AC voltage)	VAC
V_1	Reference Voltage (Rated AC voltage)	VAC
T_1	Reference temperature (e.g. 70 °C)	°C
T_2	Variable temperature	°C
A	Acceleration factor of temperature	-
n	Acceleration factor of voltage	-

Lifetime Expectancy Graphs

The lifetime estimations below show the standard expected lifetime of 100000 hours (at +85 °C hot-spot) are only theoretical calculations based on endurance test results performed according to IEC61071 standard during operation as shown in figure 14.

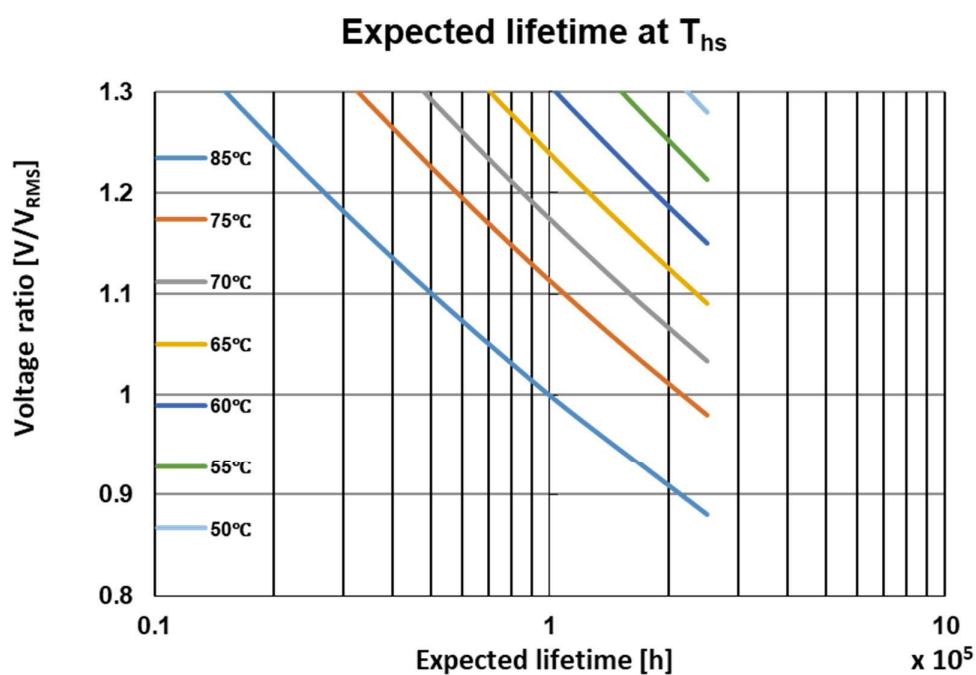


Figure 14: Expected lifetime in hours at different hotspot temperatures (T_{hs}) and voltages V_{RMS} .

Cautions and warnings

- In case of dents of more than 1 mm depth or any other mechanical damage, capacitors must not be used at all.
- Check tightness of the connections/terminals periodically.
- The energy stored in capacitors may be lethal. To prevent any chance of shock, discharge and short-circuit the capacitor before handling.
- Failure to follow cautions may result, worst case, in premature failures, bursting and fire.
- Protect the capacitor properly against over current and short circuit.
- TDK Electronics is not responsible for any kind of possible damages to persons or things due to improper installation and application of capacitors for power electronics.

Safety

- Electrical or mechanical misapplication of capacitors may be hazardous. Personal injury or property damage may result from bursting of the capacitor or from expulsion melted material due to mechanical disruption of the capacitor.
- Ensure good, effective grounding for capacitor enclosures.
- Observe appropriate safety precautions during operation (self-recharging phenomena and the high energy contained in capacitors).
- Handle capacitors carefully, because they may still be charged even after disconnection.
- The terminals of capacitors, connected bus bars and cables as well as other devices may also be energized.
- Follow good engineering practice.
- The maximum permissible fault current (AFC) of 10 kA in accordance with the UL 810 standard must be assured by the application.

Handling

- Do not handle the capacitor before it is discharged! When handling the capacitor, do not take the capacitor from the terminal. This can cause accidents in case the capacitor is charged and additionally the terminal could break

Thermal load

- After installation of the capacitor, it is necessary to verify that maximum hot-spot temperature is not exceeded at extreme service conditions.

Installation

- Capacitors must be installed in a cool and well-ventilated place, away from objects that radiate heat, or from direct sunlight. Within high-power inverter systems the capacitors usually produce the smallest portion of the total losses, and the permissible operating temperatures are low compared

to power semiconductors, reactors and resistors. So, the distance between capacitor and heating sources must be far enough to prevent the capacitor from overheating.

- In case of space constraint to make the best possible use of capacitors, technically and economically, it is advisable to supply forced cooling air.

Mechanical protection

- The capacitor has to be installed in a way that mechanical damages and dents in the aluminum can are avoided.

Connecting

- Ensure firm fixing of terminals, fixing torque to be applied as per individual specification.
- In any case, the maximum specified terminal current may not be exceeded. Please refer to the technical data of the specific series.

Grounding

- The threaded bottom stud of the capacitor must be used for grounding. In case grounding is done via metal chassis where the capacitor is mounted on, the layer of varnish beneath the washer and nut should be removed. In case, capacitor with plastic case, this is not applicable. Ensure the tightening torque does not exceed the specified limit.

Maintenance recommendation

- Disregarding the following measures may result in severe operation failures, bursting and fire:
 - Check tightness of the connections/terminals periodically.
 - Clean the terminals/bushings periodically to avoid short circuits due dust or other contamination.
 - Ensure the current does not exceed the limit.
- In case of a current above the nominal current check your application for modification.
- Check the temperature of energized capacitors. In case of excessive temperature of individual capacitors, it is recommended to replace this capacitor, as this could be an indication for loss factor increase, which is a sign for reaching end of life.

Storage and operating conditions

- Do not use or store capacitors in corrosive atmosphere. especially where chloride gas. sulfide gas. acid. alkali. salt or the like are present. In dusty environments regular maintenance and cleaning especially of the terminals is required to avoid conductive path between phases and/or phases and ground.
- Capacitors must not be stored in high temperatures and/or high humidity for long periods. We recommend the following storage conditions.
 - Storage temperature -40 °C ~ +40 °C
 - Maximum relative humidity 80%. no dew allowed on the capacitor

- Storage should not exceed 2 years (from datecode printed on the capacitor). After 1 year of storage time, capacitors must be checked electrically.

Overpressure disconnecter

- To ensure full functionality of an overpressure safety device disconnecter, the following must be observed:
 1. The elastic elements must not be hindered, i.e.
 - Connecting lines must be flexible leads (cables)
 - There must be sufficient space (min. 20 mm) for expansion above the connections
 - Metal cover must not be retained by rigid parts like bus bars.
 2. Stress parameters of the capacitor must be within the IEC 61071-2017 specification.

NOTE 1 As the actual conditions can be significantly different in service, the behavior at the end of life may also be different. Stored energy, expected short-circuit current, duration of failure current (and so on) has to be considered in the application. Compliance with IEC 61071-5.16 does not guarantee safe end of life of a capacitor.

NOTE 2 Successful completion of the IEC 61071-5.16 test is not sufficient to guarantee the total safe failure of the components in service. For this reason, there is a residual risk of fire and/or explosions that has to be carefully taken into consideration.

Lifetime expectancy

- As a rule, TDK Electronics is unfamiliar with individual customer applications or less familiar with them than the customers themselves. The results will not contain the various influences which might occur in respect to TDK products, when TDK products will be incorporated into the customer application. For these reasons, it is ultimately incumbent on the customer to check and decide whether a TDK product with the properties described in the product specification is suitable for use in a particular customer application.
- We also point out that in individual cases a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.

Display of ordering codes for TDK Electronics products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications, on the company website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under www.tdk-electronics.tdk.com/orderingcodes.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.
7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard**. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System**. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.

Important notes

8. The trade names EPCOS, CarXield, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, FilterCap, FormFit, InsuGate, LeaXield, MediPlas, MiniBlue, MiniCell, MKD, MKK, ModCap, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PiezoBrush, PlasmaBrush, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SurfIND, ThermoFuse, WindCap, XieldCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2024-02

March 27, 2024

Information Note

Barcode change for B3236* series of power capacitors

The barcode printed on the label of EPCOS MKP AC power capacitors series B3236* will show an additional digit and change from eleven to twelve digits. The products themselves remain unchanged, there is no impact on the electrical performance, reliability, and mechanical dimensions as stated on the data sheets.

Affected products

Ordering code			
B32361A2107J050	B32361A4256J080	B32362A3127J032	B32362B2507J050
B32361A2137J050	B32361A4256J081	B32362A3157J030	B32362B2607J050
B32361A2157J050	B32361A4306J080	B32362A3157J030	B32362B3207J030
B32361A2157J051	B32361A4306J081	B32362A3207J030	B32362B3407J030
B32361A2157K050	B32361A4406J080	B32362A3257J031	B32362C2407K051
B32361A2206J050	B32361A4506J080	B32362A3307J030	B32362C2407K052
B32361A2207J050	B32361A4506J081	B32362A3307J030	B32362C3107J030
B32361A2207J052	B32361A4506J081	B32362A3337J030	B32362C3207J030
B32361A2506J050	B32361A4606J080	B32362A3407J030	B32362C3407J030
B32361A2506J051	B32361A4606J081	B32362A3407K030	B32362C4107J000
B32361A2606J050	B32361A4706J080	B32362A3476J030	B32362C5107J000
B32361A2706J050	B32361B2207J050	B32362A4107J080	B32362C5107J001
B32361A2756J050	B32361B3107J030	B32362A4127J080	B32362C5137J300
B32361A2806J050	B32361B3506J030	B32362A4157J080	B32362C5137J301
B32361A2806J050	B32361S2107J050	B32362A4257J080	B32362S2407J050
B32361A3506J030	B32361S5926A000	B32362A4257J081	B32362S3207J030
B32361A3606J030	B32361S5926A081	B32362A4606J080	B32362S3207J040
B32361A3706J030	B32362A2157J050	B32362A4606J080	B32362S3207J041
B32361A3806J030	B32362A2157J050	B32362A4706J080	B32362S3307J030
B32361A4106J080	B32362A2257J050	B32362A4706J081	B32362S3507J030
B32361A4106J081	B32362A2307J050	B32362A4806J080	B32362S4257J080
B32361A4106J081	B32362A2307J050	B32362A5257J000	B32362S4996A000
B32361A4156J080	B32362A2337J050	B32362A5336J020	B32364A3506J030
B32361A4206J080	B32362A2407J050	B32362A5476J020	B32364A3806J031
B32361A4206J081	B32362A2507J050	B32362A5686J020	B32364A4506J080
B32361A4206K000	B32362A3107J030	B32362B2207J050	B32364B2207J050
		B32362B2337J050	

TDK Electronics AG



Rosenheimer Strasse 141 e, 81671 Munich · Post: P.O.Box 80 17 09, 81617 Munich, Germany
 Headquarters: Munich · Commercial register of the local court (Amtsgericht): Munich HRB 127250
 Chairman of the Supervisory Board: Joachim Zichlarz
 Management Board: Dr. Werner Lohwasser, Chairman · Juergen Holzinger
www.tdk-electronics.tdk.com

CAP
Power Capacitors
 Internal / External

240327CAP1e

March 27, 2024

Comparison of previous and new barcode label

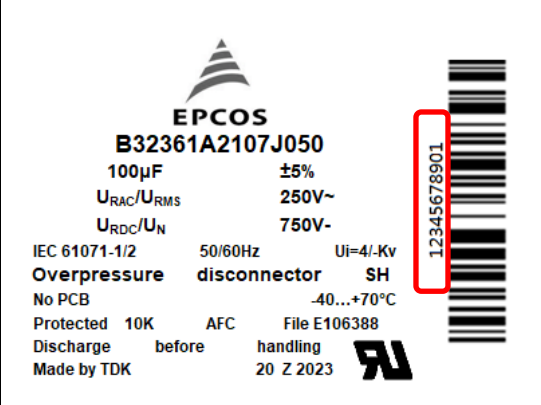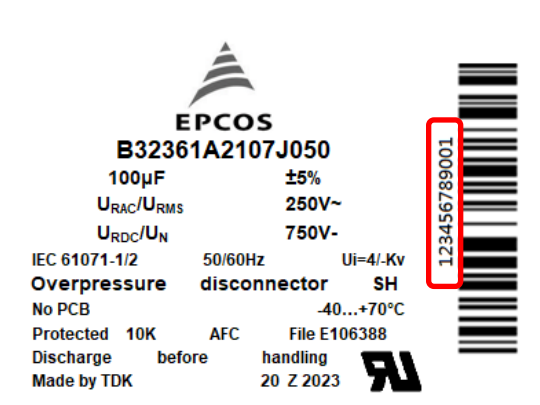Previous: 11-digit barcode label	New: 12-digit barcode label
 EPCOS B32361A2107J050 100µF ±5% U_{RAC}/U_{RMS} 250V~ U_{RDC}/U_N 750V- IEC 61071-1/2 50/60Hz $U_i=4/-Kv$ Overpressure disconnecter SH No PCB -40...+70°C Protected 10K AFC File E106388 Discharge before handling Made by TDK 20 Z 2023	 EPCOS B32361A2107J050 100µF ±5% U_{RAC}/U_{RMS} 250V~ U_{RDC}/U_N 750V- IEC 61071-1/2 50/60Hz $U_i=4/-Kv$ Overpressure disconnecter SH No PCB -40...+70°C Protected 10K AFC File E106388 Discharge before handling Made by TDK 20 Z 2023

Scheduled date of introduction: October 1, 2024

Enclosure IN (ID No. FILM P24.005)

Contact Anderson Estancovich, CAP FILM ES MKP PM, Munich

Customers are asked to address inquiries directly to their sales contacts.

Information Note

1. ID No. FILM P24.005		2. Date of announcement March 27, 2024	
3. Product / product group Power capacitors	Old ordering code B3236*	New ordering code No change	Customer part number No change
4. Description of change The barcode of the B3236* series will show an additional digit, going from 11 to 12 digits as per Annex 1			
5. Effect on the product or for the customer (benefit, quality, specification, lead time) No effect on the electrical performance, reliability and mechanical dimensions as shown on the data sheet(s).			
6. Quality assurance measures / risk assessment The change implementation follows the relevant internal quality procedures.			
7. Scheduled date of change 01.10.2024			
8. Estimated date of first delivery of changed product 01.10.2024 ☒ For an interim period we cannot rule out that old as well as new products will be shipped. ☐ Future shipments can consist of old and new products as the new changed product is used as an alternative to the old product.			
Quality Management Name Anja Kalmes		Signature Signed Anja Kalmes	
Product Marketing Name Anderson Estancovich Tel. +49 175 66 10 812 Email anderson.estancovich@tdk.com		Signature Signed Anderson Estancovich	
Customers are asked to address inquiries directly to their sales contacts.			

March 27 2024

PCN - Barcode change for B3236 series of power capacitors

AFFECTED PARTS

B32361A3806J30Z1
B32361A4306J80Z1
B32361B3107J30Z1
B32362S3207J40Z1
B32362A4706J81Z1
B32362A4257J80Z1
B32361A4506J80Z1
B32362A2307J50Z1
B32362B2207J50Z1
B32364A3806J31Z1
B32362S3207J41
B32362S4996AZ1
B32361A2107J50Z1
B32361A2157J50Z1
B32361B2207J50Z1
B32362B3207J30Z1
B32362A4107J80Z1
B32361A4206J80Z1
B32361A4406J80Z1
B32362A2257J50Z1
B32361A2506J50Z1
B32361A4106J80Z1
B32361A4256J80Z1
B32361A4606J80Z1
B32361B3506J30Z1
B32362A3107J30Z1
B32362A3157J30Z1
B32362A3407J30Z1
B32362A4706J80Z1
B32362A4806J80Z1
B32361A2207J50Z1
B32361A3706J30Z1
B32362A3307J30Z1
B32362B2507J50Z1
B32362C3107J30Z1