



■ 技术参数 SPECIFICATIONS


- 线数 (Poles): 2~25(34)
- 适用线规 (Applicable wires): 厚度0.3mm扁平电缆
- 适应基板厚度 (Applicable PC board thickness): 0.8~1.6mm
- 温度范围 (Temperature range): -25℃~85℃
- 额定电压 (Voltage rating): 250V.Ac/Dc
- 额定电流 (Current rating): 2.5A
- 接触电阻 (Contact resistance): $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 耐压 (Withstand voltage): 800V.Ac/1min
- 材料 (Material):
壳体 (Housing): 尼龙 (PA66) UL94V-2(0)
端子 (Terminal): 磷青铜 (Phos.bronze Tin/plated)
黄铜 (Brass Tin/plated)

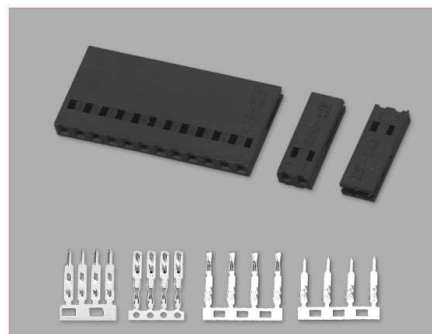


HX25406-PTA (543/5.08-Y)




HX25407-RTA (543/5.08-A)




HX25406-PTB (543/2.54-Y)



HX25407-RTB (543/2.54-A)




HX25406-Y (543)




端子 TERMINAL (543)

型号 Type	数量 Quantity
HX25406-PTA	10000PCS/盘
HX25407-RTA	10000PCS/盘
HX25406-PTB	20000PCS/盘
HX25407-RTB	25000PCS/盘

■ 安装尺寸 MOUNTING MEASUREMENT



■ 适用扁平电缆 PROPER CABLE

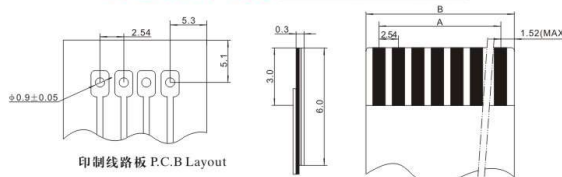

印制线路板 P.C.B Layout

孔座 HOUSING (543)

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	HX25406-2Y	2.54	5.08
3	HX25406-3Y	5.08	7.62
4	HX25406-4Y	7.62	10.16
5	HX25406-5Y	10.16	12.70
6	HX25406-6Y	12.70	15.24
7	HX25406-7Y	15.24	17.78
8	HX25406-8Y	17.78	20.32
9	HX25406-9Y	20.32	22.86
10	HX25406-10Y	22.86	25.40
11	HX25406-11Y	25.40	27.94
12	HX25406-12Y	27.94	30.48
13	HX25406-13Y	30.48	33.02
14	HX25406-14Y	33.02	35.56
15	HX25406-15Y	35.56	38.10
16	HX25406-16Y	38.10	40.64
17	HX25406-17Y	40.64	43.18
18	HX25406-18Y	43.18	45.72
19	HX25406-19Y	45.72	48.26
20	HX25406-20Y	48.26	50.80
21	HX25406-21Y	50.80	53.34
22	HX25406-22Y	53.34	55.88
23	HX25406-23Y	55.88	58.42
24	HX25406-24Y	58.42	60.96
25	HX25406-25Y	60.96	63.50
...	...	...	...
34	HX25406-34Y	83.82	86.36