

Pitch: 2.54*2.54mm (0.1"*0.1")
 Female Header Dual Row S.M.T Type




YZCONN®
 604AD2XX Series

Specifications

Current Rating: 3.0 A
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C To +105°C

Material:

Contact Material: Phosphor Brass
 Insulator Material: Polyester, UL 94V-0
 Nylon-6T

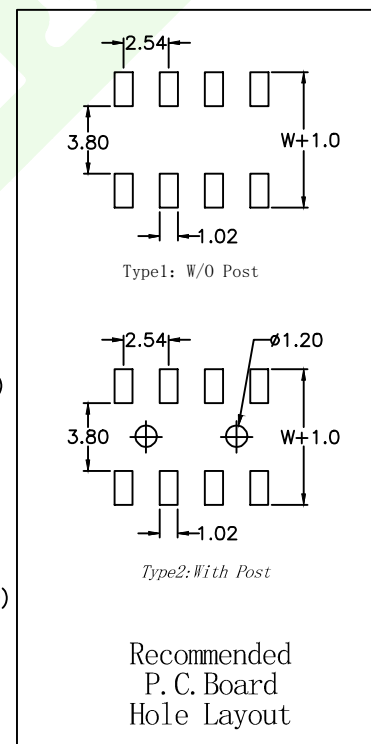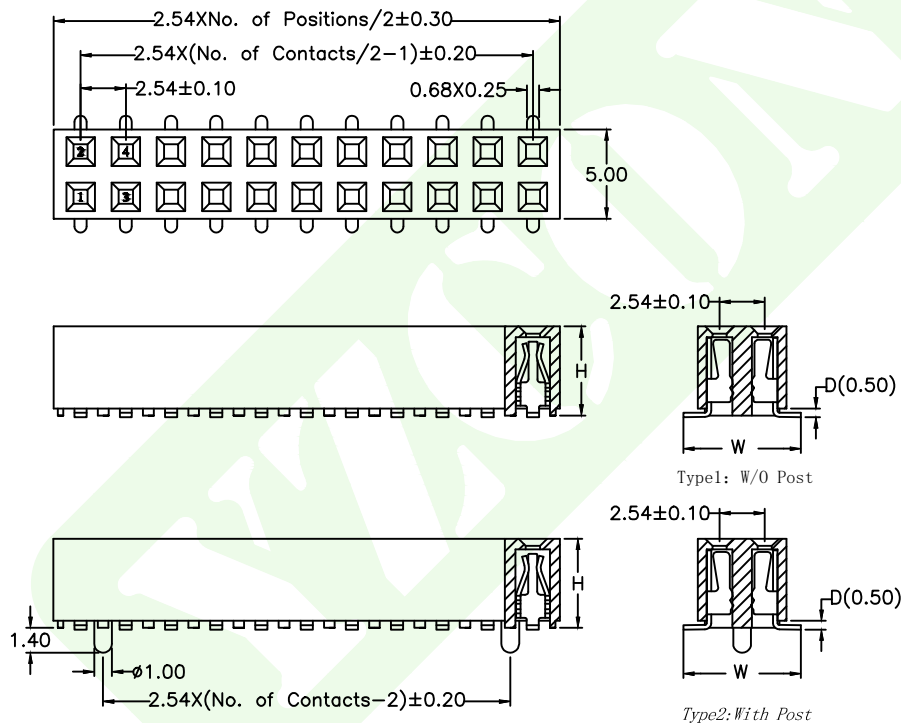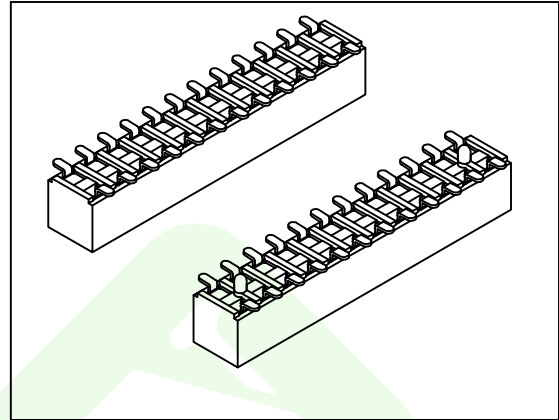

604AD2	XX	XX	XX	X	U	X	XX
Series	No. of Positions	High Option	Plating Option	Insulator Material	Post Type Option	Pin Length(W)	
A Pitch 2.54mm	04 to 80	35 H=3.5mm	01 G/F	0 PA46	1 Type 1	68 W=6.8mm	W: Custom Length Available
D S.M.T Type	06 to 80	50 H=5.0mm	02 Au2u"	1 PA6T	2 Type 2	72 W=7.2mm	
2 Dual Row		71 H=7.1mm	03 Au3u"	2 PA9T			
		85 H=8.5mm	05 Au5u"	3 LCP			
			10 Au10u"				
			15 Au15u"				
						