


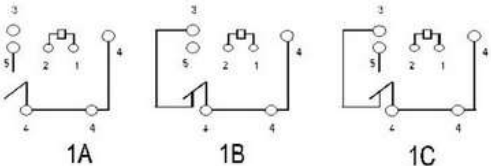

4119

4119

Appearance	4119			
Outline	24×19×20	Dielectric Strength	Between Open Contact	500VAC
Dimension(L×W×H)	26.5×21×22.3		Between Coil and Contact	750VAC
Contact Form	1A,1B,1C	Life	Electrical	1X10 ⁵
Contact Resistance	100 mΩ		Mechanical	1X10 ⁷
Coil Voltage	5VDC ~ 24VDC	Temperature Range		-55~ +85℃
Pick-up Voltage	≤70%	Coil Power(W)		1.6
Release Voltage	≥10%	Mounting Form		PCB Terminal
Contact transfer Current(A)	40A	Weight		21/19g
Contact Rating	30A/40A 14VDC 20A 120VAC/28VDC	Safty Approval		
Insulation Resistance	100 MΩ			
Terminal Layout				
Mounting Holes(mm)	