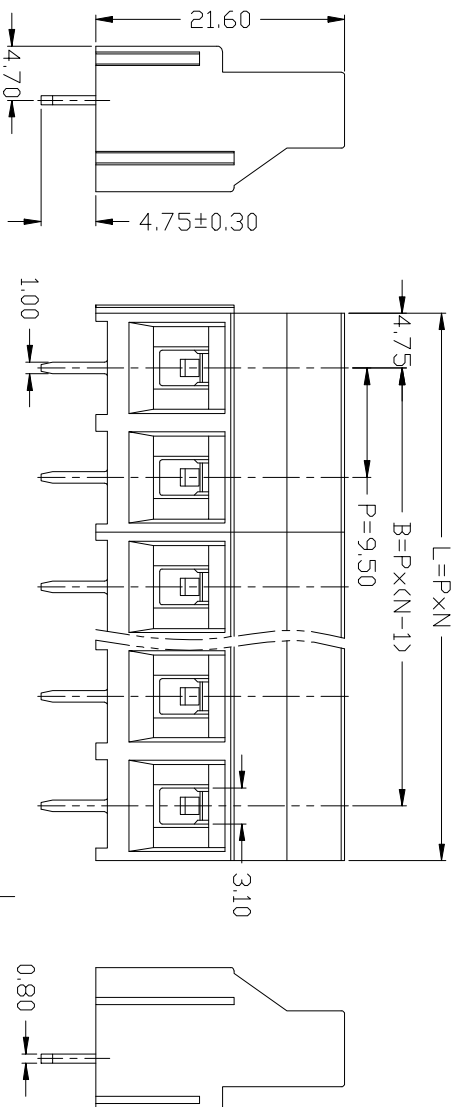
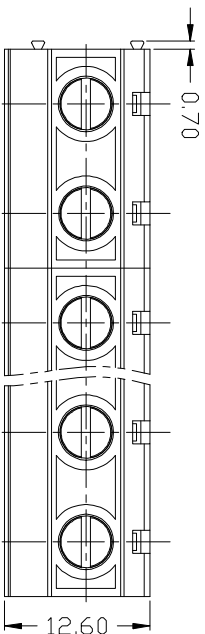


PCB LAYOUT

P=9.50mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 02P~XXP													
N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P	
L	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	
B	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	...	
L	133.00	142.50	152.00	161.50	171.00	180.50	190.00	199.50	209.00	218.50	228.00		
B	123.50	133.00	142.50	152.00	161.50	171.00	180.50	190.00	199.50	209.00	218.50		

版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

技术参数 (Technical Data)		
项 目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/30A	1000V/32A
压线范围 (Wire Range)	26~10AWG	4.0mm ²
工频耐压 (Frequency Voltage)	AC 2500V	
冲击耐压 (Rated Surge Voltage)	6000V	
绝缘阻抗 (Insulation Resistance)	DO500V 5000Ω above	
接触电阻 (Contact Resistance)	≤20mΩ	
剥线长度 (Stripping Length)	8mm	
工作温度 (Temperature)	-40℃~+105℃	
材质和电镀 (Material and plating)		
绝缘材质 (Insulating)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plated)	
焊丝 (Solder)	锡, 镀锌 (Steel, Zn plated)	
方盒 (Gage)	铜合金, 镀锡 (Copper alloy, Ni plated)	

产品命名编码:
(Product Number Code):

RL950-9.5-XXP-1Y-00A (H)

产品型号 (Series No.)

客户需求
(Customer Request)

极数 (No. of poles)

壳体颜色 (Housing Color)

1: 单倍间距
(Single Pitch)

1: 灰色 (Grey)
2: 蓝色 (Blue)
3: 黑色 (Black)
4: 绿色 (Green)
5: 橙色 (Orange)
6: 红色 (Red)
7: 透明色 (Transparent)
8: 黄色 (Yellow)
9: 白色 (White)
Y: 多种颜色 (Mixed Color)

1: 灰色 (Grey)
2: 蓝色 (Blue)
3: 黑色 (Black)
4: 绿色 (Green)
5: 橙色 (Orange)
6: 红色 (Red)
7: 透明色 (Transparent)
8: 黄色 (Yellow)
9: 白色 (White)
Y: 多种颜色 (Mixed Color)

宁波雷欧电气有限公司
NINGBO REL ELECTRIC CO., LTD

型号 (Type): RL950-9.5-XXP-1Y-00A (H)

批准 (Approval):

公差范围 (Tolerance Range)

审核 (Audit):

角度 (Angle)

设计 (Design):

比例 (Scale): FULL

版次 (Version): 10