



Mini-Circuits

ULTRA-FLAT GAIN, LOW NOISE


Monolithic Amplifier

PGA-105+

50Ω 0.04 to 2.6 GHz

THE BIG DEAL

- Excellent Gain Flatness, ± 0.25 dB over 0.1-2.0 GHz
- Gain, 15.2 dB Typ. at 2 GHz
- High IP3, +39.3 dBm Typ. at 0.9 GHz
- P1dB +19.3 dBm Typ. at 2 GHz
- Low Noise Figure, 1.9 dB at 2 GHz
- No External Matching Components Required



Generic photo used for illustration purposes only

CASE STYLE: DF782

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Base Station Infrastructure
- Portable Wireless
- CATV & DBS
- MMDS & Wireless LAN
- LTE

PRODUCT OVERVIEW

PGA-105+ (RoHS compliant) is an advanced ultra flat gain amplifier fabricated using E-pHEMT technology and offers extremely high dynamic range over a broad frequency range and with low noise figure. In addition, the PGA-105+ has good input and output return loss over a broad frequency range without the need for external matching components. It is enclosed in a SOT-89 package for good thermal performance.

KEY FEATURES

Feature	Advantages
Broad Band: 0.04 to 2.6 GHz	Broadband covering primary wireless communications bands: Cellular, PCS, LTE, WiMAX
Ultra Flat Gain: ± 0.25 dB Typ. 0.1 to 2 GHz	Ideal for use in broad band or multi band applications where gain flatness is critical.
High IP3 Versus DC Power Consumption: +39 dBm Typical at 0.9 GHz +35 dBm Typical at 2 GHz	The PGA-105+ provides good IP3 performance relative to device size and power consumption. The combination of the design and E-pHEMT Structure provides enhanced linearity over a broad frequency range as evidenced in the IP3 being typically 15 dB above the P1dB point. This feature makes this amplifier ideal for use in: • Driver amplifiers for complex waveform up converter paths • Drivers in linearized transmit systems • Secondary amplifiers in ultra High Dynamic range receivers
No External Matching Components Required	Unlike competing products, Mini-Circuits PGA-105+ provides outstanding gain flatness and Input and Output Return Loss of 20 dB up to 2.6 GHz without the need for any external matching components.
Low Noise Figure: 1.7-2.0 dB Typ.	A unique feature of the PGA-105+ which separates this design from all competitors is the low noise figure performance in combination with the high dynamic range.

Mini-Circuits



ULTRA-FLAT GAIN, LOW NOISE

Monolithic Amplifier

PGA-105+

Mini-Circuits

50Ω 0.04 to 2.6 GHz

ELECTRICAL SPECIFICATIONS¹ AT +25°C, 50Ω AND +5 V, UNLESS NOTED OTHERWISE

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.04		2.6	GHz
Gain	0.04	13.8	16.4	16.8	dB
	0.5		15.2		
	0.9		15.1		
	2.0		15.2		
	2.6		15.9		
Gain Flatness	0.1 - 2.0		±0.25		dB
Noise Figure	0.04		1.7	2.7	dB
	0.5		2.0		
	0.9		1.9		
	2.0		1.9		
	2.6		2.1		
Input Return Loss	0.04		11.6		dB
	0.5		20.4		
	0.9		18.4		
	2.0		18.9		
	2.6		9.3		
Output Return Loss	0.04		12.9		dB
	0.5		23.3		
	0.9		20.1		
	2.0		14.7		
	2.6		9.1		
Reverse Isolation	2.0		22.2		dB
Output Power @ 1 dB compression	0.04		+20.9		dBm
	0.5		+20.7		
	0.9		+20.5		
	2.0		+19.3		
	2.6		+19.3		
Output IP3	0.04		+36.1		dBm
	0.5		+39.3		
	0.9		+39.3		
	2.0		+34.7		
	2.6		+32.4		
Device Operating Voltage		+4.8	+5.0	+5.2	V
Device Operating Current			63	77	mA
Device Current Variation vs. Temperature ²			67		μA/°C
Device Current Variation vs. Voltage			0.0154		mA/mV
Thermal Resistance, Junction-to-Ground Lead			102		°C/W

1. Measured on Mini-Circuits Characterization test board TB-665+. See Characterization Test Circuit (Fig. 1).

2. (Current at +85°C - Current at -45°C)/130

TYPICAL PERFORMANCE WITH APPLICATION CIRCUITS (SEE APPLICATION NOTE, AN-60-063)

Freq. (GHz)	TB-678-105+								TB-733-105+ (unconditionally stable)							
	Gain	Noise Figure	Input Return Loss	Output Return Loss	Output Power @ 1 dB Comp.	Output IP3	Stability Factor	Stability Measure	Gain	Noise Figure	Input Return Loss	Output Return Loss	Output Power @ 1 dB Comp.	Output IP3	Stability Factor	Stability Measure
0.04	16.4	1.7	11.6	12.9	+20.9	+36.1	0.93	0.59	14.4	2.3	8.6	27.6	+19.5	+34.6	1.14	0.90
0.5	15.2	2.0	20.4	23.3	+20.7	+39.3	1.10	0.62	14.5	2.0	21.8	22.7	+21.0	+38.7	1.13	0.65
0.9	15.1	1.9	18.4	20.1	+20.5	+39.3	1.13	0.66	14.4	1.9	20.6	25.1	+21.0	+37.4	1.17	0.70
2	15.2	1.9	18.9	14.7	+19.3	+34.7	1.29	0.80	15.5	1.9	13.8	15.2	+18.9	+33.6	1.35	0.88
2.6	15.9	2.1	9.3	9.1	+19.3	+32.4	1.51	0.96	15.1	2.0	10.5	8.5	+19.4	+33.2	1.83	0.94




ABSOLUTE MAXIMUM RATINGS³



Parameter	Ratings
Operating Temperature (Ground Lead)	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Operating Current at +5.0 V	94 mA
Power Dissipation	0.47 W
Input Power (CW)	+23 dBm (5 minutes max), +17 dBm (continuous)
DC Voltage on Pin 3	+5.5 V

3. Permanent damage may occur if any of these limits are exceeded.
Electrical maximum ratings are not intended for continuous normal operation.

DC CURRENT HISTOGRAM

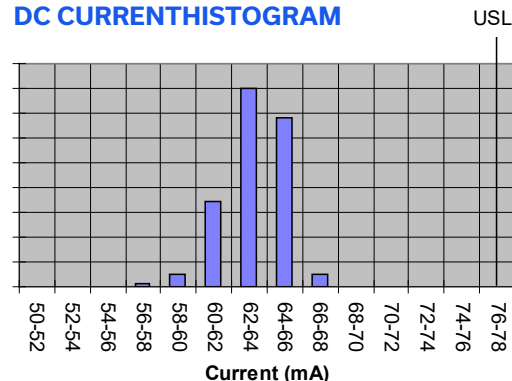

SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION

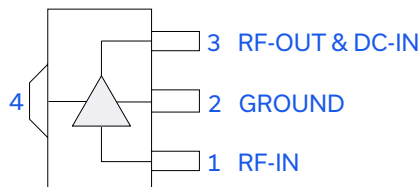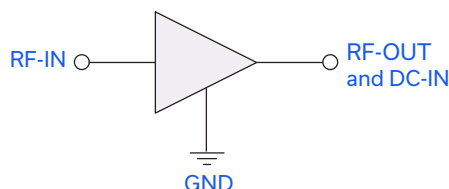

Function	Pin Number	Description
RF-IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit", Fig. 2.
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.



Mini-Circuits

ULTRA-FLAT GAIN, LOW NOISE

Monolithic Amplifier

PGA-105+

50Ω 0.04 to 2.6 GHz

CHARACTERIZATION TEST CIRCUIT


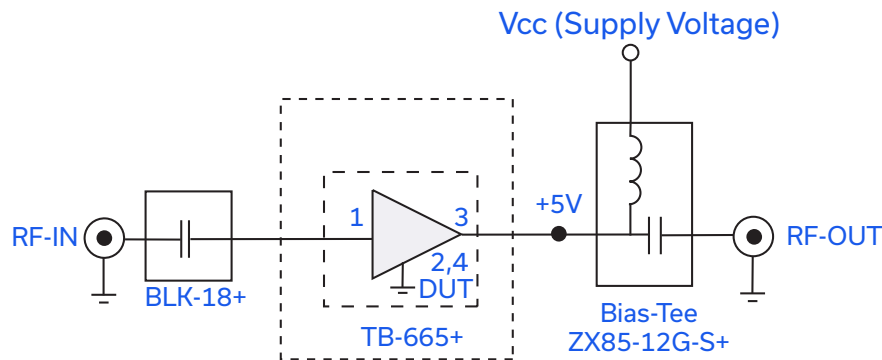


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT tested on Mini-Circuits Characterization test board TB-665+) Gain, Return Loss, Output Power at 1 dB Compression (P1dB), Output IP3 (OIP3) and Noise Figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:


1. Gain and Return loss: $P_{IN} = -25$ dBm
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.

RECOMMENDED APPLICATION CIRCUITS

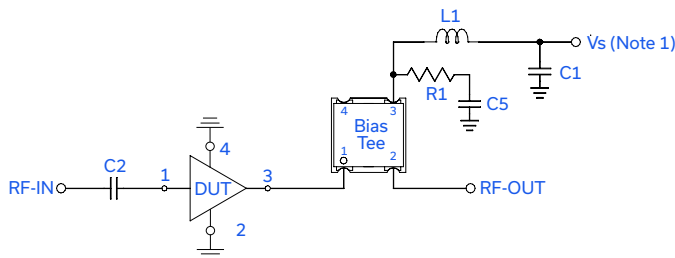

COMPONENT	VALUE	SIZE	PART NUMBER	MANUFACTURER
DUT		SOT-89	PGA-105+	Mini-Circuits
C1, C5	0.1 uF	0805	08055C104JAT2A	AVX
C2	0.001 uF	0402	GRM1555C1H102JA01D	AVX
R1	33.2 Ohm	0805	RK73H2ATTD33R2F	KOA Speer Electronics
L1	43 nH	0805	0805CS-430XGLC	Coilcraft, Inc
BIAS TEE			TCBT-14+	Mini-Circuits


Fig 2. Evaluation board TB-678-105+ includes case, connectors, and components soldered to PCB

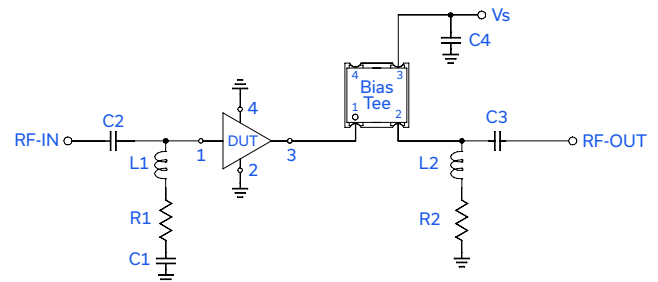

COMPONENT	VALUE	SIZE	PART NUMBER	MANUFACTURER
DUT		SOT-89	PGA-105+	Mini-Circuits
C1	4700 pF	0402	GRM155R71H472JA01D	Murata Electronics N.A.
C2, C3	2200 pF	0402	GRM155R71H222JA01D	Murata Electronics N.A.
C4	0.1 uF	0805	08055C104JAT2A	AVX
R1	14 Ohm	0402	RK73H1ETTP14R0F	KOA Speer Electronics
R2	49.9 Ohm	0402	RK73H1ETTP49R9F	KOA Speer Electronics
L1	390 nH	0805	0805CS-391XGLC	Coilcraft, Inc
L2	330 nH	0806	0805CS-331XGLC	Coilcraft, Inc
BIAS TEE			TCBT-14+	Mini-Circuits

Fig 3. Evaluation board TB-733-105+ with unconditional stability (see applications note AN-60-063)

PRODUCT MARKING



Marking may contain other features or characters for internal lot control.

Mini-Circuits



ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASHBOARD.

[CLICK HERE](#)

Performance Data	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DF782 (SOT 89) Plastic package, exposed paddle lead finish: Matte-Tin
Tape & Reel Standard Quantities Available on Reel	F55 7" Reels with 20, 50, 100, 200, 500 or 1K devices
Suggested Layout for PCB Design	PL-370
Evaluation Board	TB-678-105+ TB-733-105+ (See application note: AN-60-063)
Environmental Ratings	ENV08T1


ESD RATING

Human Body Model (HBM): Class 1A (250 to <500 V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1(pass 25 V) in accordance with ANSI/ESD STM5.2-1999

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

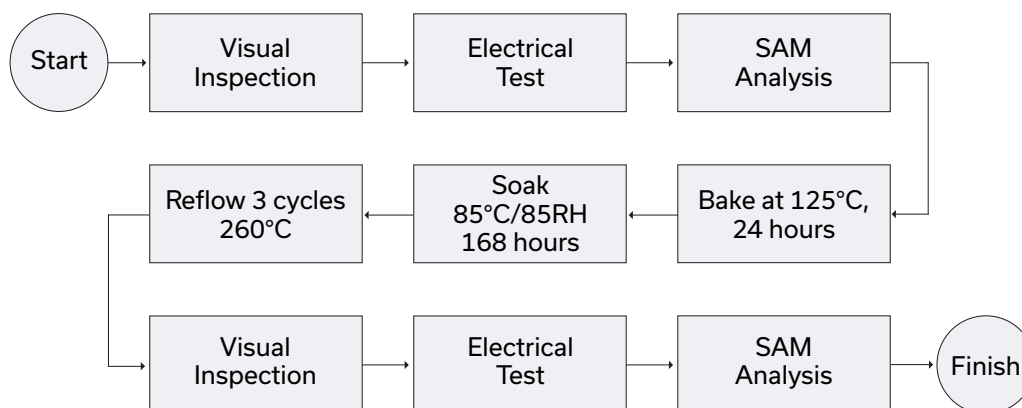MSL TEST FLOW CHART**NOTES**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 68.97 mA @ Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
20.0	18.31	20.45	6.67	7.96	0.69	0.60	38.09	21.11	1.67
30.0	17.09	19.71	9.50	10.85	0.84	0.59	39.13	21.33	1.80
40.0	16.48	19.49	11.62	13.05	0.93	0.59	37.56	20.97	1.70
50.0	16.14	19.43	13.19	14.71	0.98	0.60	37.08	20.91	1.70
60.0	15.89	19.24	14.59	16.30	1.01	0.59	38.85	21.12	1.65
70.0	15.76	19.29	15.79	17.54	1.03	0.59	39.79	21.12	1.66
80.0	15.66	19.22	16.78	18.66	1.04	0.59	39.02	20.96	1.79
90.0	15.60	19.22	17.52	19.61	1.05	0.59	40.45	20.95	1.74
100.0	15.55	19.20	18.20	20.42	1.06	0.59	39.70	20.93	1.74
150.0	15.43	19.20	20.31	23.45	1.08	0.59	41.15	20.90	1.80
200.0	15.37	19.20	21.14	25.15	1.09	0.60	41.01	20.62	1.73
250.0	15.34	19.22	21.50	25.79	1.09	0.60	42.38	20.75	1.88
300.0	15.32	19.22	21.51	26.44	1.09	0.60	41.91	20.72	1.90
350.0	15.30	19.25	21.28	26.17	1.10	0.60	40.68	20.87	1.94
400.0	15.29	19.28	20.94	26.09	1.10	0.61	41.63	20.91	1.90
450.0	15.27	19.31	20.70	25.63	1.10	0.61	43.87	20.87	1.95
500.0	15.25	19.35	20.38	25.22	1.10	0.62	40.25	20.82	1.95
600.0	15.23	19.46	19.61	24.20	1.11	0.63	40.64	20.83	2.01
700.0	15.20	19.53	19.08	23.29	1.12	0.64	42.76	20.89	1.99
800.0	15.17	19.65	18.68	22.38	1.12	0.65	41.11	20.86	1.87
900.0	15.14	19.79	18.41	21.55	1.13	0.66	39.29	20.52	1.93
1000.0	15.11	19.94	18.38	20.76	1.15	0.67	38.02	20.56	1.89
1050.0	15.10	20.01	18.40	20.47	1.15	0.67	38.00	20.54	1.92
1100.0	15.10	20.09	18.49	20.08	1.16	0.68	38.43	20.55	1.97
1200.0	15.08	20.28	18.87	19.57	1.17	0.69	39.06	20.57	1.96
1300.0	15.07	20.45	19.59	19.00	1.18	0.70	38.33	20.28	1.92
1400.0	15.06	20.67	20.60	18.44	1.20	0.71	36.88	20.13	1.93
1500.0	15.07	20.90	22.04	18.03	1.22	0.72	36.55	20.14	1.91
1600.0	15.09	21.13	24.19	17.60	1.23	0.73	37.49	20.23	1.94
1700.0	15.11	21.41	26.07	17.13	1.25	0.75	36.10	19.86	1.83
1800.0	15.15	21.69	25.61	16.71	1.27	0.76	35.85	19.82	1.88
1900.0	15.20	22.05	22.55	16.21	1.29	0.78	35.24	19.46	1.89
2000.0	15.29	22.39	19.29	15.63	1.29	0.80	34.84	19.42	1.89
2100.0	15.37	22.85	16.59	14.94	1.31	0.83	34.41	19.46	1.85
2200.0	15.47	23.44	14.44	14.10	1.32	0.86	34.15	19.53	1.92
2300.0	15.59	24.11	12.76	13.15	1.34	0.90	33.56	19.34	1.86
2400.0	15.73	24.91	11.48	12.05	1.36	0.93	33.47	19.39	1.89
2500.0	15.90	25.93	10.55	10.84	1.41	0.95	33.14	19.18	1.84
2600.0	16.05	27.35	10.14	9.61	1.51	0.96	32.48	19.41	2.00
2700.0	16.21	29.04	10.15	8.32	1.68	0.94	32.78	19.56	2.06
2800.0	16.31	31.25	10.79	7.10	2.03	0.89	32.31	19.74	2.08
2900.0	16.31	33.15	12.13	5.98	2.42	0.80	32.44	20.07	2.11
3000.0	16.17	33.54	13.98	5.02	2.50	0.69	32.31	20.28	2.17

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 64.86 mA @ Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
20.0	18.28	20.34	6.62	7.94	0.69	0.59	37.52	20.68	1.62
30.0	17.06	19.76	9.47	10.83	0.84	0.60	40.24	20.94	1.69
40.0	16.44	19.50	11.58	13.02	0.93	0.60	36.32	20.62	1.66
50.0	16.10	19.23	13.18	14.72	0.97	0.58	36.92	20.55	1.68
60.0	15.84	19.18	14.55	16.26	1.00	0.58	37.65	20.75	1.66
70.0	15.71	19.25	15.75	17.47	1.03	0.59	38.30	20.75	1.65
80.0	15.61	19.20	16.75	18.57	1.04	0.59	37.44	20.60	1.73
90.0	15.55	19.17	17.50	19.49	1.05	0.59	40.20	20.58	1.72
100.0	15.50	19.17	18.16	20.32	1.06	0.59	40.85	20.55	1.74
150.0	15.38	19.16	20.29	23.24	1.08	0.59	38.60	20.54	1.81
200.0	15.32	19.13	21.20	24.94	1.09	0.59	38.42	20.28	1.71
250.0	15.29	19.18	21.53	25.55	1.09	0.60	40.57	20.38	1.85
300.0	15.27	19.21	21.51	26.12	1.09	0.60	41.36	20.38	1.91
350.0	15.25	19.23	21.30	25.93	1.10	0.61	39.68	20.48	1.91
400.0	15.24	19.24	20.99	25.87	1.10	0.61	40.48	20.53	1.89
450.0	15.22	19.26	20.75	25.47	1.10	0.61	44.34	20.48	1.95
500.0	15.20	19.29	20.41	25.09	1.10	0.61	40.88	20.45	1.87
600.0	15.18	19.40	19.65	24.11	1.11	0.63	41.05	20.44	1.99
700.0	15.15	19.49	19.12	23.29	1.12	0.64	39.60	20.52	1.96
800.0	15.12	19.62	18.71	22.40	1.12	0.65	41.62	20.47	1.82
900.0	15.10	19.74	18.46	21.58	1.13	0.66	38.85	20.17	1.88
1000.0	15.06	19.89	18.43	20.81	1.14	0.67	36.85	20.19	1.88
1050.0	15.05	19.96	18.44	20.55	1.15	0.67	36.91	20.15	1.91
1100.0	15.05	20.04	18.55	20.20	1.16	0.68	37.59	20.20	1.97
1200.0	15.03	20.24	18.92	19.67	1.17	0.69	38.01	20.21	2.00
1300.0	15.03	20.40	19.64	19.13	1.18	0.70	37.51	19.92	1.90
1400.0	15.02	20.62	20.62	18.58	1.20	0.71	36.46	19.74	1.93
1500.0	15.03	20.83	22.09	18.20	1.22	0.72	35.76	19.72	1.89
1600.0	15.05	21.10	24.15	17.79	1.24	0.74	36.63	19.82	1.88
1700.0	15.08	21.36	26.02	17.35	1.25	0.75	35.54	19.45	1.86
1800.0	15.12	21.66	25.42	16.93	1.27	0.76	35.58	19.41	1.85
1900.0	15.17	22.00	22.43	16.43	1.28	0.78	34.82	19.06	1.89
2000.0	15.25	22.40	19.24	15.89	1.30	0.81	34.52	19.01	1.86
2100.0	15.34	22.80	16.54	15.20	1.31	0.83	33.82	19.08	1.83
2200.0	15.45	23.39	14.40	14.35	1.32	0.86	34.19	19.12	1.90
2300.0	15.56	24.11	12.75	13.43	1.35	0.90	33.72	18.93	1.85
2400.0	15.71	24.92	11.48	12.33	1.38	0.93	33.12	19.03	1.89
2500.0	15.88	25.97	10.56	11.09	1.42	0.95	32.69	18.82	1.80
2600.0	16.03	27.46	10.15	9.85	1.55	0.96	32.63	19.03	1.98
2700.0	16.19	29.33	10.17	8.54	1.76	0.94	32.59	19.19	2.02
2800.0	16.29	31.68	10.82	7.30	2.16	0.89	32.39	19.36	2.05
2900.0	16.29	33.88	12.17	6.15	2.67	0.81	32.42	19.71	2.05
3000.0	16.15	34.03	14.03	5.19	2.69	0.71	32.40	19.89	2.10

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 73.09 mA @ Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
20.0	18.33	20.45	6.70	8.00	0.70	0.59	41.09	21.50	1.72
30.0	17.12	19.80	9.54	10.89	0.85	0.59	38.21	21.66	1.83
40.0	16.51	19.52	11.64	13.10	0.93	0.59	37.55	21.28	1.75
50.0	16.17	19.50	13.24	14.77	0.98	0.60	36.69	21.21	1.73
60.0	15.93	19.33	14.68	16.35	1.01	0.59	38.30	21.45	1.69
70.0	15.80	19.32	15.81	17.64	1.03	0.59	38.75	21.44	1.69
80.0	15.70	19.29	16.79	18.72	1.04	0.59	38.34	21.27	1.81
90.0	15.64	19.28	17.56	19.69	1.05	0.59	40.35	21.26	1.77
100.0	15.59	19.23	18.18	20.52	1.06	0.59	41.88	21.24	1.78
150.0	15.47	19.22	20.31	23.60	1.08	0.59	40.37	21.20	1.79
200.0	15.42	19.23	21.14	25.39	1.09	0.59	42.08	20.94	1.74
250.0	15.39	19.25	21.47	26.10	1.09	0.60	42.54	21.05	1.86
300.0	15.37	19.27	21.42	26.68	1.09	0.60	42.43	21.03	1.90
350.0	15.35	19.27	21.24	26.37	1.09	0.60	42.88	21.15	1.95
400.0	15.33	19.33	20.92	26.25	1.10	0.61	40.27	21.23	1.93
450.0	15.32	19.35	20.65	25.94	1.10	0.61	41.90	21.17	1.93
500.0	15.30	19.40	20.29	25.37	1.10	0.62	41.62	21.14	1.93
600.0	15.27	19.47	19.55	24.31	1.11	0.62	43.07	21.14	2.01
700.0	15.24	19.56	19.03	23.32	1.12	0.63	42.25	21.21	2.03
800.0	15.21	19.68	18.60	22.41	1.12	0.64	42.79	21.17	1.91
900.0	15.18	19.82	18.37	21.57	1.13	0.66	40.14	20.84	1.61
1000.0	15.15	19.98	18.31	20.72	1.15	0.67	39.29	20.87	1.93
1050.0	15.14	20.06	18.35	20.44	1.15	0.68	38.97	20.84	1.94
1100.0	15.13	20.14	18.43	20.08	1.16	0.68	40.90	20.85	1.98
1200.0	15.12	20.33	18.80	19.51	1.17	0.69	39.94	20.86	1.97
1300.0	15.10	20.51	19.52	18.92	1.19	0.70	38.56	20.58	1.95
1400.0	15.10	20.72	20.50	18.37	1.20	0.71	37.66	20.43	1.98
1500.0	15.10	20.94	21.95	17.93	1.22	0.72	37.63	20.43	1.92
1600.0	15.12	21.18	24.13	17.49	1.24	0.73	38.27	20.57	1.88
1700.0	15.14	21.42	26.15	17.02	1.25	0.75	36.76	20.20	1.86
1800.0	15.18	21.76	25.77	16.57	1.27	0.76	37.29	20.15	1.89
1900.0	15.23	22.06	22.66	16.04	1.28	0.78	36.16	19.79	1.94
2000.0	15.31	22.42	19.37	15.48	1.29	0.80	35.46	19.73	1.89
2100.0	15.39	22.89	16.61	14.76	1.31	0.83	35.43	19.79	1.86
2200.0	15.49	23.42	14.45	13.90	1.32	0.86	34.60	19.84	1.96
2300.0	15.60	24.10	12.78	12.99	1.34	0.89	34.43	19.64	1.90
2400.0	15.75	24.93	11.49	11.87	1.36	0.93	33.55	19.71	1.94
2500.0	15.91	25.84	10.55	10.68	1.39	0.95	33.60	19.51	1.85
2600.0	16.06	27.20	10.14	9.45	1.48	0.95	33.09	19.71	2.03
2700.0	16.22	28.93	10.14	8.17	1.65	0.93	33.18	19.86	2.06
2800.0	16.32	31.05	10.79	6.96	1.96	0.88	32.64	20.05	2.07
2900.0	16.32	32.84	12.13	5.85	2.31	0.79	32.91	20.37	2.15
3000.0	16.17	33.13	13.96	4.91	2.36	0.68	32.52	20.56	2.17

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 62.96 mA @ Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
20.0	18.31	20.06	6.27	7.37	0.63	0.60	35.66	21.08	1.24
30.0	16.91	19.33	9.03	10.01	0.80	0.60	35.79	21.36	1.30
40.0	16.15	19.01	11.11	11.99	0.89	0.59	37.30	20.90	1.38
50.0	15.72	18.93	12.71	13.40	0.95	0.60	36.76	20.89	1.37
60.0	15.40	18.69	14.14	14.72	0.99	0.58	38.96	21.14	1.35
70.0	15.22	18.74	15.26	15.69	1.02	0.59	39.70	21.14	1.35
80.0	15.10	18.71	16.26	16.53	1.03	0.59	40.53	20.97	1.51
90.0	15.01	18.68	17.09	17.26	1.05	0.59	39.17	20.96	1.48
100.0	14.95	18.65	17.78	17.88	1.05	0.59	43.65	20.94	1.48
150.0	14.80	18.60	20.36	20.00	1.08	0.59	46.46	20.90	1.50
200.0	14.74	18.61	21.79	20.75	1.09	0.59	44.58	20.63	1.48
250.0	14.70	18.64	22.32	20.33	1.09	0.59	44.02	20.82	1.59
300.0	14.69	18.63	22.40	19.91	1.10	0.59	45.02	20.77	1.66
350.0	14.67	18.68	21.92	19.26	1.10	0.59	45.04	20.97	1.66
400.0	14.67	18.69	21.76	19.08	1.10	0.59	41.69	21.01	1.63
450.0	14.66	18.75	21.59	18.95	1.10	0.60	41.47	20.99	1.66
500.0	14.66	18.75	21.37	18.83	1.10	0.60	48.08	20.93	1.64
600.0	14.67	18.86	20.99	18.49	1.11	0.60	45.01	20.92	1.75
700.0	14.68	18.96	21.08	18.19	1.11	0.61	39.97	21.03	1.71
800.0	14.70	19.06	21.13	17.86	1.12	0.61	41.68	21.00	1.56
900.0	14.72	19.18	21.08	17.33	1.12	0.62	39.77	20.62	1.62
1000.0	14.74	19.34	21.40	16.76	1.13	0.63	38.01	20.70	1.60
1050.0	14.75	19.42	21.60	16.51	1.13	0.63	38.96	20.70	1.61
1100.0	14.78	19.47	21.92	16.17	1.13	0.63	38.99	20.73	1.66
1200.0	14.81	19.64	22.67	15.58	1.14	0.64	39.08	20.76	1.67
1300.0	14.87	19.85	24.07	15.11	1.15	0.64	37.96	20.45	1.58
1400.0	14.92	20.02	26.26	14.70	1.15	0.65	37.58	20.26	1.60
1500.0	15.00	20.24	30.53	14.33	1.16	0.66	36.65	20.29	1.57
1600.0	15.09	20.50	45.26	14.03	1.16	0.67	37.35	20.44	1.57
1700.0	15.20	20.72	30.89	13.78	1.16	0.68	35.77	19.99	1.43
1800.0	15.31	21.05	24.22	13.39	1.17	0.70	35.89	19.92	1.48
1900.0	15.44	21.35	20.11	12.97	1.16	0.72	34.91	19.51	1.50
2000.0	15.61	21.70	17.03	12.60	1.15	0.75	35.03	19.48	1.45
2100.0	15.77	22.13	14.60	12.17	1.14	0.78	34.23	19.54	1.40
2200.0	15.95	22.66	12.71	11.63	1.12	0.82	34.48	19.63	1.51
2300.0	16.14	23.27	11.17	11.06	1.11	0.87	34.19	19.42	1.39
2400.0	16.35	24.05	9.98	10.30	1.10	0.91	33.76	19.48	1.47
2500.0	16.56	25.00	9.10	9.41	1.10	0.94	33.82	19.31	1.36
2600.0	16.76	26.22	8.68	8.44	1.13	0.95	33.06	19.52	1.55
2700.0	16.95	27.74	8.65	7.36	1.21	0.94	33.54	19.74	1.61
2800.0	17.08	29.64	9.20	6.28	1.38	0.88	33.16	19.96	1.60
2900.0	17.12	31.70	10.40	5.23	1.66	0.78	33.41	20.35	1.62
3000.0	17.01	32.67	12.26	4.32	1.83	0.66	33.47	20.65	1.66

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 60.52 mA @ Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
20.0	18.29	19.99	6.28	7.40	0.64	0.59	39.99	20.67	1.24
30.0	16.90	19.31	9.05	10.04	0.80	0.59	36.67	20.96	1.38
40.0	16.15	19.02	11.13	12.02	0.89	0.59	37.12	20.50	1.35
50.0	15.72	18.78	12.78	13.50	0.95	0.58	36.14	20.48	1.37
60.0	15.41	18.67	14.08	14.83	0.98	0.58	38.87	20.72	1.34
70.0	15.24	18.76	15.30	15.79	1.02	0.59	39.10	20.72	1.33
80.0	15.11	18.71	16.30	16.69	1.03	0.59	40.80	20.56	1.50
90.0	15.03	18.69	17.14	17.41	1.05	0.59	41.68	20.55	1.44
100.0	14.97	18.67	17.87	18.09	1.06	0.59	42.14	20.53	1.46
150.0	14.82	18.61	20.48	20.26	1.08	0.59	42.78	20.51	1.46
200.0	14.76	18.62	21.87	21.06	1.09	0.59	43.02	20.21	1.47
250.0	14.73	18.62	22.47	20.74	1.09	0.59	43.55	20.38	1.59
300.0	14.71	18.67	22.53	20.22	1.10	0.59	44.29	20.37	1.64
350.0	14.68	18.67	22.13	19.58	1.10	0.59	45.32	20.54	1.65
400.0	14.69	18.72	21.94	19.39	1.10	0.59	44.01	20.59	1.63
450.0	14.68	18.76	21.71	19.22	1.10	0.60	47.51	20.56	1.67
500.0	14.68	18.77	21.45	19.12	1.10	0.60	50.38	20.53	1.66
600.0	14.69	18.84	21.07	18.80	1.11	0.60	44.37	20.50	1.73
700.0	14.69	18.95	21.06	18.48	1.11	0.61	41.59	20.62	1.71
800.0	14.71	19.04	21.10	18.12	1.12	0.61	41.54	20.55	1.57
900.0	14.73	19.19	20.99	17.59	1.12	0.62	39.87	20.23	1.63
1000.0	14.74	19.35	21.27	17.02	1.13	0.63	37.83	20.28	1.60
1050.0	14.76	19.41	21.50	16.75	1.13	0.63	37.47	20.28	1.60
1100.0	14.78	19.50	21.77	16.41	1.14	0.63	38.44	20.33	1.65
1200.0	14.81	19.66	22.54	15.81	1.14	0.64	38.09	20.37	1.65
1300.0	14.86	19.84	23.84	15.34	1.15	0.65	37.38	20.07	1.58
1400.0	14.91	20.05	25.90	14.92	1.16	0.65	36.87	19.87	1.62
1500.0	14.99	20.28	29.84	14.54	1.16	0.66	36.15	19.88	1.56
1600.0	15.08	20.49	39.96	14.26	1.17	0.67	37.00	20.02	1.56
1700.0	15.18	20.75	31.30	13.99	1.17	0.69	35.12	19.58	1.47
1800.0	15.29	21.04	24.54	13.61	1.17	0.71	35.48	19.52	1.44
1900.0	15.41	21.36	20.33	13.18	1.17	0.73	34.71	19.10	1.50
2000.0	15.57	21.73	17.20	12.82	1.16	0.75	35.02	19.07	1.46
2100.0	15.73	22.14	14.75	12.38	1.15	0.79	34.16	19.14	1.38
2200.0	15.91	22.68	12.83	11.84	1.14	0.83	33.95	19.22	1.50
2300.0	16.09	23.31	11.27	11.25	1.13	0.87	34.14	19.02	1.39
2400.0	16.30	24.08	10.07	10.49	1.12	0.91	33.37	19.12	1.46
2500.0	16.51	25.02	9.20	9.59	1.12	0.94	33.48	18.91	1.35
2600.0	16.71	26.25	8.76	8.60	1.16	0.95	33.23	19.12	1.55
2700.0	16.90	27.87	8.72	7.50	1.25	0.94	33.36	19.35	1.56
2800.0	17.03	29.81	9.27	6.40	1.43	0.88	33.14	19.55	1.57
2900.0	17.07	31.88	10.48	5.34	1.72	0.79	33.42	19.95	1.64
3000.0	16.97	32.80	12.35	4.42	1.89	0.67	33.51	20.24	1.67

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 66.71 mA @ Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
20.0	18.35	20.03	6.29	7.39	0.63	0.59	37.97	21.56	1.27
30.0	16.94	19.33	9.06	10.03	0.80	0.59	38.75	21.77	1.41
40.0	16.18	19.00	11.14	11.97	0.89	0.59	39.55	21.33	1.38
50.0	15.75	18.88	12.75	13.39	0.95	0.59	38.07	21.30	1.39
60.0	15.44	18.74	14.16	14.73	0.99	0.58	38.69	21.56	1.35
70.0	15.26	18.74	15.27	15.66	1.01	0.59	40.64	21.56	1.36
80.0	15.13	18.73	16.27	16.52	1.03	0.59	38.29	21.40	1.51
90.0	15.05	18.71	17.08	17.23	1.05	0.59	38.64	21.40	1.50
100.0	14.99	18.71	17.80	17.83	1.06	0.59	44.84	21.38	1.48
150.0	14.84	18.65	20.37	19.88	1.08	0.59	47.05	21.34	1.54
200.0	14.77	18.64	21.74	20.62	1.09	0.59	43.03	21.03	1.47
250.0	14.74	18.66	22.27	20.24	1.09	0.59	42.10	21.22	1.58
300.0	14.73	18.66	22.31	19.80	1.09	0.59	46.74	21.22	1.64
350.0	14.70	18.71	21.88	19.16	1.10	0.59	44.10	21.37	1.68
400.0	14.70	18.75	21.65	18.95	1.10	0.59	40.78	21.45	1.65
450.0	14.70	18.77	21.53	18.78	1.10	0.59	41.69	21.40	1.67
500.0	14.70	18.80	21.30	18.73	1.10	0.60	42.93	21.40	1.67
600.0	14.71	18.87	20.94	18.38	1.11	0.60	45.27	21.37	1.76
700.0	14.72	18.97	21.05	18.10	1.11	0.61	40.63	21.45	1.74
800.0	14.74	19.09	21.09	17.77	1.12	0.61	40.34	21.40	1.59
900.0	14.76	19.23	21.03	17.25	1.12	0.62	40.23	21.07	1.61
1000.0	14.78	19.36	21.36	16.66	1.13	0.63	38.61	21.14	1.68
1050.0	14.79	19.45	21.59	16.42	1.13	0.63	39.43	21.11	1.63
1100.0	14.81	19.51	21.87	16.08	1.13	0.63	40.03	21.17	1.68
1200.0	14.85	19.69	22.61	15.51	1.14	0.64	37.91	21.19	1.68
1300.0	14.90	19.87	24.02	15.05	1.15	0.64	38.26	20.86	1.59
1400.0	14.96	20.07	26.23	14.63	1.15	0.65	37.24	20.68	1.62
1500.0	15.04	20.29	30.50	14.26	1.16	0.66	37.35	20.71	1.57
1600.0	15.13	20.52	47.95	13.97	1.16	0.67	37.70	20.87	1.58
1700.0	15.23	20.77	31.03	13.70	1.16	0.68	35.68	20.43	1.50
1800.0	15.35	21.06	24.24	13.31	1.16	0.70	35.64	20.35	1.47
1900.0	15.48	21.40	20.10	12.88	1.16	0.73	35.29	19.92	1.51
2000.0	15.64	21.71	17.00	12.53	1.15	0.75	35.37	19.90	1.48
2100.0	15.81	22.16	14.59	12.11	1.14	0.78	34.83	19.94	1.47
2200.0	15.99	22.67	12.67	11.55	1.12	0.82	34.45	20.06	1.51
2300.0	16.18	23.27	11.13	10.97	1.10	0.86	34.76	19.82	1.42
2400.0	16.39	24.09	9.95	10.23	1.10	0.91	33.76	19.88	1.48
2500.0	16.60	24.99	9.07	9.34	1.09	0.94	34.21	19.73	1.35
2600.0	16.79	26.22	8.65	8.36	1.12	0.95	33.56	19.92	1.54
2700.0	16.99	27.71	8.61	7.28	1.19	0.93	33.76	20.16	1.59
2800.0	17.12	29.62	9.15	6.21	1.36	0.88	33.55	20.35	1.59
2900.0	17.15	31.58	10.35	5.17	1.61	0.78	33.69	20.76	1.62
3000.0	17.04	32.42	12.18	4.28	1.76	0.65	33.72	21.04	1.66

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 70.46 mA @ Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
20.0	18.22	20.60	6.87	8.27	0.73	0.59	37.67	20.45	2.11
30.0	17.14	20.04	9.63	11.29	0.88	0.59	36.45	20.51	2.09
40.0	16.62	19.82	11.64	13.59	0.95	0.59	36.84	20.12	2.00
50.0	16.35	19.83	13.03	15.35	1.00	0.61	36.42	20.09	2.03
60.0	16.14	19.75	14.34	17.05	1.03	0.61	38.59	20.33	1.97
70.0	16.04	19.66	15.30	18.53	1.04	0.60	37.29	20.38	1.97
80.0	15.96	19.58	16.11	19.83	1.05	0.60	37.00	20.19	2.05
90.0	15.91	19.56	16.67	21.02	1.06	0.60	38.55	20.21	2.01
100.0	15.87	19.59	17.23	22.09	1.07	0.60	38.52	20.20	2.02
150.0	15.77	19.55	18.74	26.41	1.08	0.60	38.24	20.17	2.05
200.0	15.72	19.57	19.14	29.77	1.09	0.60	38.07	19.94	1.96
250.0	15.68	19.54	19.14	32.90	1.09	0.60	38.83	20.03	2.13
300.0	15.66	19.61	18.81	36.82	1.09	0.61	39.27	19.97	2.14
350.0	15.63	19.59	18.42	41.90	1.09	0.61	38.59	20.11	2.24
400.0	15.61	19.64	18.06	53.34	1.10	0.62	39.29	20.15	2.16
450.0	15.58	19.67	17.81	44.49	1.10	0.63	39.57	20.11	2.17
500.0	15.56	19.72	17.52	39.82	1.10	0.63	37.96	20.02	2.22
600.0	15.51	19.79	16.93	34.26	1.11	0.64	39.15	20.05	2.27
700.0	15.45	19.89	16.53	31.68	1.12	0.66	39.39	20.11	2.29
800.0	15.39	20.00	16.16	29.79	1.13	0.67	39.93	20.03	2.16
900.0	15.33	20.12	15.96	27.98	1.14	0.69	37.55	19.69	2.30
1000.0	15.27	20.28	15.98	26.42	1.15	0.70	37.40	19.65	2.19
1050.0	15.24	20.37	16.00	25.92	1.16	0.71	37.35	19.65	2.22
1100.0	15.22	20.44	16.05	25.32	1.17	0.71	37.19	19.68	2.26
1200.0	15.16	20.60	16.35	24.40	1.18	0.73	37.66	19.72	2.30
1300.0	15.11	20.79	16.87	23.38	1.21	0.74	37.54	19.48	2.22
1400.0	15.06	21.00	17.57	22.38	1.23	0.75	36.13	19.35	2.26
1500.0	15.02	21.20	18.56	21.68	1.25	0.76	36.30	19.31	2.22
1600.0	14.99	21.48	20.04	20.93	1.28	0.77	36.30	19.44	2.23
1700.0	14.96	21.71	21.65	20.13	1.30	0.78	35.55	19.12	2.18
1800.0	14.95	22.04	23.13	19.41	1.34	0.80	35.63	19.09	2.22
1900.0	14.95	22.34	23.08	18.65	1.36	0.81	35.33	18.72	2.27
2000.0	14.97	22.75	21.07	17.88	1.39	0.83	34.78	18.62	2.25
2100.0	15.01	23.23	18.44	16.88	1.43	0.85	34.13	18.68	2.21
2200.0	15.05	23.76	16.13	15.77	1.46	0.88	34.03	18.68	2.33
2300.0	15.12	24.40	14.24	14.63	1.49	0.90	33.69	18.50	2.24
2400.0	15.23	25.32	12.76	13.32	1.56	0.93	32.96	18.55	2.31
2500.0	15.35	26.33	11.69	11.89	1.62	0.95	32.64	18.32	2.22
2600.0	15.48	27.86	11.18	10.47	1.79	0.96	32.42	18.51	2.45
2700.0	15.62	29.63	11.19	9.03	2.03	0.94	32.46	18.62	2.51
2800.0	15.70	32.11	11.89	7.67	2.54	0.89	31.97	18.81	2.54
2900.0	15.69	33.91	13.35	6.45	3.00	0.81	32.05	19.14	2.57
3000.0	15.52	33.47	15.16	5.46	2.83	0.71	31.81	19.32	2.66

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 67.01 mA @ Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
20.0	18.20	20.64	6.85	8.30	0.73	0.60	38.35	20.20	2.03
30.0	17.12	20.02	9.60	11.28	0.88	0.60	36.16	20.29	2.11
40.0	16.60	19.81	11.61	13.58	0.95	0.60	35.52	19.92	1.99
50.0	16.32	19.61	13.03	15.32	0.99	0.59	36.38	19.89	2.02
60.0	16.11	19.48	14.23	17.05	1.01	0.58	37.93	20.12	1.95
70.0	16.00	19.59	15.30	18.47	1.04	0.60	38.93	20.16	1.95
80.0	15.92	19.55	16.15	19.79	1.05	0.60	38.75	19.99	2.03
90.0	15.87	19.53	16.73	20.93	1.06	0.60	37.55	19.99	1.99
100.0	15.83	19.55	17.24	21.93	1.07	0.60	37.68	19.99	2.01
150.0	15.73	19.50	18.78	26.16	1.08	0.60	38.34	19.95	1.99
200.0	15.68	19.52	19.19	29.23	1.09	0.60	38.37	19.72	1.95
250.0	15.64	19.56	19.20	31.78	1.09	0.61	38.32	19.80	2.09
300.0	15.62	19.54	18.86	35.44	1.09	0.61	37.63	19.76	2.16
350.0	15.59	19.57	18.52	38.88	1.09	0.62	38.96	19.89	2.21
400.0	15.57	19.61	18.11	44.36	1.10	0.62	39.23	19.95	2.15
450.0	15.54	19.66	17.86	44.32	1.10	0.63	38.55	19.91	2.17
500.0	15.52	19.67	17.59	40.59	1.10	0.63	38.37	19.81	2.17
600.0	15.47	19.76	17.03	34.92	1.11	0.65	37.84	19.83	2.25
700.0	15.41	19.86	16.56	32.45	1.12	0.66	39.52	19.90	2.29
800.0	15.35	19.96	16.22	30.51	1.13	0.67	38.22	19.82	2.14
900.0	15.30	20.07	16.02	28.66	1.14	0.69	37.41	19.47	2.20
1000.0	15.23	20.24	16.01	27.06	1.15	0.70	36.64	19.43	2.18
1050.0	15.20	20.30	16.04	26.52	1.16	0.71	36.79	19.44	2.18
1100.0	15.19	20.40	16.12	25.93	1.17	0.71	36.50	19.48	2.27
1200.0	15.13	20.56	16.40	25.02	1.18	0.73	37.45	19.51	2.29
1300.0	15.08	20.74	16.93	23.92	1.20	0.74	36.79	19.27	2.23
1400.0	15.03	20.96	17.61	22.90	1.23	0.75	35.84	19.12	2.27
1500.0	14.99	21.16	18.62	22.21	1.25	0.76	35.84	19.08	2.24
1600.0	14.96	21.42	20.08	21.43	1.28	0.77	35.89	19.20	2.20
1700.0	14.94	21.70	21.70	20.64	1.31	0.78	35.44	18.88	2.14
1800.0	14.92	22.02	23.14	19.96	1.34	0.80	35.35	18.86	2.19
1900.0	14.93	22.36	23.04	19.21	1.37	0.81	34.75	18.51	2.27
2000.0	14.96	22.73	20.98	18.43	1.39	0.83	33.96	18.40	2.24
2100.0	14.99	23.16	18.38	17.39	1.42	0.85	33.98	18.44	2.22
2200.0	15.04	23.74	16.09	16.28	1.46	0.88	33.63	18.46	2.29
2300.0	15.11	24.45	14.22	15.11	1.51	0.91	33.44	18.28	2.23
2400.0	15.22	25.30	12.75	13.78	1.56	0.94	32.78	18.34	2.28
2500.0	15.35	26.49	11.68	12.29	1.66	0.96	32.71	18.09	2.15
2600.0	15.47	27.97	11.17	10.82	1.83	0.97	32.27	18.29	2.42
2700.0	15.61	30.01	11.19	9.35	2.14	0.95	32.17	18.40	2.46
2800.0	15.70	32.75	11.89	7.96	2.77	0.90	31.95	18.60	2.50
2900.0	15.68	34.94	13.36	6.70	3.43	0.82	31.87	18.94	2.52
3000.0	15.52	34.06	15.17	5.68	3.08	0.73	31.93	19.12	2.62

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)









Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)








TEST CONDITIONS: Vd = 5.25V, Id = 73.78 mA @ Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
20.0	18.23	20.64	6.90	8.30	0.74	0.59	35.04	20.65	2.15
30.0	17.16	20.08	9.67	11.30	0.88	0.60	42.04	20.70	2.16
40.0	16.65	19.82	11.65	13.57	0.95	0.59	37.38	20.30	2.08
50.0	16.37	19.64	13.07	15.38	0.99	0.58	36.58	20.26	2.02
60.0	16.16	19.58	14.34	17.11	1.02	0.59	37.41	20.53	2.02
70.0	16.06	19.67	15.34	18.53	1.04	0.60	38.71	20.57	1.96
80.0	15.98	19.65	16.15	19.88	1.05	0.60	39.02	20.38	2.05
90.0	15.93	19.60	16.72	21.05	1.06	0.60	37.79	20.40	2.03
100.0	15.89	19.57	17.26	22.07	1.06	0.59	38.62	20.39	2.03
150.0	15.79	19.59	18.75	26.54	1.08	0.60	39.62	20.36	2.05
200.0	15.74	19.56	19.14	30.09	1.08	0.60	39.18	20.12	2.01
250.0	15.71	19.60	19.14	33.25	1.09	0.61	39.30	20.22	2.13
300.0	15.68	19.60	18.79	38.00	1.09	0.61	40.71	20.16	2.23
350.0	15.65	19.61	18.45	44.05	1.09	0.61	39.74	20.31	2.20
400.0	15.63	19.68	18.03	62.05	1.10	0.62	38.90	20.35	2.19
450.0	15.61	19.70	17.79	43.20	1.10	0.63	39.08	20.30	2.19
500.0	15.58	19.71	17.54	38.62	1.10	0.63	38.66	20.22	2.22
600.0	15.53	19.78	16.95	33.57	1.11	0.64	39.45	20.26	2.30
700.0	15.47	19.91	16.51	31.18	1.12	0.66	39.71	20.31	2.30
800.0	15.42	20.02	16.16	29.21	1.13	0.67	42.68	20.24	2.17
900.0	15.36	20.15	15.96	27.45	1.14	0.68	38.26	19.88	5.16
1000.0	15.29	20.33	15.95	25.98	1.15	0.70	37.49	19.86	2.22
1050.0	15.26	20.39	15.98	25.45	1.16	0.71	37.70	19.83	2.23
1100.0	15.24	20.46	16.06	24.90	1.17	0.71	37.21	19.86	2.31
1200.0	15.19	20.63	16.35	24.01	1.19	0.73	37.92	19.92	2.31
1300.0	15.14	20.84	16.87	22.96	1.21	0.74	37.68	19.68	2.26
1400.0	15.08	21.03	17.58	21.98	1.23	0.75	36.41	19.52	2.32
1500.0	15.04	21.25	18.56	21.32	1.25	0.76	37.18	19.51	2.24
1600.0	15.01	21.48	20.02	20.55	1.28	0.77	36.37	19.64	2.26
1700.0	14.98	21.77	21.69	19.76	1.31	0.78	36.36	19.32	2.23
1800.0	14.97	22.06	23.20	19.04	1.33	0.80	36.32	19.30	2.24
1900.0	14.97	22.39	23.18	18.28	1.36	0.81	35.17	18.93	2.28
2000.0	14.99	22.78	21.16	17.48	1.39	0.83	35.09	18.83	2.24
2100.0	15.02	23.20	18.48	16.54	1.42	0.85	34.68	18.86	2.21
2200.0	15.07	23.74	16.16	15.44	1.45	0.87	34.19	18.88	2.34
2300.0	15.14	24.42	14.26	14.33	1.49	0.90	34.02	18.70	2.29
2400.0	15.24	25.27	12.79	13.05	1.54	0.93	33.51	18.74	2.34
2500.0	15.36	26.28	11.71	11.63	1.61	0.95	33.23	18.51	2.23
2600.0	15.49	27.64	11.19	10.25	1.74	0.95	32.55	18.70	2.47
2700.0	15.63	29.55	11.18	8.83	2.00	0.93	32.66	18.79	2.55
2800.0	15.71	31.74	11.89	7.50	2.41	0.88	32.10	18.98	2.56
2900.0	15.69	33.38	13.35	6.30	2.80	0.80	32.33	19.30	2.60
3000.0	15.53	33.00	15.15	5.33	2.65	0.70	31.94	19.48	2.70


Typical Performance Curves

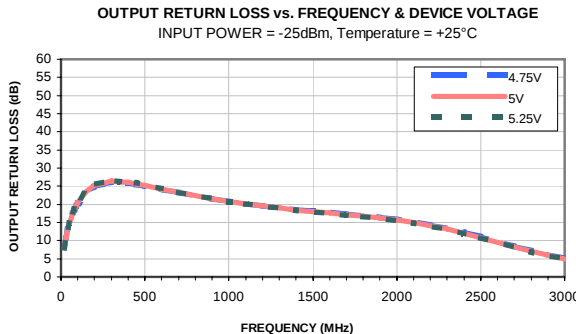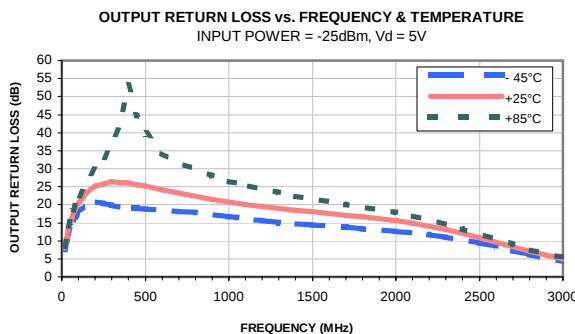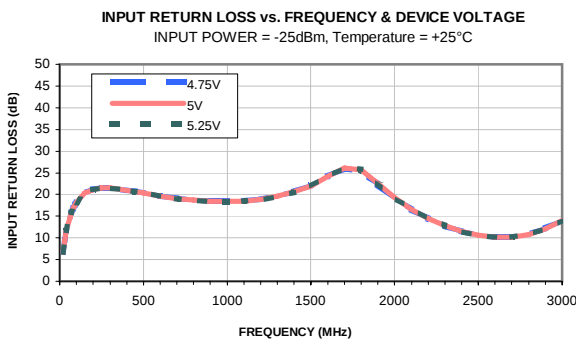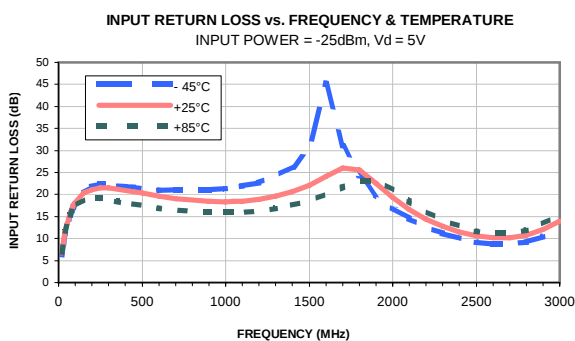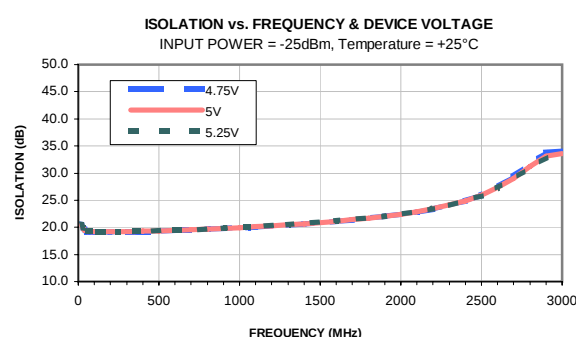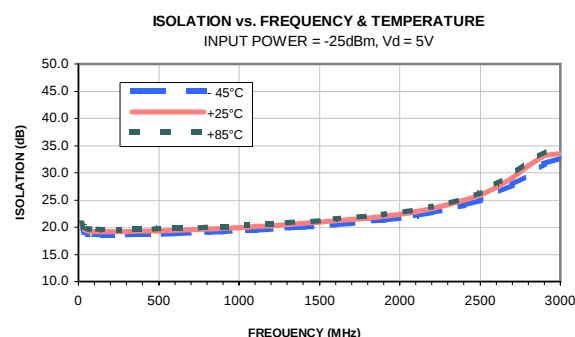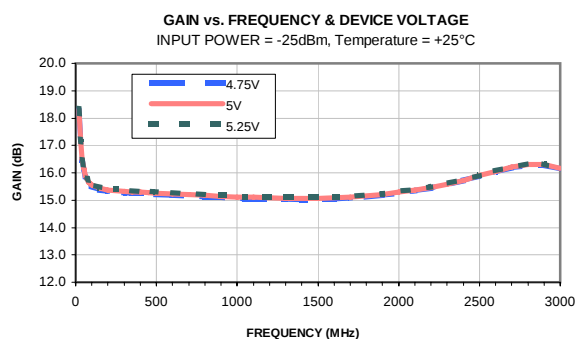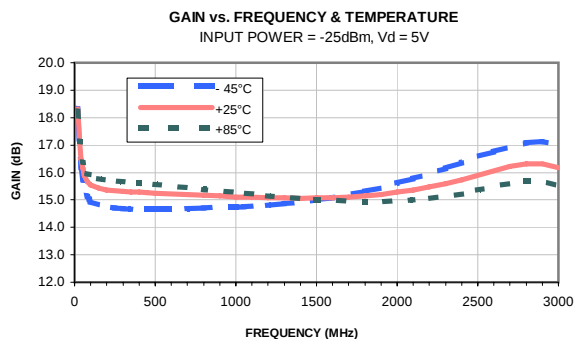


Typical Performance Curves

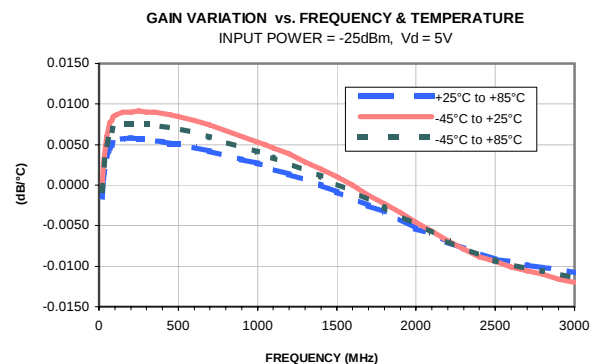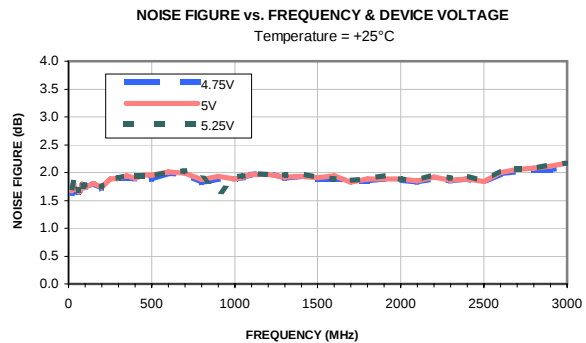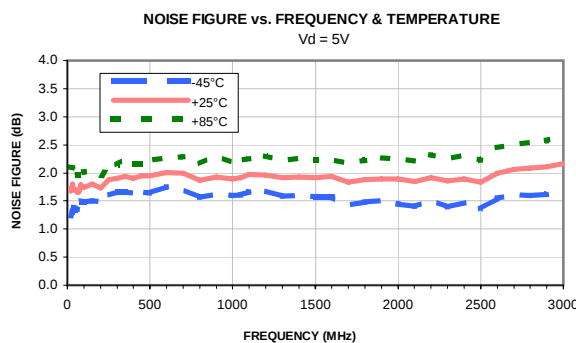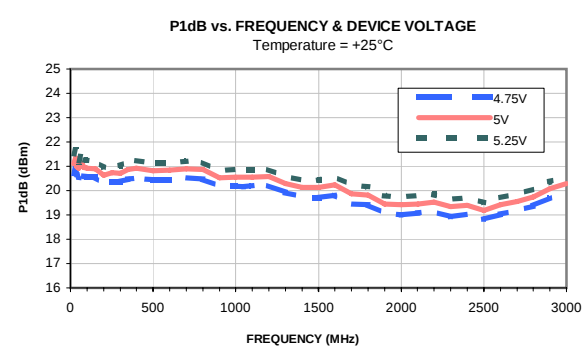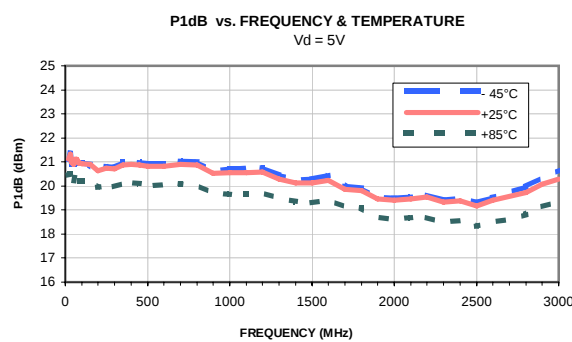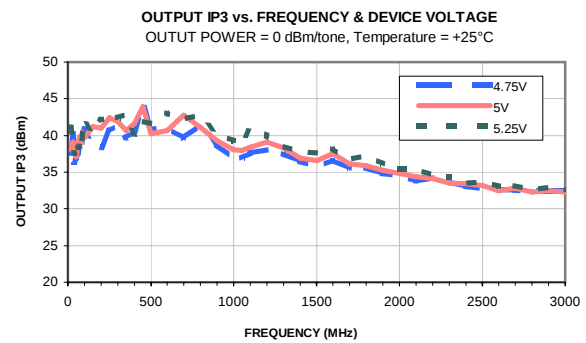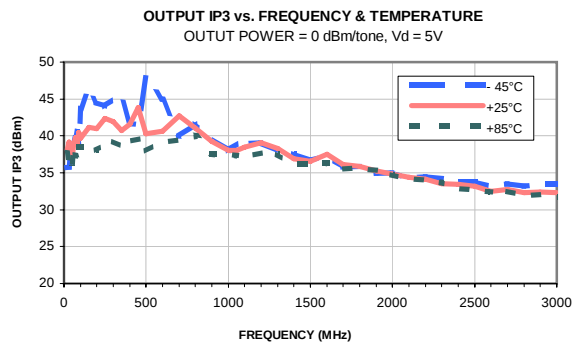

Outline Dimensions

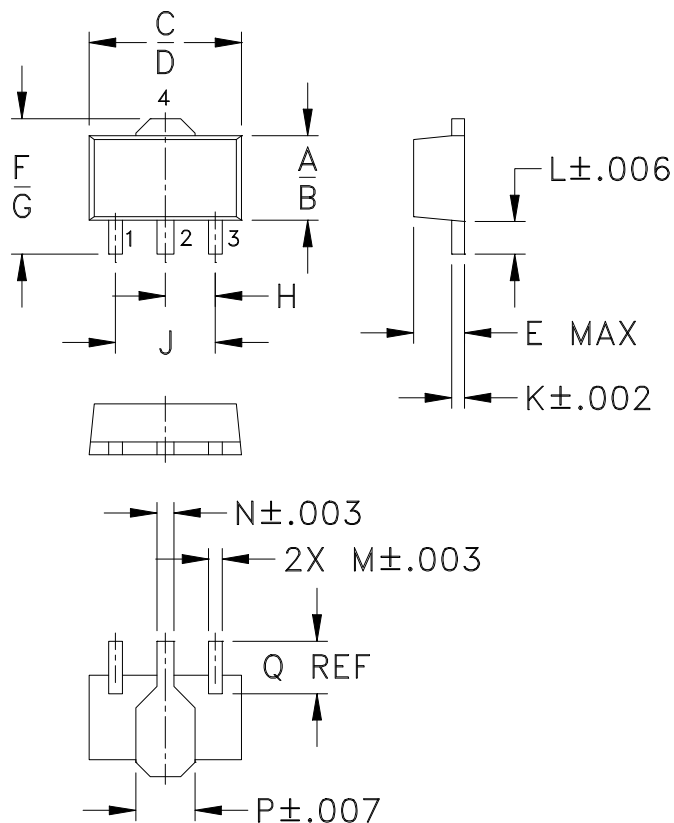

PCB Land Pattern

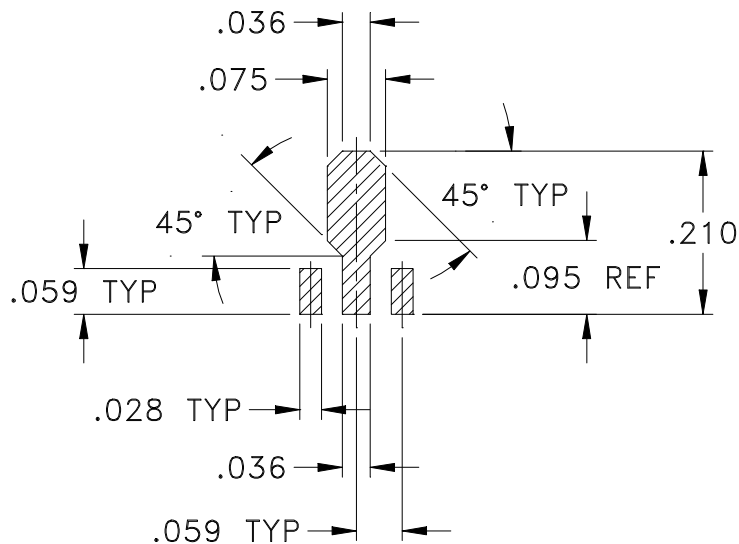

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
DF782	.102 (2.59)	.090 (2.29)	.181 (4.60)	.173 (4.39)	.063 (1.60)	.167 (4.24)	.155 (3.94)	.059 (1.50)	.118 (3.00)	.015 (0.38)	.041 (1.04)	.016 (0.41)

CASE #	N	P	Q	WT. GRAM
DF782	.019 (0.48)	.065 (1.65)	.062 (1.57)	.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin.
All models, (+) suffix. See model Data sheet.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



INTERNET <http://www.minicircuits.com>


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F55

DEVICE ORIENTATION IN T&R

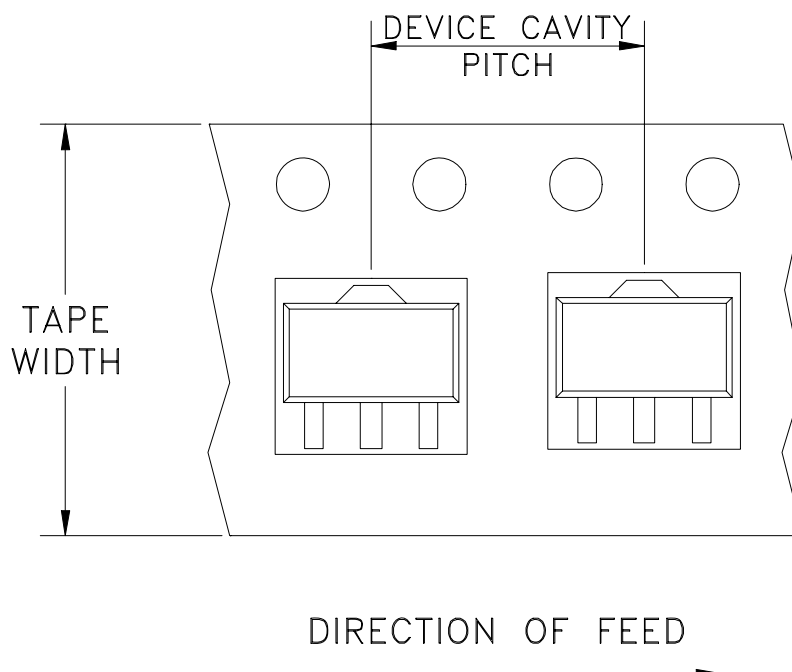

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standard (see note)	20
				50
				100
				200
				500
			Standard	1000

Note: Please consult individual model data sheet to determine device per reel availability.


Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M137326	NEW RELEASE	07/10/12	PW	DJ

SUGGESTED MOUNTING CONFIGURATION
FOR DF782 CASE STYLE, "04AM03" PIN CODE

32X ϕ .010 PTH FOR
GROUND. TO AVOID
SOLDER WICKING,
PLUG THESE HOLES

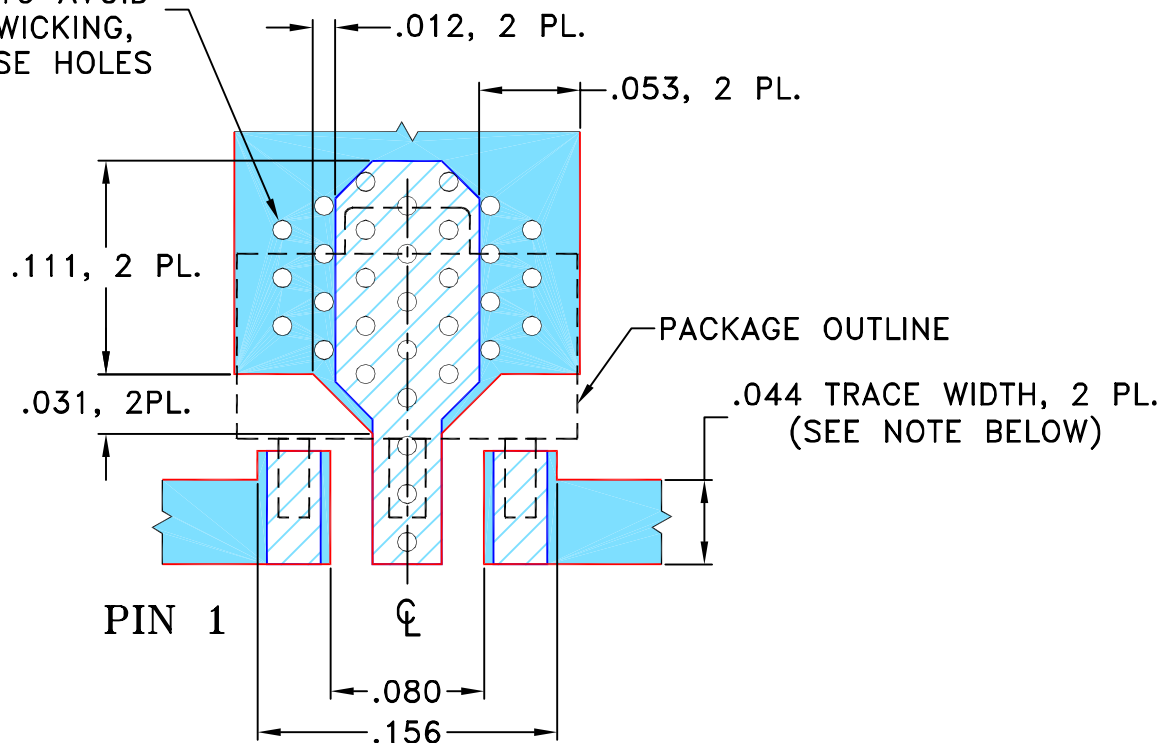

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" $\pm$.0015"; COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

PW

06/01/12

CHECKED

IL

07/10/12

APPROVED

DJ

07/10/12

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, 04AM03, DF782, TB-678-105+

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-370

REV:

OR

FILE:

98PL370



SCALE:

10:1

SHEET:

1 OF 1

Evaluation Board and Circuit

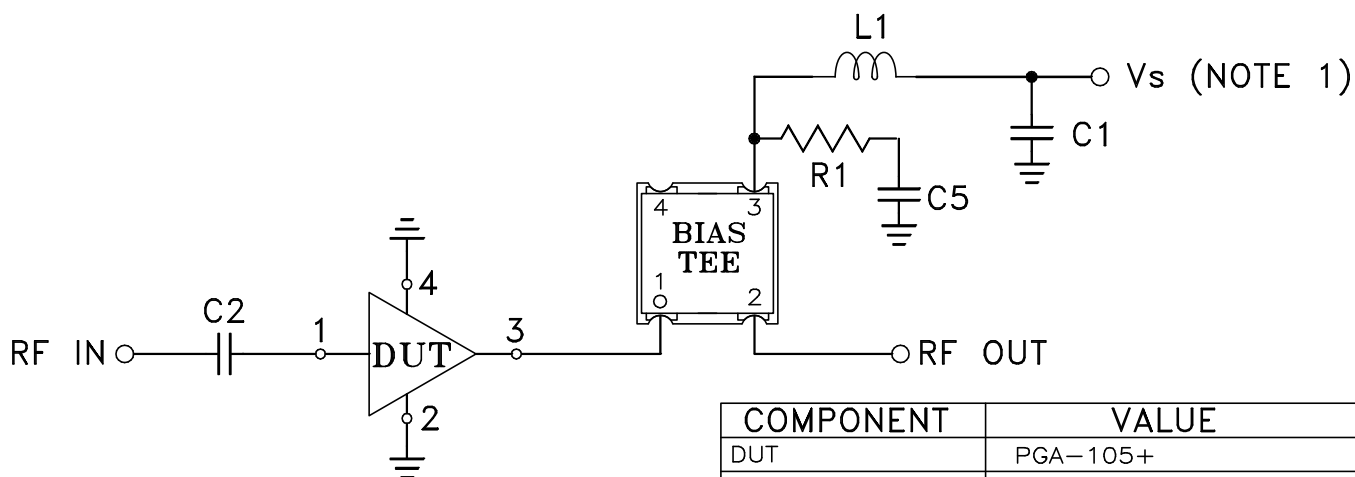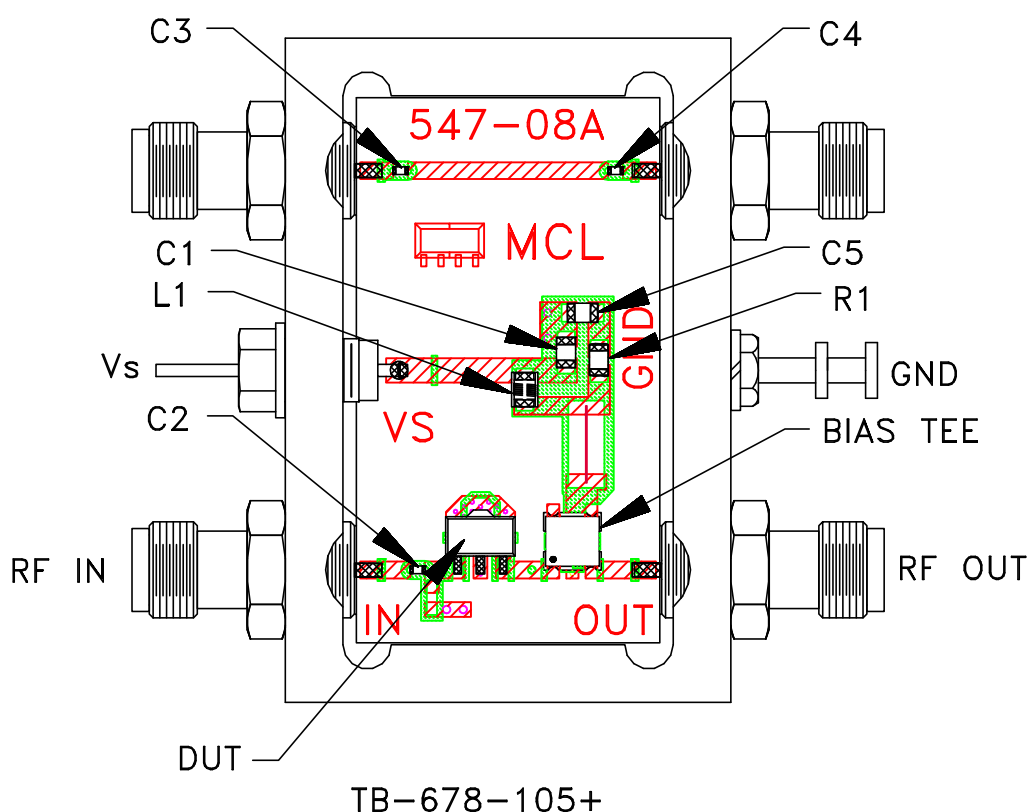

COMPONENT	VALUE
DUT	PGA-105+
C1,C5	0.1 uF(size 0805)
C2-C4 (Note 4)	0.001 uF(size 0402)
R1	33.2 Ohm
L1	43 nH
BIAS TEE	Mini-Circuits TCBT-14+


Schematic Diagram

NOTES:


1. Vs voltage: $+5 \pm 0.2V$.
2. SMA Female connectors.
3. PCB material: Rogers R04350 or equivalent, dielectric constant=3.5, dielectric thickness=.020 inch.
4. Capacitor C2-C4 should be free of resonance up to the highest frequency specified.

 **Mini-Circuits®**

Evaluation Board and Circuit

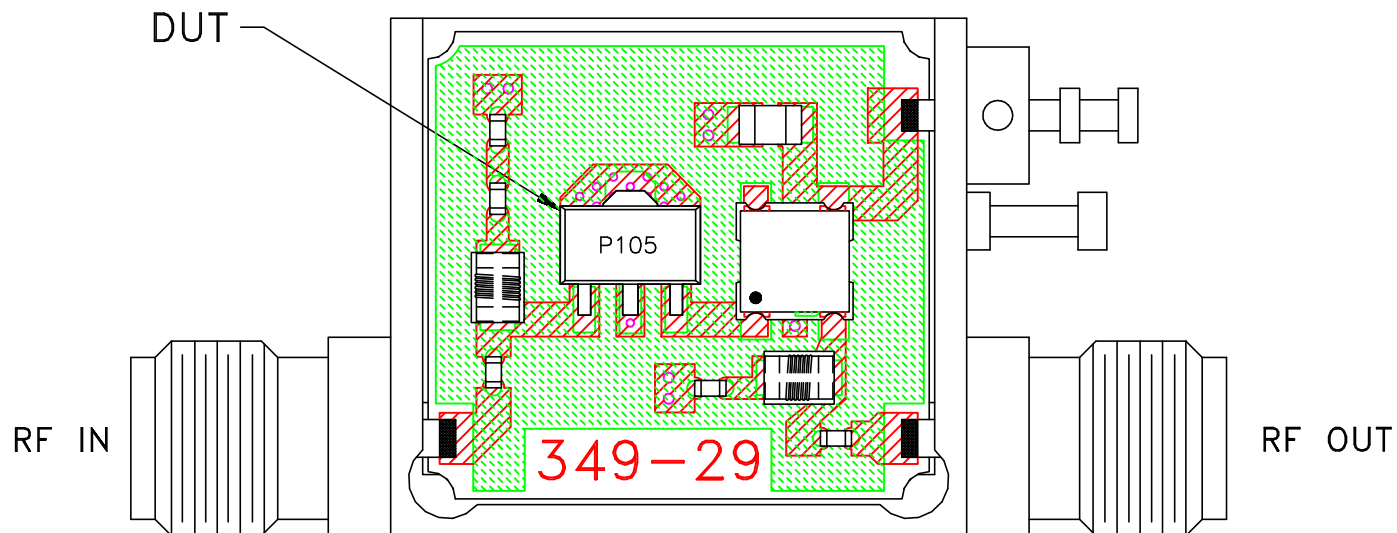

TB-733-105+

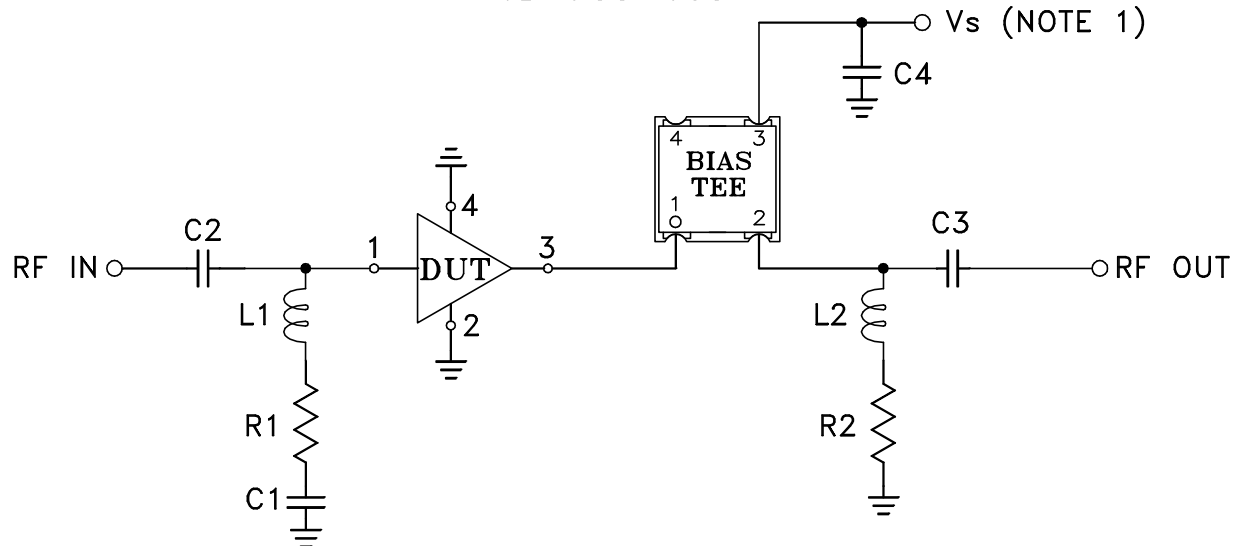

COMPONENT	VALUE	SIZE
DUT	PGA-105+	SOT-89
C1	4700 pF	0402
C2,C3	2200 pF	0402
C4	0.1 uF	0805
R1	14 Ohm	0402
R2	50 Ohm	0402
L1	390 nH	0805
L2	330 nH	0805
BIAS TEE	Mini-Circuits TCBT-14+	

NOTES:

1. Vs voltage: $+5 \pm 0.2V$.
2. SMA Female connectors.
3. PCB material: Rogers R04350 or equivalent,
dielectric constant=3.5,
dielectric thickness=.020 inch.

Schematic Diagram

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C or -45° to 85° C or -55° to 105° C or -40° to 105° C or -40° to 95° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C or -65° to 150° Ambient Environment	Individual Model Data Sheet
HTOL	1000 hours at 125°C	MIL-STD-883, Method 1005, Condition B
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215