

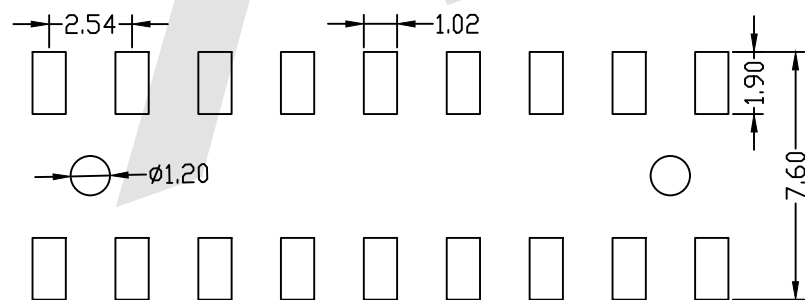



HSF

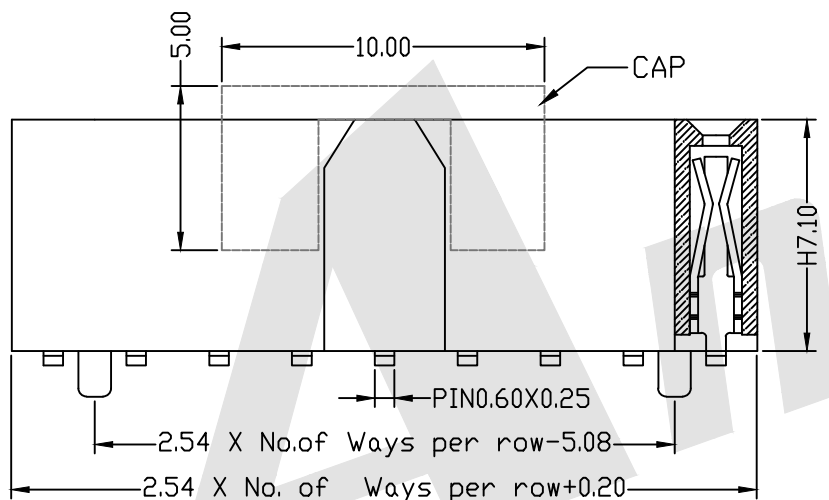


ROHS

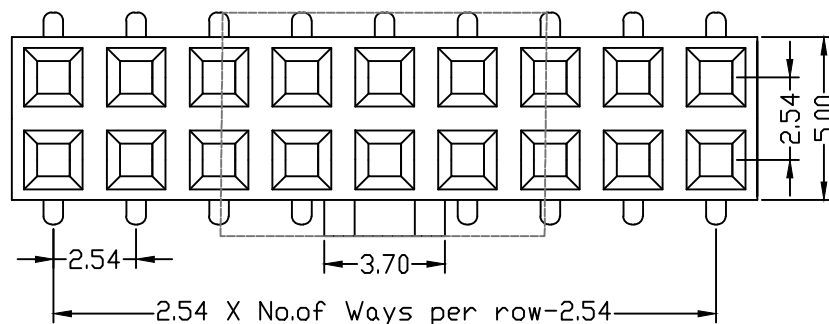

PCB LAYOUT

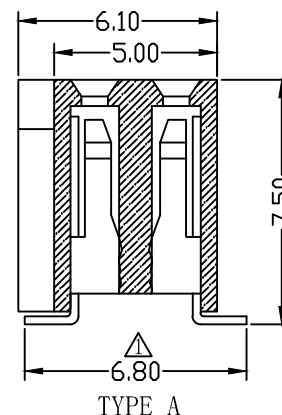

TYPE A

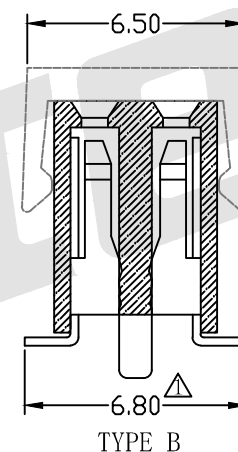

TYPE B

## SPECIFICATION

|                          |                     |
|--------------------------|---------------------|
| Current Rating:          | 3.0 Amp             |
| Insulation Resistance:   | 1000M ohms min      |
| Contact Resistance:      | 20M ohms max        |
| Dielectric Withstanding: | AC500V              |
| Operating Temperature:   | -65°C to +125°C     |
| Contact Material:        | Brass               |
| Insulator Material:      | PA6T,UL 94V-0 Black |

Ordering Code:

FHEM13 - X - X - D - X - X - X - X  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:  
② No. of Contacts  
02 To 80  
③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3u" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u" Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN:Tin  
④ Connector Type  
D: Dual  
⑤ Plastic High:  
H: 7.1  
Please mark the desired length in the H
- ⑥ Insulator Material  
A: PBT  
B: PA6T  
C: LCP  
D: PA46  
E: PA9T  
⑦ Packing  
A: Tray  
B: Bag  
T: Tube  
U: Tube+CAP  
R: Tape&Reel  
W: Tape&Reel+CAP  
⑧ With locating pegs option  
A: Type A without pegs  
B: Type B with pegs

Unless Otherwise specified tolerance  
X. XX: ±0.20  
X. X: ±0.25  
X. XXX: ±0.15

SCALE:  
As Shown  
DRAW  
YG ZHONG  
CHECK  
BobYang

UNIT:  
mm  
DATE  
01/05/2016  
DATE  
01/05/2016



ANTENK ELECTRONICS CO., LTD  
Http://www.antenk.com  
E-mail:sales@antenk.com

TITLE:

2.54mm Female Header Dual Row SMT Type With Bump H:7.1

DRAWING NO:

FHEM13-XXDXXXX

PRODUCT NO:

FHEM13-XXDXXXX


△ Revise the size of 6.5 to 6.8

02/03/2022

REV

DESCRIPTION

DATE



3rd ANGLE PROJECTION