
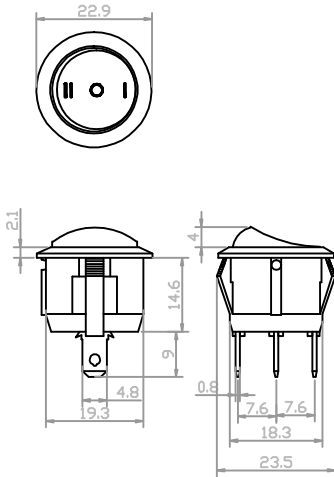


成品确认书



主要技术特性要求:

1. 使用温度范围: $-25\sim+85^{\circ}\text{C}$ (25T85)
2. 额定工作电压、电流: 6A 250V AC
3. 绝缘电阻: $\geq 100\text{M}\Omega$
4. 接触电阻: $\leq 0.03\text{m}\Omega$
5. 耐压: AC150V(50Hz)/min
6. 抗电强度: $\geq 1500\text{V AC/min}$
7. 寿命: 10000次

品质部 / 日期			5	灯泡	0	普通灯泡				
			4	垫子	1	PA66				
生产部 / 日期			3	中丝通针	3	黄铜	电镀铜锡			
			2	尼龙	1	黄铜	电镀铜锡			
审核 / 日期			1	底座	1	PA66				
			序号	名称	数量	材 料	处 理	单件 质 量	总计	备 注
普通公差: COMMON TOLERANCE:										
×.××	±0.10	单位	mm	投影		品名	船型开关	比例	1 : 1	
×.×	±0.15	绘图		核对		型号	KCD2-103			
×	±0.25	日期		核准		图号	KCD1-114			

