

# NPN Silicon Planar Epitaxial Transistor

## PZT2222A

This NPN Silicon Epitaxial transistor is designed for use in linear and switching applications. The device is housed in the SOT-223 package which is designed for medium power surface mount applications.

### Features

- PNP Complement is PZT2907AT1
- The SOT-223 Package Can be Soldered Using Wave or Reflow
- SOT-223 Package Ensures Level Mounting, Resulting in Improved Thermal Conduction, and Allows Visual Inspection of Soldered Joints
- The Formed Leads Absorb Thermal Stress During Soldering, Eliminating the Possibility of Damage to the Die
- Available in 12 mm Tape and Reel
- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant\*

### MAXIMUM RATINGS

| Rating                                                          | Symbol    | Value        | Unit             |
|-----------------------------------------------------------------|-----------|--------------|------------------|
| Collector-Emitter Voltage                                       | $V_{CEO}$ | 40           | Vdc              |
| Collector-Base Voltage                                          | $V_{CBO}$ | 75           | Vdc              |
| Emitter-Base Voltage (Open Collector)                           | $V_{EBO}$ | 6.0          | Vdc              |
| Collector Current                                               | $I_C$     | 600          | mA               |
| Total Power Dissipation up to $T_A = 25^\circ\text{C}$ (Note 1) | $P_D$     | 1.5          | W                |
| Storage Temperature Range                                       | $T_{stg}$ | - 65 to +150 | $^\circ\text{C}$ |
| Junction Temperature Range                                      | $T_J$     | - 55 to +150 | $^\circ\text{C}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1. Device mounted on an epoxy printed circuit board 1.575 inches x 1.575 inches x 0.059 inches; mounting pad for the collector lead min. 0.93 inches<sup>2</sup>.

### THERMAL CHARACTERISTICS


| Rating                                                                | Symbol          | Value     | Unit                    |
|-----------------------------------------------------------------------|-----------------|-----------|-------------------------|
| Thermal Resistance, Junction-to-Ambient                               | $R_{\theta JA}$ | 83.3      | $^\circ\text{C/W}$      |
| Lead Temperature for Soldering, 0.0625" from case Time in Solder Bath | $T_L$           | 260<br>10 | $^\circ\text{C}$<br>Sec |

\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


## SOT-223 PACKAGE NPN SILICON TRANSISTOR SURFACE MOUNT



SOT-223 (TO-261)  
CASE 318E-04  
STYLE 1



### MARKING DIAGRAM



- A = Assembly Location  
Y = Year  
M = Month Code  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

### ORDERING INFORMATION

| Device       | Package           | Shipping <sup>†</sup> |
|--------------|-------------------|-----------------------|
| PZT2222AT1G  | SOT-223 (Pb-Free) | 1,000 Tape & Reel     |
| SPZT2222AT1G | SOT-223 (Pb-Free) | 1,000 Tape & Reel     |
| PZT2222AT3G  | SOT-223 (Pb-Free) | 4,000 Tape & Reel     |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# PZT2222A

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

### OFF CHARACTERISTICS

|                                                                                                                                                           |                      |        |          |              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------|----------|--------------|
| Collector-Emitter Breakdown Voltage (I <sub>C</sub> = 10 mAdc, I <sub>B</sub> = 0)                                                                        | V <sub>(BR)CEO</sub> | 40     | –        | Vdc          |
| Collector-Base Breakdown Voltage (I <sub>C</sub> = 10 μAdc, I <sub>E</sub> = 0)                                                                           | V <sub>(BR)CBO</sub> | 75     | –        | Vdc          |
| Emitter-Base Breakdown Voltage (I <sub>E</sub> = 10 μAdc, I <sub>C</sub> = 0)                                                                             | V <sub>(BR)EBO</sub> | 6.0    | –        | Vdc          |
| Base-Emitter Cutoff Current (V <sub>CE</sub> = 60 Vdc, V <sub>BE</sub> = – 3.0 Vdc)                                                                       | I <sub>BEX</sub>     | –      | 20       | nAdc         |
| Collector-Emitter Cutoff Current (V <sub>CE</sub> = 60 Vdc, V <sub>BE</sub> = – 3.0 Vdc)                                                                  | I <sub>CEX</sub>     | –      | 10       | nAdc         |
| Emitter-Base Cutoff Current (V <sub>EB</sub> = 3.0 Vdc, I <sub>C</sub> = 0)                                                                               | I <sub>EBO</sub>     | –      | 100      | nAdc         |
| Collector-Base Cutoff Current<br>(V <sub>CB</sub> = 60 Vdc, I <sub>E</sub> = 0)<br>(V <sub>CB</sub> = 60 Vdc, I <sub>E</sub> = 0, T <sub>A</sub> = 125°C) | I <sub>CBO</sub>     | –<br>– | 10<br>10 | nAdc<br>μAdc |

### ON CHARACTERISTICS

|                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                      |                                         |                                              |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------------------------------|----------------------------------------------|-------|
| DC Current Gain<br>(I <sub>C</sub> = 0.1 mAdc, V <sub>CE</sub> = 10 Vdc)<br>(I <sub>C</sub> = 1.0 mAdc, V <sub>CE</sub> = 10 Vdc)<br>(I <sub>C</sub> = 10 mAdc, V <sub>CE</sub> = 10 Vdc)<br>(I <sub>C</sub> = 10 mAdc, V <sub>CE</sub> = 10 Vdc, T <sub>A</sub> = – 55°C)<br>(I <sub>C</sub> = 150 mAdc, V <sub>CE</sub> = 10 Vdc)<br>(I <sub>C</sub> = 150 mAdc, V <sub>CE</sub> = 1.0 Vdc)<br>(I <sub>C</sub> = 500 mAdc, V <sub>CE</sub> = 10 Vdc) | h <sub>FE</sub>      | 35<br>50<br>70<br>35<br>100<br>50<br>40 | –<br>–<br>–<br>–<br>300<br>–<br>–            | –     |
| Collector-Emitter Saturation Voltages<br>(I <sub>C</sub> = 150 mAdc, I <sub>B</sub> = 15 mAdc)<br>(I <sub>C</sub> = 500 mAdc, I <sub>B</sub> = 50 mAdc)                                                                                                                                                                                                                                                                                                | V <sub>CE(sat)</sub> | –<br>–                                  | 0.3<br>1.0                                   | Vdc   |
| Base-Emitter Saturation Voltages<br>(I <sub>C</sub> = 150 mAdc, I <sub>B</sub> = 15 mAdc)<br>(I <sub>C</sub> = 500 mAdc, I <sub>B</sub> = 50 mAdc)                                                                                                                                                                                                                                                                                                     | V <sub>BE(sat)</sub> | 0.6<br>–                                | 1.2<br>2.0                                   | Vdc   |
| Input Impedance<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 1.0 mAdc, f = 1.0 kHz)<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 10 mAdc, f = 1.0 kHz)                                                                                                                                                                                                                                                                                             | h <sub>ie</sub>      | 2.0<br>0.25                             | 8.0<br>1.25                                  | kΩ    |
| Voltage Feedback Ratio<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 1.0 mAdc, f = 1.0 kHz)<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 10 mAdc, f = 1.0 kHz)                                                                                                                                                                                                                                                                                      | h <sub>re</sub>      | –<br>–                                  | 8.0×10 <sup>–4</sup><br>4.0×10 <sup>–4</sup> | –     |
| Small-Signal Current Gain<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 1.0 mAdc, f = 1.0 kHz)<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 10 mAdc, f = 1.0 kHz)                                                                                                                                                                                                                                                                                   | h <sub>fe</sub>      | 50<br>75                                | 300<br>375                                   | –     |
| Output Admittance<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 1.0 mAdc, f = 1.0 kHz)<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 10 mAdc, f = 1.0 kHz)                                                                                                                                                                                                                                                                                           | h <sub>oe</sub>      | 5.0<br>25                               | 35<br>200                                    | μmhos |
| Noise Figure (V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 100 μAdc, f = 1.0 kHz)                                                                                                                                                                                                                                                                                                                                                                        | F                    | –                                       | 4.0                                          | dB    |

### DYNAMIC CHARACTERISTICS


|                                                                                                       |                |     |     |     |
|-------------------------------------------------------------------------------------------------------|----------------|-----|-----|-----|
| Current-Gain – Bandwidth Product<br>(I <sub>C</sub> = 20 mAdc, V <sub>CE</sub> = 20 Vdc, f = 100 MHz) | f <sub>T</sub> | 300 | –   | MHz |
| Output Capacitance (V <sub>CB</sub> = 10 Vdc, I <sub>E</sub> = 0, f = 1.0 MHz)                        | C <sub>c</sub> | –   | 8.0 | pF  |
| Input Capacitance (V <sub>EB</sub> = 0.5 Vdc, I <sub>C</sub> = 0, f = 1.0 MHz)                        | C <sub>e</sub> | –   | 25  | pF  |

### SWITCHING TIMES (T<sub>A</sub> = 25°C)

|              |                                                                                                                                    |                |   |     |    |
|--------------|------------------------------------------------------------------------------------------------------------------------------------|----------------|---|-----|----|
| Delay Time   | (V <sub>CC</sub> = 30 Vdc, I <sub>C</sub> = 150 mAdc,<br>I <sub>B(on)</sub> = 15 mAdc, V <sub>EB(off)</sub> = 0.5 Vdc)<br>Figure 1 | t <sub>d</sub> | – | 10  | ns |
| Rise Time    |                                                                                                                                    | t <sub>r</sub> | – | 25  |    |
| Storage Time | (V <sub>CC</sub> = 30 Vdc, I <sub>C</sub> = 150 mAdc,<br>I <sub>B(on)</sub> = I <sub>B(off)</sub> = 15 mAdc)<br>Figure 2           | t <sub>s</sub> | – | 225 | ns |
| Fall Time    |                                                                                                                                    | t <sub>f</sub> | – | 60  |    |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# PZT2222A

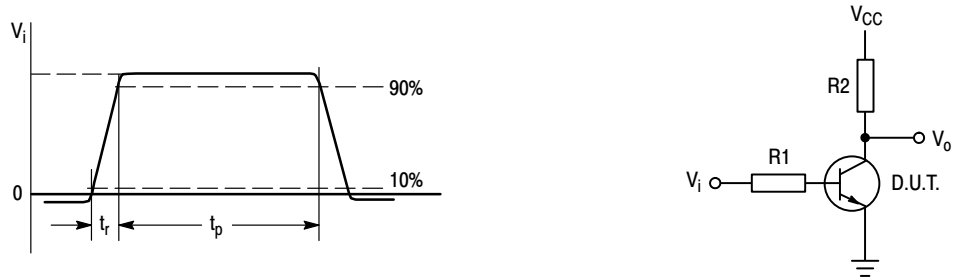

**Figure 1. Input Waveform and Test Circuit for Determining Delay Time and Rise Time**


$V_i = -0.5 \text{ V to } +9.9 \text{ V}$ ,  $V_{CC} = +30 \text{ V}$ ,  $R_1 = 619 \Omega$ ,  $R_2 = 200 \Omega$ .

**PULSE GENERATOR:**

**PULSE DURATION**  $t_p$  3 200 ns  
**RISE TIME**  $t_r$  3 2 ns  
**DUTY FACTOR**  $\delta = 0.02$


**OSCILLOSCOPE:**

**INPUT IMPEDANCE**  $Z_i > 100 \text{ k}\Omega$   
**INPUT CAPACITANCE**  $C_i < 12 \text{ pF}$   
**RISE TIME**  $t_r < 5 \text{ ns}$

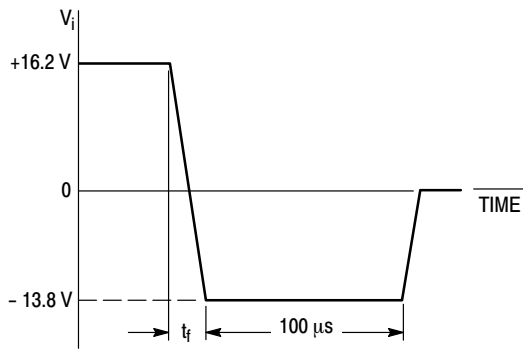


**Figure 2. Input Waveform and Test Circuit for Determining Storage Time and Fall Time**

## TYPICAL CHARACTERISTICS

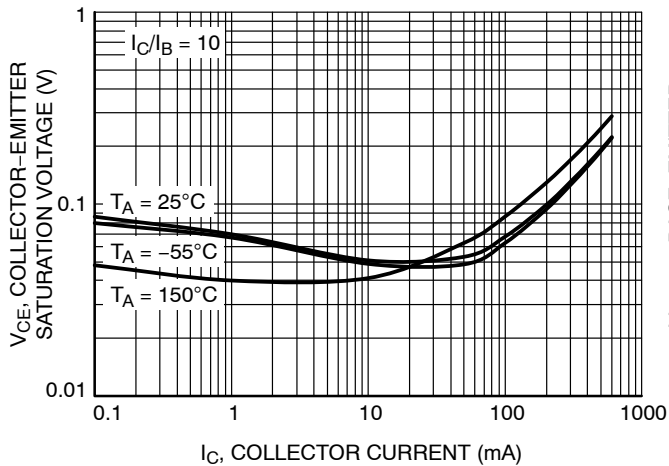

**Figure 3. Collector Emitter Saturation Voltage vs. Collector Current**

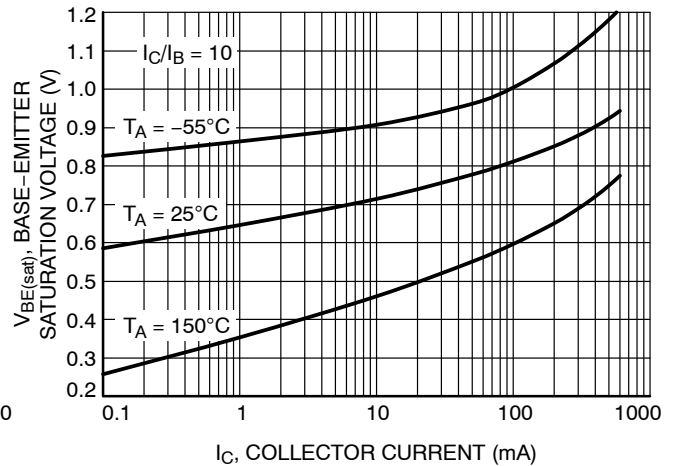

**Figure 4. Base Emitter Saturation Voltage vs. Collector Current**

TYPICAL CHARACTERISTICS

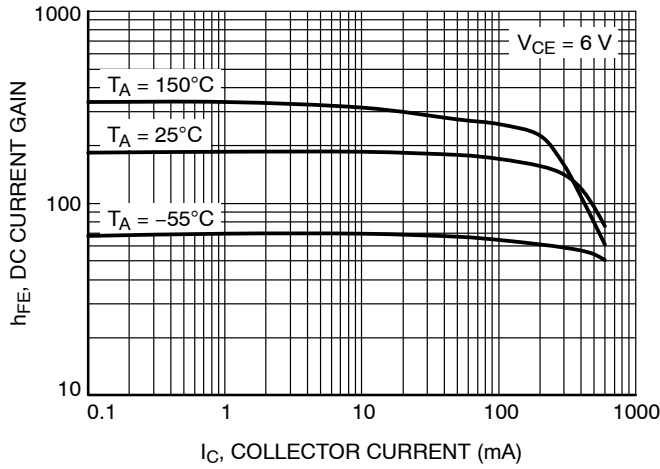


Figure 5. DC Current Gain vs. Collector Current

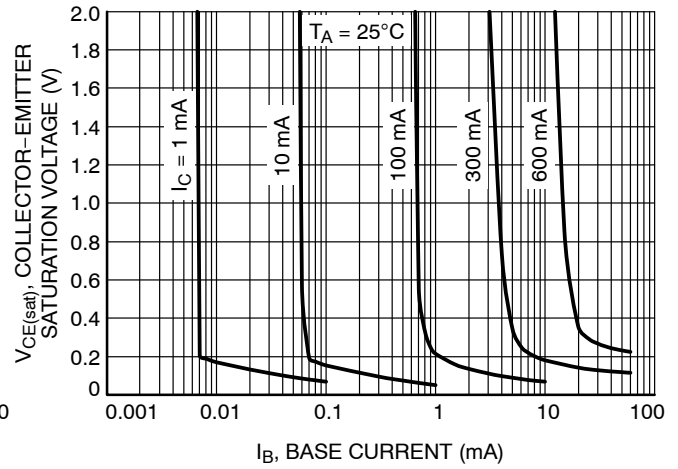


Figure 6. Saturation Region

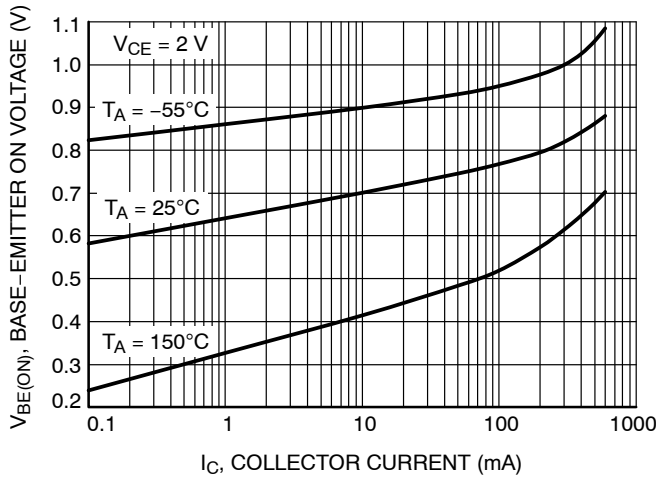


Figure 7. Base-Emitter Turn-On Voltage vs. Collector Current

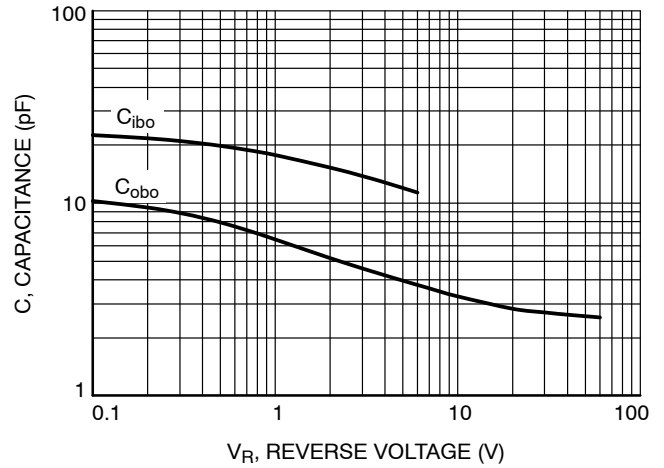


Figure 8. Capacitance

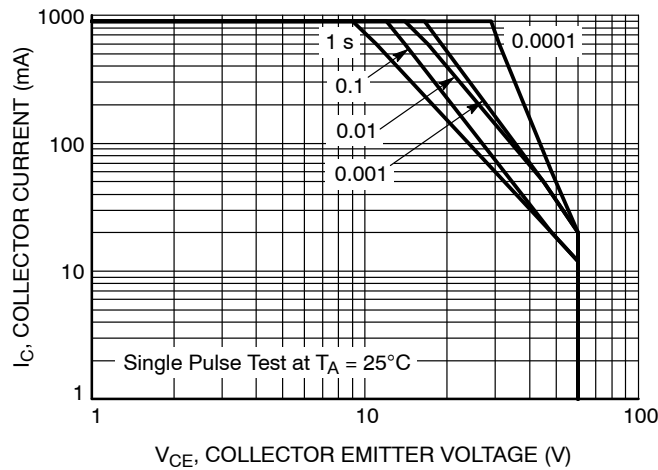



Figure 9. Safe Operating Area



SCALE 1:1


SOT-223 (TO-261)  
CASE 318E-04  
ISSUE R

DATE 02 OCT 2018

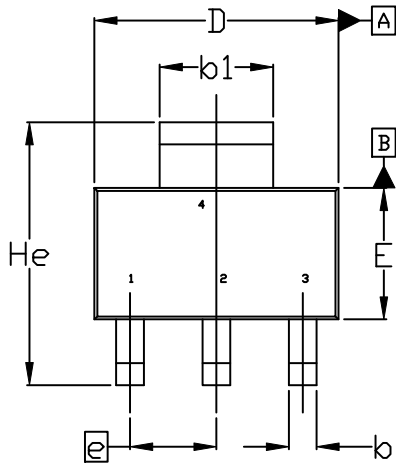


TOP VIEW


$\oplus 0.10 \text{ (M)} \text{ C A B}$   
NOTE 5

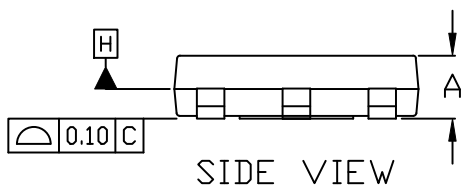

SIDE VIEW



FRONT VIEW

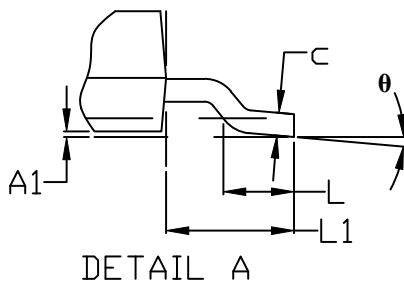


DETAIL A

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSIONS D & E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.200MM PER SIDE.
4. DATUMS A AND B ARE DETERMINED AT DATUM H.
5. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT OF THE PACKAGE BODY.
6. POSITIONAL TOLERANCE APPLIES TO DIMENSIONS b AND b1.

| MILLIMETERS |          |      |      |
|-------------|----------|------|------|
| DIM         | MIN.     | NOM. | MAX. |
| A           | 1.50     | 1.63 | 1.75 |
| A1          | 0.02     | 0.06 | 0.10 |
| b           | 0.60     | 0.75 | 0.89 |
| b1          | 2.90     | 3.06 | 3.20 |
| c           | 0.24     | 0.29 | 0.35 |
| D           | 6.30     | 6.50 | 6.70 |
| E           | 3.30     | 3.50 | 3.70 |
| e           | 2.30 BSC |      |      |
| L           | 0.20     | ---  | ---  |
| L1          | 1.50     | 1.75 | 2.00 |
| He          | 6.70     | 7.00 | 7.30 |
| $\theta$    | 0°       | ---  | 10°  |

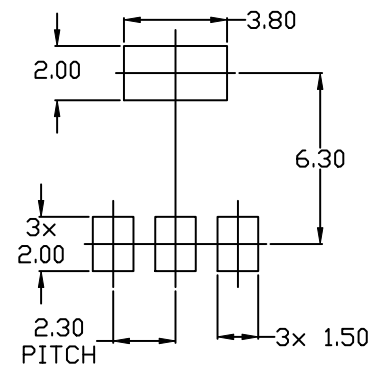

RECOMMENDED MOUNTING  
FOOTPRINT

|                  |                  |                                                                                                                                                                                     |
|------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42680B      | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SOT-223 (TO-261) | PAGE 1 OF 2                                                                                                                                                                         |


onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**SOT-223 (TO-261)**  
**CASE 318E-04**  
**ISSUE R**

DATE 02 OCT 2018

|                                                                              |                                                                             |                                                                               |                                                                       |                                                                       |
|------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|
| <b>STYLE 1:</b><br>PIN 1. BASE<br>2. COLLECTOR<br>3. EMITTER<br>4. COLLECTOR | <b>STYLE 2:</b><br>PIN 1. ANODE<br>2. CATHODE<br>3. NC<br>4. CATHODE        | <b>STYLE 3:</b><br>PIN 1. GATE<br>2. DRAIN<br>3. SOURCE<br>4. DRAIN           | <b>STYLE 4:</b><br>PIN 1. SOURCE<br>2. DRAIN<br>3. GATE<br>4. DRAIN   | <b>STYLE 5:</b><br>PIN 1. DRAIN<br>2. GATE<br>3. SOURCE<br>4. GATE    |
| <b>STYLE 6:</b><br>PIN 1. RETURN<br>2. INPUT<br>3. OUTPUT<br>4. INPUT        | <b>STYLE 7:</b><br>PIN 1. ANODE 1<br>2. CATHODE<br>3. ANODE 2<br>4. CATHODE | <b>STYLE 8:</b><br>CANCELLED                                                  | <b>STYLE 9:</b><br>PIN 1. INPUT<br>2. GROUND<br>3. LOGIC<br>4. GROUND | <b>STYLE 10:</b><br>PIN 1. CATHODE<br>2. ANODE<br>3. GATE<br>4. ANODE |
| <b>STYLE 11:</b><br>PIN 1. MT 1<br>2. MT 2<br>3. GATE<br>4. MT 2             | <b>STYLE 12:</b><br>PIN 1. INPUT<br>2. OUTPUT<br>3. NC<br>4. OUTPUT         | <b>STYLE 13:</b><br>PIN 1. GATE<br>2. COLLECTOR<br>3. EMITTER<br>4. COLLECTOR |                                                                       |                                                                       |

**GENERIC  
MARKING DIAGRAM\***



A = Assembly Location  
 Y = Year  
 W = Work Week  
 XXXXX = Specific Device Code  
 ■ = Pb-Free Package

(Note: Microdot may be in either location)  
 \*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

|                         |                         |                                                                                                                                                                                     |
|-------------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42680B</b>      | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOT-223 (TO-261)</b> | <b>PAGE 2 OF 2</b>                                                                                                                                                                  |

**onsemi** and **Onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)