





成品确认书



主要技术特性要求:

- 1.使用温度范围: -25~+85℃ (25T85)
2.额定工作电压、电流: 3A 250V AC
3.绝缘电阻: ≥100MΩ
4.接触电阻: ≤0.03Ω
5.耐压: AC150V(50Hz)/min
6.抗电强度: ≥1500V AC/min
7.寿命: 10000次

2. 额定工作电压、电流: 3A 250V AC 3. 绝缘电阻: ≥100M Ω 4. 接触电阻: ≤0.03 Ω 5. 耐压: AC150V(50Hz)/min 6. 漏电强度: ≥1500V AC/min 7. 寿命: 10000次				品质部/日期				5	灯泡	0	普通灯泡					
								4	盖子	1	PA66					
				生产部/日期				3	中间轴销	3	黄铜	电镀铜锡				
								2	面板	1	黄铜	电镀铜锡				
				审核/日期				1	底座	1	PA66					
序号	名称	数量	材 料					处 理	零件 质 量	总计	备 注					
A4				普通公差: COMMON TOLERANCE:												
A3																
A2				X.XX	±0.10	单位	mm	投影		品名	船型开关	比例	1:1			
A1				X.X	±0.15	绘图		核对		型号	KCD11-103					
				X	±0.25	日期		核准		图号	KCD1-11					



ROCKER SWITCH

-01-

Model Information

KCD 5 - 1 02 (E) (N) (L) - 2 C3 - R / B

Base color
Cap color
Cap marking
Product Number
Bent terminals
Illuminated
Dot
Circuit function
Poles
Miniature type
Rocker Switch

Specification


1. Rating: () 6A 125VAC; 3A 250VAC
2. Contact Resistance: 35mΩ max
3. Insulation Resistance: 500VDC 100mΩ min
4. Dielectric Strength: 1500VAC, 1minute
5. Operating Temperature: -25°C ~ +85°C
6. Electrical Life: 10'000 Cycles

Circuit function


01	ON	-	OFF
02	ON	-	ON
11	(ON)		OFF
12	ON	-	(ON)
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

() Indicates Momentary


Cap marking

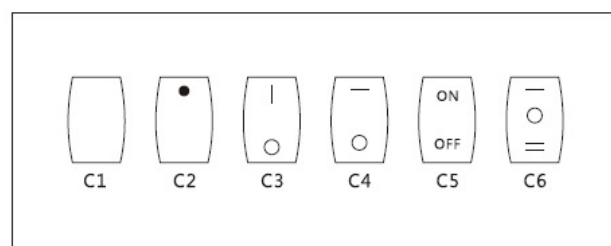


KCD5-101 ON-OFF

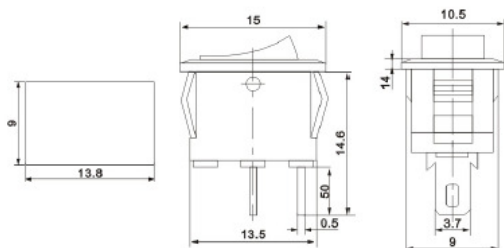


KCD5-303




KCD5-102 ON-ON
KCD5-101/N ON-OFF

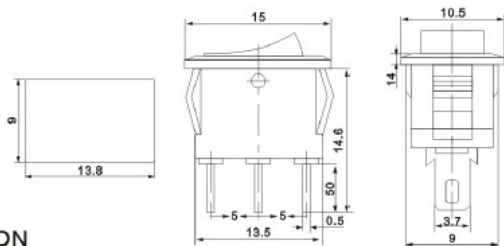


KCD5-304

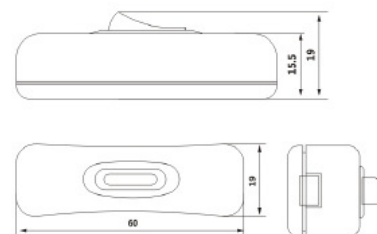


KCD5-101-2 ON-OFF
KCD5-102-2 ON-ON
KCD5-101N-2 ON-OFF

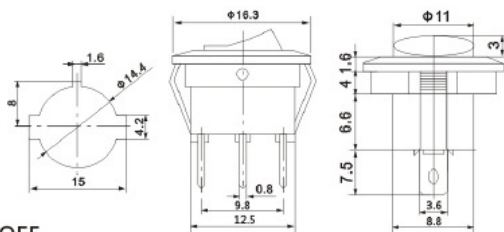


KCD5-305

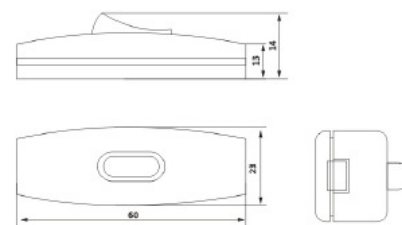

KCD5-102-3 ON-ON

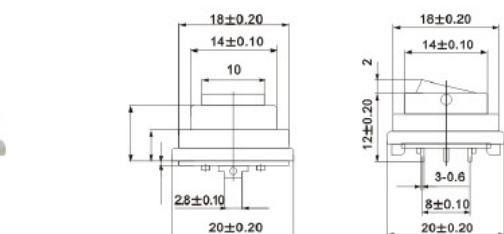


KCD5-322







WPC-1510




KCD5-303-1 SPST
KCD5-303-2 DPST




KCD5-2-101 ON-OFF

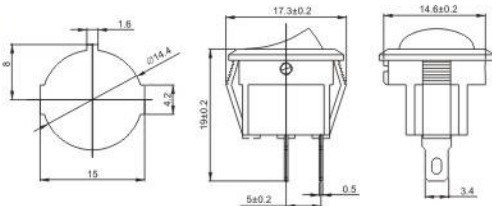


KCD5-304




KCD5-2-102 ON-ON

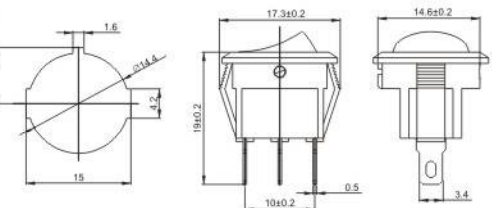


8S.304




KCD5-2-101N ON-OFF

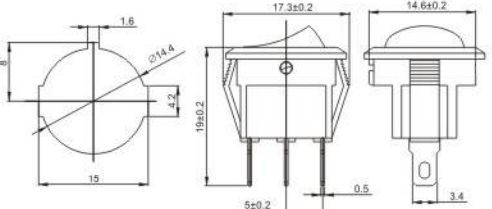


KCD5-305




WPC-16



KCD5-322



KCD5-3-101 ON-OFF



KCD5-307

