

KEYWORDS: UL cable, hook up wire, multicore cable, spiral cable, coiled cable, TPU cable, PUR cable, flat cable, automobile cable, communication cable, CMP cable, power cable, CCC cable, VDE cable, UL1015, UL2464, UL2651, UL2468, UL20549, CL2, CL3...



DONGGUAN WENCHANG ELECTRONIC CO., LTD
20 Years Dedicated To Provide Quality Wire And Cable Solutions

GET SAMPLE

HOME ABOUT US ▼ PRODUCTS ▼ NEWS ▼ APPLICATIONS VIDEO FAQs CONTACT US



HOME-PRODUCTS -UL FLAT CABLE >>



CATEGORIES

- UL Hook-up Wire
- UL Jacketed Cable
- UL Flat Cable
- UL Spiral Cable
- TPU PUR Cable
- VDE Certificated Cable
- Automobile Cable
- Power Cable
- Communication Cable
- CCC Certificated Cable

- PSE Certificated Cable
- Drag Chain Cable
- Can Bus Cable

FEATURED PRODUCTS

- 

UL21031 Fire Resistance Alarm Cable Multicore Cable Jacketed
- 

UL21414 XLPE Jacketed Cable XL-PE Multicore Cable With Shielded Al...
- 

UL21452 Low Voltage Electrical Cable MPPE-PE Multicore Cable
- 

UL20233 TPU Cable Water-proof Medical Coiled Cable with 300V Rated ...



UL2468 FLAT CABLE COLOUR RED-WHITE, BLUE-WHITE

TECHNICAL DATA:

Tinned, annealed, stranded or solid copper conductor. Rated temperature: 80°C or 105°C. Rated voltage: 300Volts. Passes UL VW-1&CUL FT1 or FT2 flame test. For use in internal wiring of appliances, Computers.


 CONTACT NOW  DOWNLOAD TO PDF



PRODUCT DETAIL	PRODUCT TAGS	
UL2468 FLAT RIBBON WIRE		

Construction:

构造:



TECHNICAL DATA


- Tinned, annealed, stranded or solid copper conductor.
- Rated temperature: 80°C or 105°C.
- Rated voltage: 300Volts.
- Passes UL VW-1&CUL FT1 or FT2 flame test.
- For use in internal wiring of appliances, Computers.

UL Style & CSA Type	AWG	Conductor	Insulation Thickness	Overall Dimeter	NO.of core	Pitch	Conductor Resistance at 20°C
		Construction					
		No/mm	mm	NO	mm	mm	Ω/KM
UL2468 (Stranded)	24	7/0.20 or 11/0.16	0.381	1.5*3.00	2	1.50	94.20
	24	7/0.20 or 11/0.16	0.381	1.5*4.50	3	1.50	94.20
	24	7/0.20 or 11/0.16	0.381	1.5*6.00	4	1.50	94.20
	24	7/0.20 or 11/0.16	0.381	1.5*7.50	5	1.50	94.20
	24	7/0.20 or 11/0.16	0.381	1.5*9.00	6	1.50	94.20
	24	7/0.20 or 11/0.16	0.381	1.5*10.50	7	1.50	94.20
	24	7/0.20 or 11/0.16	0.381	1.5*12.00	8	1.50	94.20
	24	7/0.20 or 11/0.16	0.381	1.5*13.50	9	1.50	94.20
	24	7/0.20 or 11/0.16	0.381	1.5*15.00	10	1.50	94.20



24	7/0.20 or 11/0.16	0.381	1.5*16.50	11	1.50	94.20
24	7/0.20 or 11/0.16	0.381	1.5*18.00	12	1.50	94.20
24	7/0.20 or 11/0.16	0.381	1.5*3.50	2	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*5.50	3	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*7.50	4	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*9.50	5	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*11.50	6	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*13.50	7	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*15.50	8	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*17.50	9	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*19.50	10	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*21.50	11	2.00	94.20
24	7/0.20 or 11/0.16	0.381	1.5*23.50	12	2.00	94.20

PACKING DETAILS

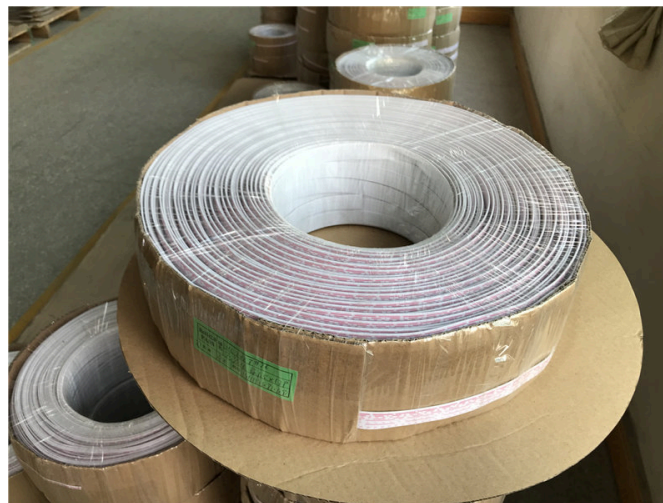

PE film



Polywood Spool

