
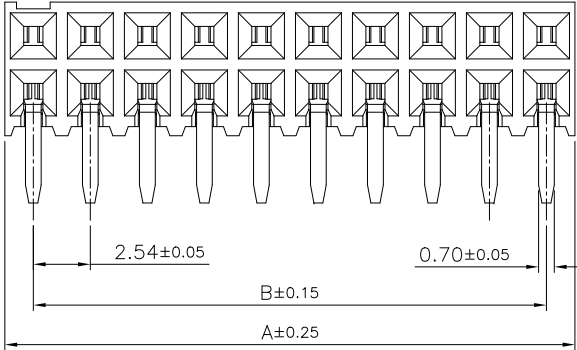
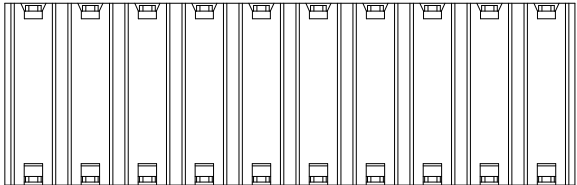
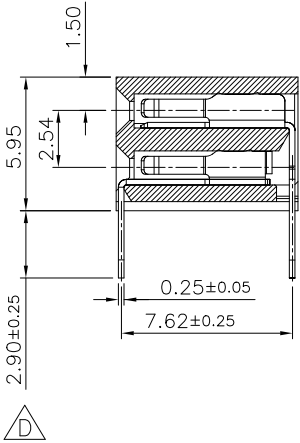


Specifications:
Current rating: 3.0A AC/DC
Voltage rating: 250V AC/DC
Contact resistance: 20m ohm max.
Insulation resistance: 1,000M ohm min.
Withstanding Voltage: 600V AC/minute
Temperature Rating: -40°C ~ +105°C

Materials:
Insulator: High Temp Plastic (UL94V-0)
Contact material: Phosphor Bronze
Plated: Gold/Tin/Selective Gold Plated

How To Order
2214BR-XXX
G:Gold Plated
T:Tin Plated
SG:Selective Gold Plated
SG30:Selective Gold Plated 30u"
No. Of Contacts

Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B
4	5.08	2.54	24	30.48	27.94
6	7.62	5.08	26	33.02	30.48
8	10.16	7.62	28	35.56	33.02
10	12.70	10.16	30	38.10	35.56
12	15.24	12.70	32	40.64	38.10
14	17.78	15.24	34	43.18	40.64
16	20.32	17.78	36	45.72	43.18
18	22.86	20.32	38	48.26	45.72
20	25.40	22.86	40	50.80	48.26
22	27.94	25.40			

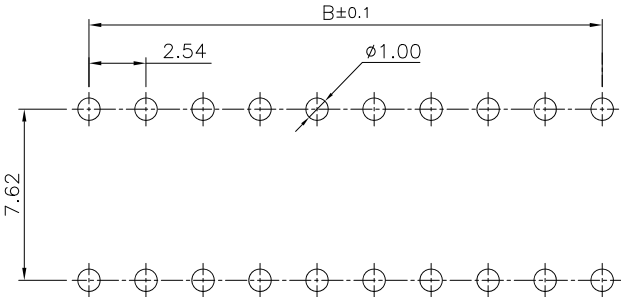

P.C.B Layout
RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	<div><div>Neltron</div><div>Connectors</div><div>Neltron Industrial Co., Ltd.</div></div>	
E				Jack Huang	.X=±0.20 .XX=±0.15		
D	22-AUG-2024		Yizhen Lee	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	24-AUG-2023		Jamie Chuang	Jerry Chen	SCALE: 1:1	2.54mm Pitch PCB Socket Horizontal Entry	<div>A4</div>
B	22-DEC-2021	ADD Plated	MEI		SHEET: 1 / 1	PART NO:	
A	24-May-2018		Jack Huang	APPROVAL:	PROJECTION:	2214BR-XXX	
REV	DATE	FILE	BY	Mike Wu			