
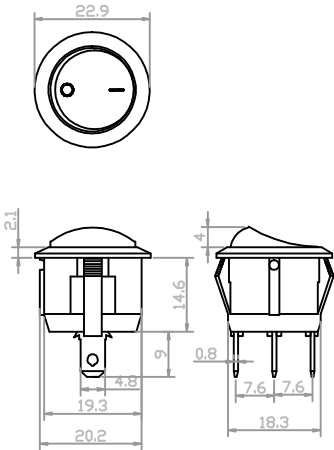


成品确认书



主要技术特性要求:

- 1.使用温度范围: -25~+85℃ (25T85)
- 2.额定工作电压、电流: 6A 250V AC
- 3.绝缘电阻: ≥100MΩ
- 4.接触电阻: ≤0.03Ω
- 5.耐压: AC150V(50Hz)/min
- 6.抗电强度: ≥1500V AC/min
- 7.寿命: 10000次

2.额定工作电压、电流: 6A 250V AC 3.绝缘电阻: ≥100MΩ 4.接触电阻: ≤0.03Ω 5.耐压: AC150V(50Hz)/min 6.漏电强度: ≥1500V AC/min 7.寿命: 10000次				品质部/日期		生产部/日期		审核/日期		5	灯泡	0	普通灯泡				
										4	盖子	1	PA66				
				3	中间连接件	3	黄铜	电镀铜锡									
				2	底座	1	黄铜	电镀铜锡									
								1	底座	1	PA66						
								序号	名称	数量	材 料	处 理	单件 质 量		备 注		
A4				普通公差: COMMON TOLERANCE:													
A3																	
A2				X.XX	±0.10	单位	mm	投影		品名	船型开关	比例	1:1				
A1				X.X	±0.15	绘图		核对		型号	KCD2-102N						
				X	±0.25	日期		核准		图号	KCD1-114						

