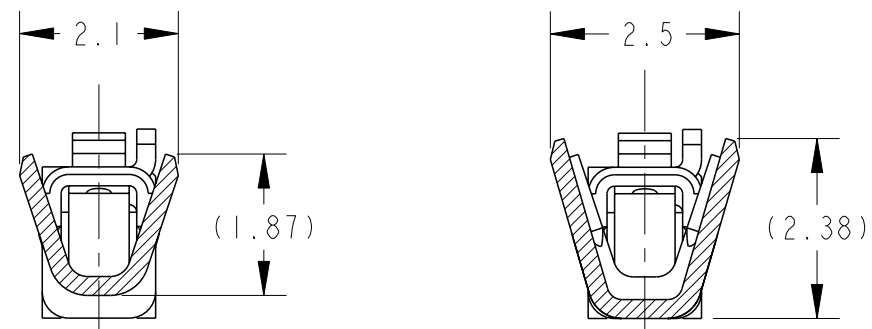


LOC	DIST	REVISONS 変更					
J		P	LTR	DESCRIPTION	DATE	DWN	APVD
			P	REVISED PER ECO-11-005140	02APR2011	RK	HMR
			PI	REVISED ECR-11-007131	14JUN11	RK	HY
			R	REVISED ECR-15-013494	18SEP2015	KK	RK




$$C - C$$

1. 適用電線：
AVSS, AVSSH-f 0.3-0.5mm²
CAVS, CAVUS 0.22-0.5mm²
2. 取付適用規格： 114-5250
3. アプリケータ送りピッチ： 7.5mm
4. パラ端子型番：
PRE-TIN; 1318143-1
SELECTIVE GOLD; 1318143-2

△5 識別用金めっき範囲を示す。
△6 識別用刻印

1. APPLICABLE WIRE RANGE ;
AVSS,AVSSH-f 0.3-0.5mm²
CAVS,CAVUS 0.22-0.5mm²
2. APPLICATION SPEC ; 114-5250
3. APPLICATOR FEED; 7.5mm.
4. P/N OF LOOSE PIECE;
PRE-TIN;1318143-1
SELECTIVE GOLD;1318143-2

5 GOLD PLATED AREA FOR DISCRIMINATION.
6 MARKING FOR IDENTIFICATION.

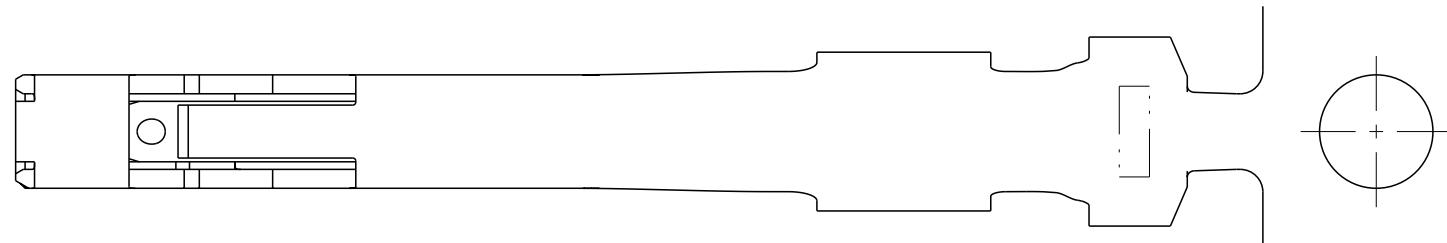
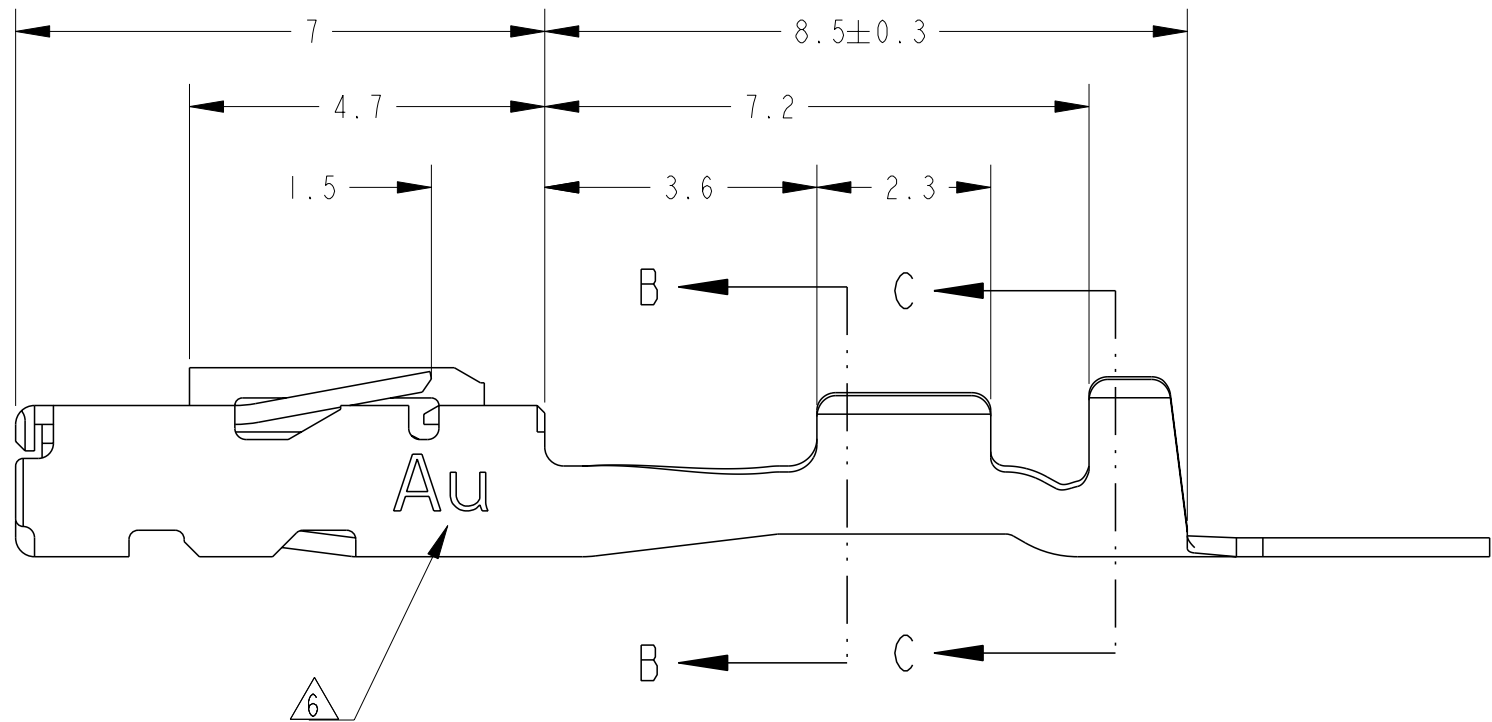


	SEE DRAWING 1123343-7	1123343-7
OBSOLETE	—//—	1123343-5
	 SELECTIVE GOLD	1123343-2
	PRE-TIN	1123343-1
	FINISH	PART NO.

WIRE RANGE 抱合電線斷面積	0.22-0.56mm ²	INSULATION DIA 被覆外径	Ø0.95-1.7
-----------------------	--------------------------	------------------------	-----------

 TE Connectivity	
NAME 名称	025 RECEPTACLE CONTACT 025 RECEPTACLE CONTACT

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A2	00779	C-1123343	-
SCALE 縮尺		0 : 1	SHEET 1 OF 1 REV R

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWNN H. YAMAGAMI	25 JAN 99
DIMENSIONS: 単位: 概 mm		CHK T. KOHNO	25 JAN 99
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 = ± 0.2		APVD N. SAI	25 JAN 99
		PRODUCT SPEC	
		APPLICATION SPEC	
		取付適用規格	
		114-5250	
MATERIAL 材料	ANGLES FINISH 仕上	WEIGHT	0.2g
COPPER ALLOY		SEE TABLE	
		Customer Drawing	