

10/100 BASE-T ETHERNET ISOLATION TRANSFORMER

P/N: TS21C HF DATA SHEET

Feature




- Designed to meet IEEE 802.3u requirement, including 350uH OCL with 8mA bias.
- Comply with ROHS & Halogen Free requirements.
- Operating temperature range: 0 to +70 .
- Storage temperature range: -25 to +85 .

Electrical Specifications @ 25°C								
Part Number	Turns Ratio (±5%)		OCL (uH Min) @ 100KHz/0.1V with 8mA DC Bias	C _{w/w} (pF Max)	L.L (uH Max)	DCR (Ω Max)		HI-POT (Vrms)
	1-3:16-14	6-8:11-9				1-3/6-8	16-14/11-9	
TS21C HF	1CT:1CT	1CT:1CT	350	28	0.5	0.9	1.1	1500

Continue									
Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)			Cross talk (dB Min)		DCMR (dB Min)		
	0.3-100MHz	30MHz	60MHz	80MHz	0.3-60MHz	60-100MHz	30MHz	60MHz	100MHz
TS21C HF	-1.15	-18	-14	-12	-45	-35	-40	-35	-30

Schematic


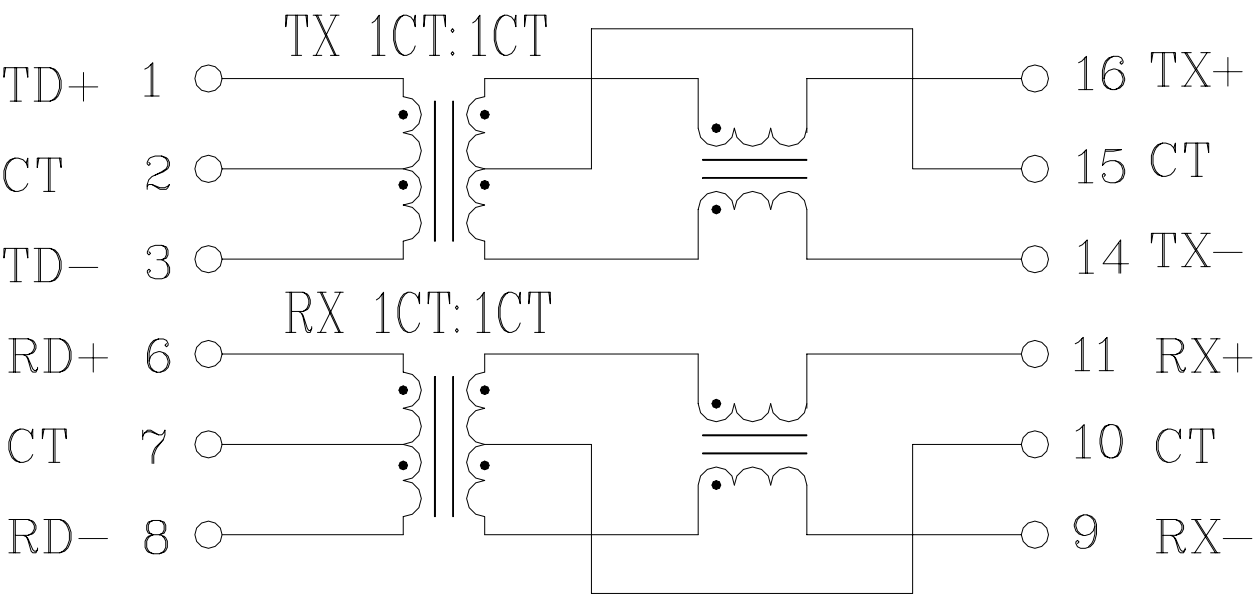


10/100 BASE-T ETHERNET ISOLATION TRANSFORMER



P/N: TS21C HF DATA SHEET

Page : 2/2

Mechanical

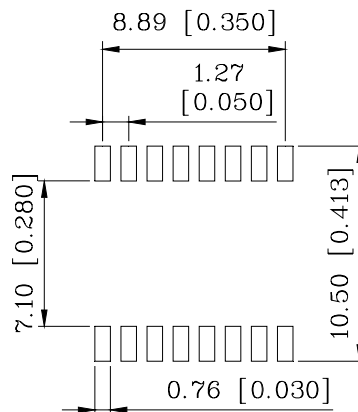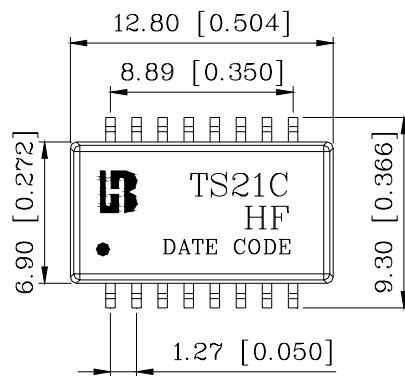

SUGGESTED PAD LAYOUT

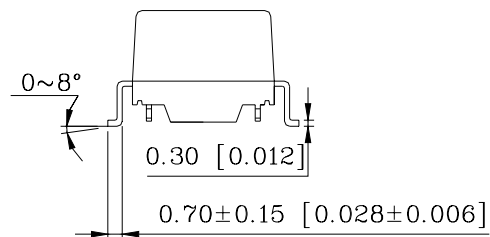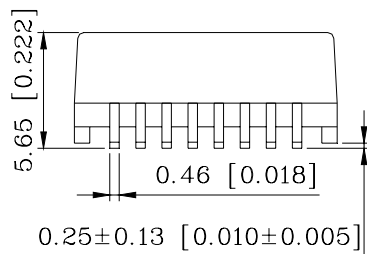

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]

0.xx±0.05[0.002]