


www.vishay.com

TSSP580..

IR Receiver Module for Light Barrier Systems

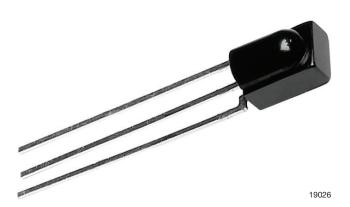

LINKS TO ADDITIONAL RESOURCES



Deckage



DESCRIPTION

The TSSP580.. is a compact infrared detector module for presence sensing applications. It receives 38 kHz modulated signals and has a peak sensitivity of 940 nm.

This component has not been qualified according to automotive specifications.

FEATURES

 Presence sensor: up to 2 m distance, find more info at: <u>www.vishay.com/doc?49009</u>



<u>e</u>:-

RoHS

- Light barrier: up to 8 m distance, TSAL6200 with $\rm I_F$ = 50 mA,

find more info at: <u>www.vishay.com/doc?49650</u>

- Fast proximity: up to 2 m range at 5 ms response time, find more info at: www.vishav.com/doc?82741
- Supply voltage: 2.0 V to 5.5 V
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

APPLICATIONS


- Reflective sensors for hand dryers, towel or soap dispensers, water faucets, toilet flush
- Vending machine fall detection
- · Security and pet gates
- · Person or object vicinity switch
- Fast proximity sensors for toys, robotics, drones, and other consumer and industrial uses

DESIGN SUPPORT TOOLS

- <u>3D models</u>
- <u>Window size calculator</u>

BLOCK DIAGRAM





Rev. 2.1, 09-Aug-2023

Document Number: 82479

1

COMPLIANT HALOGEN FREE <u>GREEN</u> (5-2008)





TSSP580..

Vishay Semiconductors

MECHANICAL DATA







IR emitter Envelope signal 38 kHz +3 V +3 V H Gut to L B detector

PRESENCE SENSING

ORDERING CODE

TSSP580.. - 1500 pieces in bags

PARTS TABLE							
Carrier frequency	38 kHz	TSSP58038					
	56 kHz	TSSP58056					
Package		Minicast					
Pinning		1 = OUT, 2 = GND, 3 = V _S					
Dimensions (mm)		5.0 W x 6.95 H x 4.8 D					
Mounting		Leaded					
Application		Presence sensors, fast proximity sensors					

ABSOLUTE MAXIMUM RATINGS									
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT					
Supply voltage		V _S	-0.3 to +6	V					
Supply current		IS	5	mA					
Output voltage		Vo	-0.3 to (V _S + 0.3)	V					
Output current		Ι _Ο	5	mA					
Junction temperature		Tj	100	°C					
Storage temperature range		T _{stg}	-25 to +85	°C					
Operating temperature range		T _{amb}	-25 to +85	°C					
Power consumption	T _{amb} ≤ 85 °C	P _{tot}	10	mW					

Note

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only
and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification
is not implied. Exposure to absolute maximum rating conditions for extended periods may affect the device reliability.




www.vishay.com


Vishay Semiconductors


TSSP580..


ELECTRICAL AND OPTICAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)									
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT			
Supply current (pin 3)	$E_v = 0, V_S = 3.3 V$	I _{SD}	0.25	0.35	0.45	mA			
Supply current (pirt 3)	E _v = 40 klx, sunlight	I _{SH}	-	0.45	-	mA			
Supply voltage		Vs	2.0	-	5.5	V			
Transmission distance	$\label{eq:Ev} \begin{array}{l} E_v = 0, test \; signal \; see \; Fig. \; 1, \\ IR \; diode \; TSAL6200, \\ I_F = 50 \; mA \end{array}$	d	-	8	-	m			
Output voltage low (pin 1)	$I_{OSL} = 0.5 \text{ mA}, E_e = 2 \text{ mW/m}^2,$ test signal see Fig. 1	V _{OSL}	-	-	100	mV			
Minimum irradiance	$\begin{array}{c} \mbox{Pulse width tolerance:} \\ t_{pi} - 4/f_o < t_{po} < t_{pi} + 4/f_o, \\ \mbox{test signal see Fig. 1} \end{array}$	E _{e min.}	-	0.7	1.2	mW/m ²			
Maximum irradiance	t_{pi} - 4/f _o < t_{po} < t_{pi} + 4/f _o , test signal see Fig. 1	E _{e max.}	30	-	-	W/m ²			
Directivity	Angle of half transmission distance	Φ1/2	-	± 45	-	deg			

TYPICAL CHARACTERISTICS (T_{amb} = 25 °C, unless otherwise specified)












Fig. 4 - Output Pulse Diagram




Fig. 2 - Pulse Length and Sensitivity in Dark Ambient

Rev. 2.1, 09-Aug-2023

3

Document Number: 82479

Datasheet Values Refer to PCN-OPT-1289-2023



www.vishay.com



Vishay Semiconductors




Fig. 5 - Frequency Dependence of Responsivity




Fig. 6 - Sensitivity vs. Ambient Temperature




Fig. 7 - Relative Spectral Sensitivity vs. Wavelength




Fig. 8 - Horizontal Directivity





Fig. 9 - Vertical Directivity



Rev. 2.1, 09-Aug-2023

Document Number: 82479

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Datasheet Values Refer to PCN-OPT-1289-2023




www.vishay.com

The typical application of this device is a reflective or beam break sensor with active low "detect" or "no detect" information contained in its output. Applications requiring up to 2 m beam break or 1 m reflective range benefit from the lower gain of these sensors because they are less sensitive to stray signal from the emitter, simplifying the mechanical design.


Vishay Semiconductors

TSSP580..

Example for a sensor hardware:



There should be no common window in front of the emitter and detector in order to avoid crosstalk via guided light through the window.

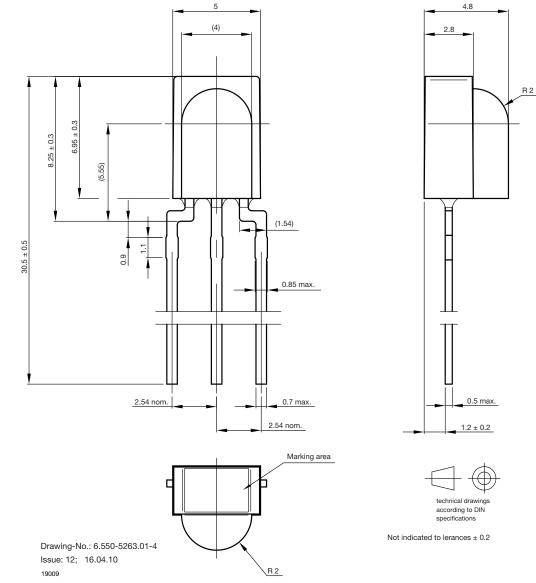

PACKAGE DIMENSIONS in millimeters

Rev. 2.1, 09-Aug-2023

5



Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.