


**DIP6-pin type with
low on-resistance and
reinforced insulation**

PhotoMOS®

**HE 1 Form A
(AQV25O, AQV25OH)**

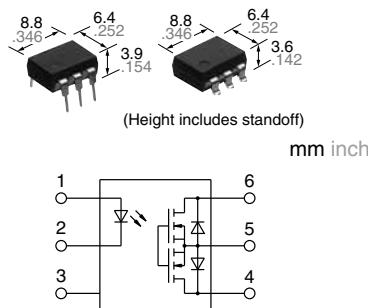

FEATURES

1. Wide variation of 40V, 60V, 100V, 200V, 250V, 400V, 600V, 1,000V and 1,500V load voltage
2. Low on-resistance of Typ. 0.6Ω (AQV251)
3. Reinforced insulation type of 5,000Vrms I/O isolation available

TYPICAL APPLICATIONS

- Measuring instruments
- Data communication equipment
- Telephone equipment
- Automatic meter reading device

RoHS compliant

TYPES

I/O isolation	Output rating*		Package	Part No.			Packing quantity
				Through hole terminal	Surface-mount terminal		
	Load voltage	Load current		Tube packing style	Tape and reel packing style	Tube	Tape and reel
AC/DC dual use	1,500Vrms	40 V	500 mA	AQV251	AQV251A	AQV251AX	AQV251AZ
		60 V	400 mA	AQV252	AQV252A	AQV252AX	AQV252AZ
		100 V	350 mA	AQV255	AQV255A	AQV255AX	AQV255AZ
		200 V	250 mA	AQV257	AQV257A	AQV257AX	AQV257AZ
		250 V	200 mA	AQV253	AQV253A	AQV253AX	AQV253AZ
		400 V	150 mA	AQV254	AQV254A	AQV254AX	AQV254AZ
		1,000 V	30 mA	AQV259	AQV259A	AQV259AX	AQV259AZ
		1,500 V	20 mA	AQV258	AQV258A	AQV258AX	AQV258AZ
	Reinforced 5,000Vrms	250 V	200 mA	AQV253H	AQV253HA	AQV253HAX	AQV253HAZ
		400 V	150 mA	AQV254H	AQV254HA	AQV254HAX	AQV254HAZ
		600 V	130 mA	AQV256H	AQV256HA	AQV256HAX	AQV256HAZ

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

1 tube contains:
50 pcs.
1 batch contains:
500 pcs.

1,000 pcs.

RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV251(A)	AQV252(A)	AQV255(A)	AQV257(A)	AQV253(A)	AQV254(A)	AQV259(A)	AQV258(A)	AQV253H(A)	AQV254H(A)	AQV256H(A)	Remarks
Input	LED forward current	I _F		50 mA											
	LED reverse voltage	V _R		5 V											
	Peak forward current	I _{FP}		1 A											f = 100 Hz, Duty factor +0.1%
	Power dissipation	P _{in}		75 mW											
Output	Load voltage (peak AC)	V _L	A	40V	60V	100V	200V	250V	400V	1,000V	1,500V	250V	400V	600V	
	Continuous load current	I _L		0.5A	0.4A	0.35A	0.25A	0.2A	0.15A	0.03A	0.02A	0.2A	0.15A	0.13A	A connection: Peak AC, DC B, C connection: DC
				0.7A	0.6A	0.45A	0.35A	0.3A	0.18A	0.04A	0.025A	0.3A	0.18A	0.14A	
	Peak load current	I _{peak}	C	1.0A	0.8A	0.70A	0.5A	0.4A	0.25A	0.05A	0.04A	0.4A	0.25A	0.16A	A connection: 100 ms (1 shot) V _L = DC
	Power dissipation	P _{out}		360 mW											
	Total power dissipation	P _T		410 mW											
I/O isolation voltage	V _{iso}		1,500 Vrms											5,000 Vrms	
	Ambient temperature	Operating	T _{opr}	−40 to +85°C −40 to +185°F											(Non-icing at low temperatures)
	Storage	T _{stg}		−40 to +100°C −40 to +212°F											

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV251(A)	AQV252(A)	AQV255(A)	AQV257(A)	AQV253(A)	AQV254(A)	AQV259(A)	AQV258(A)	AQV253H(A)	AQV254H(A)	AQV256H(A)	Condition	
Input	LED operate current	Typical	I _{Fon}	0.9 mA											I _L = Max.	
		Maximum		3 mA												
	LED turn off current	Minimum	I _{Foff}	0.4 mA											I _L = Max.	
		Typical		0.8 mA												
Output	LED dropout voltage	Typical	V _F	1.25 V (1.14 V at I _F = 5 mA)											I _F = 5 mA	
		Maximum		1.5 V												
	On resistance	Typical	R _{on}	A	0.6 Ω	0.74 Ω	1.8 Ω	2.6 Ω	5.5 Ω	12.4 Ω	85 Ω	345 Ω	5.5 Ω	12.4 Ω	20 Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum			1 Ω	1.4 Ω	2.5 Ω	4 Ω	8 Ω	16 Ω	200 Ω	500 Ω	8 Ω	16 Ω	30 Ω	I _F = 5 mA I _L = Max. Within 1 s
		Typical	R _{on}	B	0.3Ω	0.37Ω	0.9Ω	1.4Ω	2.7Ω	6.2Ω	60Ω	345Ω	2.7Ω	6.2Ω	15Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum			0.5Ω	0.7Ω	1.25Ω	2Ω	4Ω	8Ω	100Ω	500Ω	4Ω	8Ω	20Ω	I _F = 5 mA I _L = Max. Within 1 s
		Typical	R _{on}	C	0.15Ω	0.18Ω	0.45Ω	0.7Ω	1.4Ω	3.1Ω	30Ω	160Ω	1.4Ω	3.1Ω	7.5Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum			0.25Ω	0.35Ω	0.63Ω	1Ω	2Ω	4Ω	50Ω	250Ω	2Ω	4Ω	10Ω	I _F = 5 mA I _L = Max. Within 1 s
Transfer characteristics	Off state leakage current	Maximum	I _{Leak}	—	1 μA						10 μA			1 μA		I _F = 0 mA V _L = Max.
	Turn on time*	Typical	T _{on}	—	1.7 ms	1.4 ms	0.9 ms	1.5 ms	0.8 ms	0.6 ms	0.35 ms	2.4 ms	1.8 ms	1.2 ms	I _F = 5 mA I _L = Max.	
		Maximum		—	3 ms	2 ms	3 ms	2 ms	1 ms	4 ms	3 ms					I _F = 5 mA I _L = Max.
	Turn off time*	Typical	T _{off}	—	0.07 ms	0.09 ms	0.1 ms	0.06 ms	0.05 ms	0.04 ms	0.06 ms	0.05 ms	0.06 ms			f = 1 MHz V _B = 0 V
		Maximum		—	0.2 ms											
	I/O capacitance	Typical	C _{iso}	—	1.3 pF											
	Initial I/O isolation resistance	Minimum	R _{iso}	—	3 pF											500 V DC

*Turn on/Turn off time

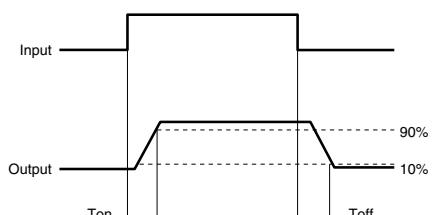

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Min.	Max.	Unit
LED current	I _F	5	30	mA
AQV251(A)	Load voltage (Peak AC)	V _L	—	32
	Continuous load current (A connection)	I _L	—	0.5
AQV252(A)	Load voltage (Peak AC)	V _L	—	48
	Continuous load current (A connection)	I _L	—	0.4
AQV255(A)	Load voltage (Peak AC)	V _L	—	80
	Continuous load current (A connection)	I _L	—	0.35
AQV257(A)	Load voltage (Peak AC)	V _L	—	160
	Continuous load current (A connection)	I _L	—	0.25
AQV253(A)	Load voltage (Peak AC)	V _L	—	200
	Continuous load current (A connection)	I _L	—	0.2
AQV254(A)	Load voltage (Peak AC)	V _L	—	320
	Continuous load current (A connection)	I _L	—	0.15
AQV259(A)	Load voltage (Peak AC)	V _L	—	800
	Continuous load current (A connection)	I _L	—	0.03
AQV258(A)	Load voltage (Peak AC)	V _L	—	1200
	Continuous load current (A connection)	I _L	—	0.02
AQV253H(A)	Load voltage (Peak AC)	V _L	—	200
	Continuous load current (A connection)	I _L	—	0.2
AQV254H(A)	Load voltage (Peak AC)	V _L	—	320
	Continuous load current (A connection)	I _L	—	0.15
AQV256H(A)	Load voltage (Peak AC)	V _L	—	480
	Continuous load current (A connection)	I _L	—	0.13

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

■ Continual DC bias (for AQV258, AQV259**)**


In cases in which a continual DC bias is applied between the input and output, the output-side MOS-FET may deteriorate due to the voltage. Therefore, please verify operation of the actual design before using. An example of a circuit that might undergo MOS-FET deterioration due to voltage is given below.

REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F ;

Type of connection: A

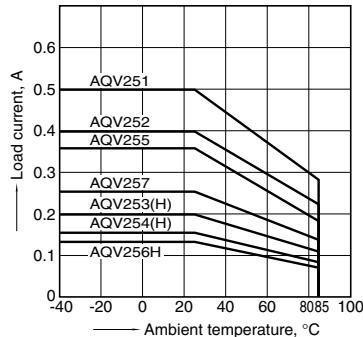


2.-(2) On resistance vs. ambient temperature characteristics

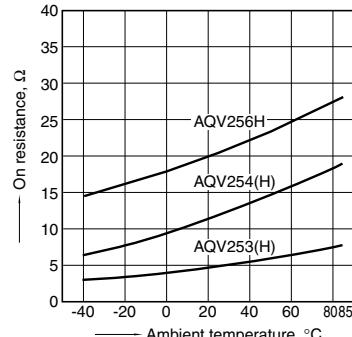Measured portion: between terminals 4 and 6;
LED current: 5 mA;
Continuous load current: Max. (DC)


1.-(2) Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F ;


Type of connection: A

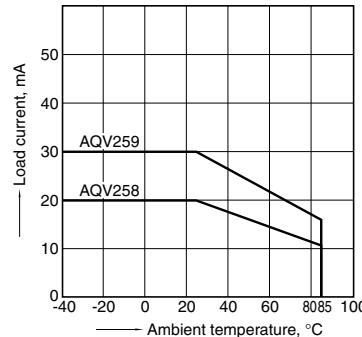


2.-(1) On resistance vs. ambient temperature characteristics

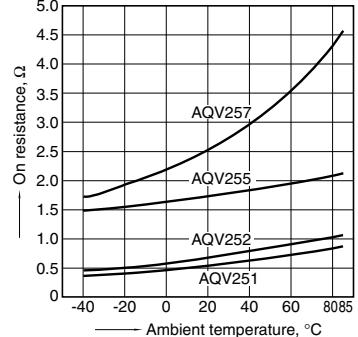Measured portion: between terminals 4 and 6;
LED current: 5 mA;
Continuous load current: Max. (DC)

2.-(3) On resistance vs. ambient temperature characteristics

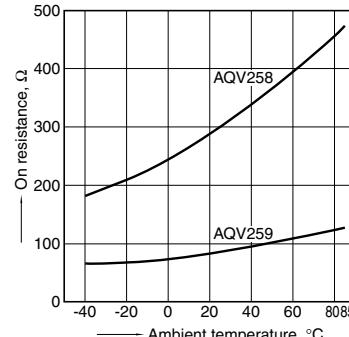Measured portion: between terminals 4 and 6;
LED current: 5 mA;
Continuous load current: 30 mA (DC)


3.-(1) Turn on time vs. ambient temperature characteristics

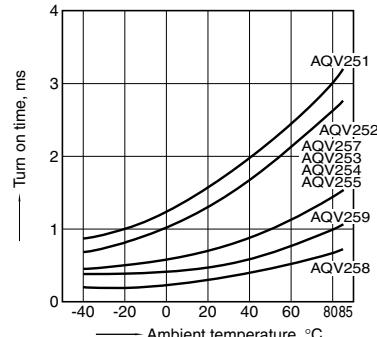LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

HE 1 Form A (AQV25O, AQV25OH)


3.- (2) Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

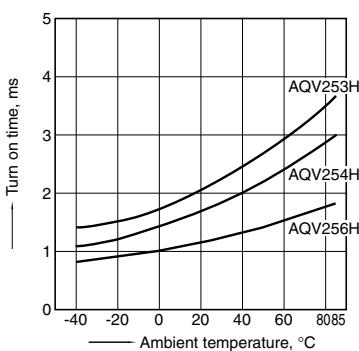


4.- (1) Turn off time vs. ambient temperature characteristics

Sample: AQV251, AQV252, AQV253, AQV254, AQV255, AQV257, AQV258, AQV259; Load voltage: Max. (DC); Continuous load current: Max. (DC)

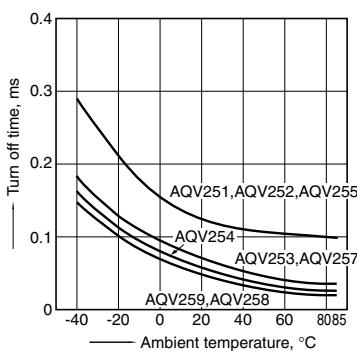


4.- (2) Turn off time vs. ambient temperature characteristics

Sample: AQV253H, AQV254H, AQV256H; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

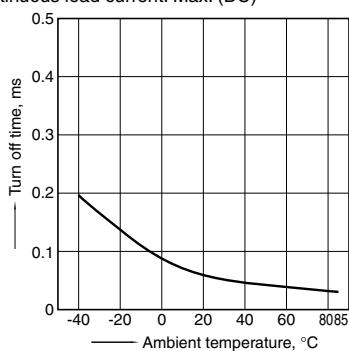


5.- (1) LED operate current vs. ambient temperature characteristics

Sample: AQV251, AQV252, AQV253, AQV254, AQV255, AQV257, AQV258, AQV259; Load voltage: Max. (DC); Continuous load current: Max. (DC)

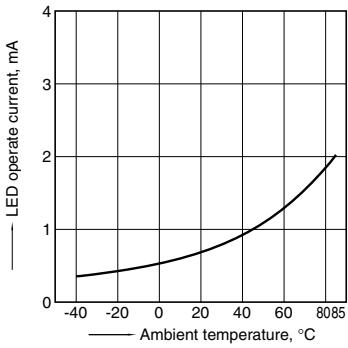

5.- (2) LED turn off current vs. ambient temperature characteristics

Sample: AQV253H, AQV254H, AQV256H; Load voltage: Max. (DC); Continuous load current: Max. (DC)

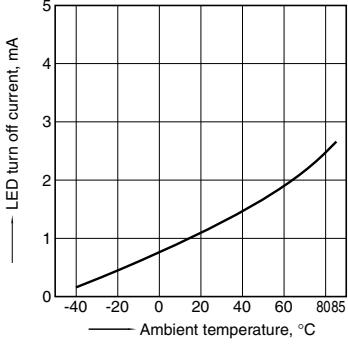


6.- (1) LED turn off current vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F


5.- (2) LED operate current vs. ambient temperature characteristics

Sample: AQV251, AQV252, AQV253, AQV254, AQV255, AQV257, AQV258, AQV259; Load voltage: Max. (DC); Continuous load current: Max. (DC)

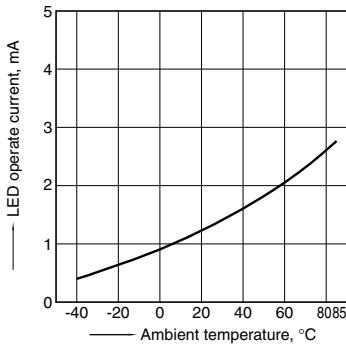


6.- (2) LED turn off current vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

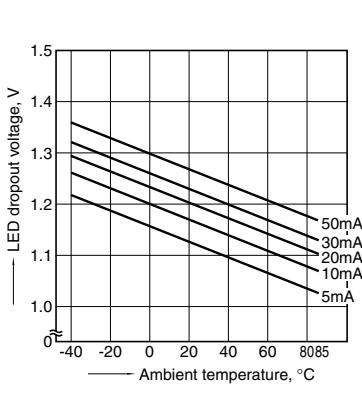

8.- (1) Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

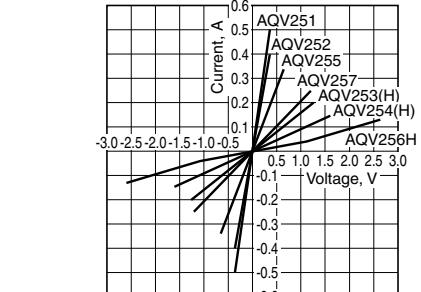


8.- (2) Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F


9.- (1) Off state leakage current vs. load voltage characteristics

Sample: AQV259; Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

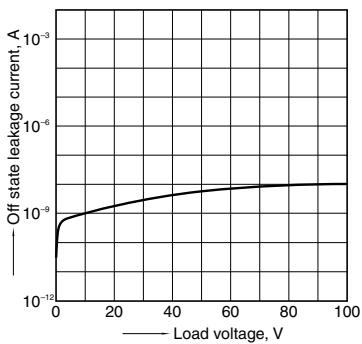


9.- (2) Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

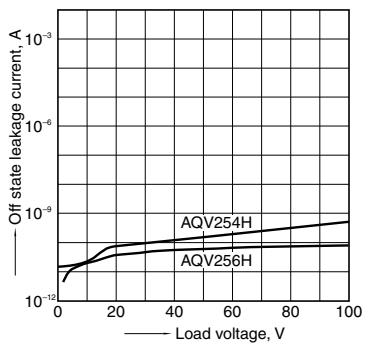


10-(1). Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

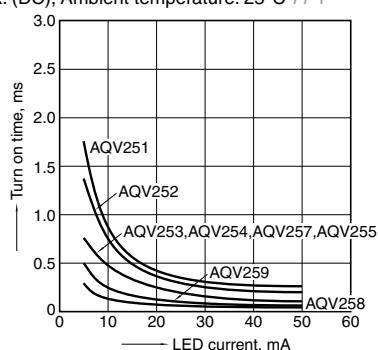


10-(2). Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

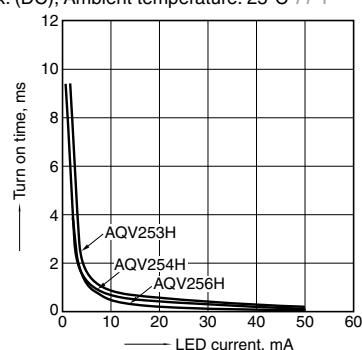


11-(1). Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

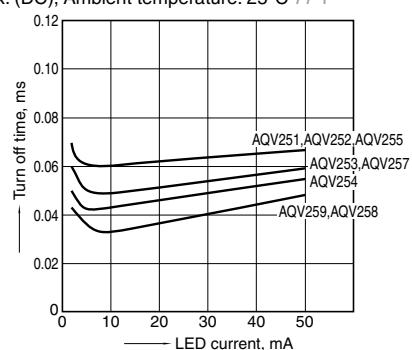


11-(2). Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

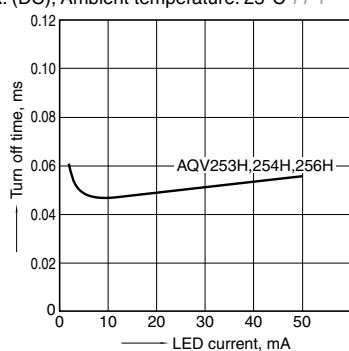


12.- (1) Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

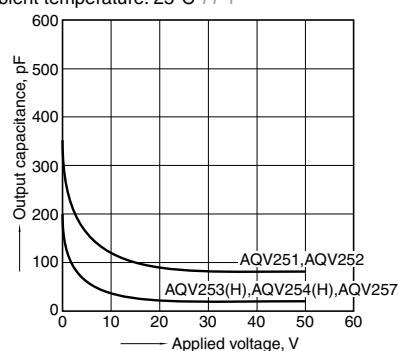

12.- (2) Output capacitance vs. applied voltage characteristics

Sample: AQV259;
Measured portion: between terminals 4 and 6;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

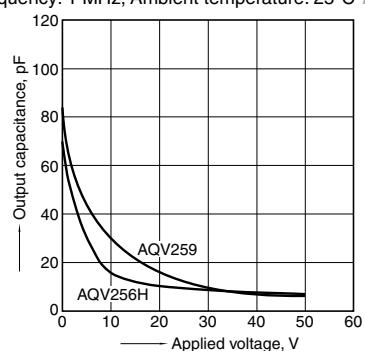

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQV251A](#) [AQV252](#) [AQV251AX](#) [AQV252A](#) [AQV253](#) [AQV254A](#) [AQV254H](#) [AQV254HAZ](#) [AQV257](#) [AQV257A](#)
[AQV257AX](#) [AQV258A](#) [AQV258AZ](#) [AQV258HAX](#) [AQV259A](#) [AQV251AZ](#) [AQV252AX](#) [AQV253A](#) [AQV253AX](#)
[AQV253AZ](#) [AQV253HA](#) [AQV253HAX](#) [AQV253HAZ](#) [AQV254AX](#) [AQV254AZ](#) [AQV254HA](#) [AQV254HAX](#) [AQV255](#)
[AQV255A](#) [AQV255AX](#) [AQV255AZ](#) [AQV257AZ](#) [AQV258AX](#) [AQV259AX](#) [AQV259AZ](#) [AQV258HAXC38](#) [AQV259](#)
[AQV259HA](#) [AQV253H](#) [AQV251](#) [AQV258](#) [AQV254](#) [AQV252AZ](#) [AQV252H](#) [AQV252HA](#) [AQV252HAX](#) [AQV254S](#)
[AQV254SX](#) [AQV254SZ](#) [AQV257H](#) [AQV257HA](#) [AQV257HAX](#) [AQV257HAZ](#) [AQV258HAZ](#) [AQV259H](#) [AQV256HAX](#)
[AQV256HA](#) [AQV256HAZ](#) [AQV258HA](#) [AQV252HAZ](#) [AQV256H](#)