

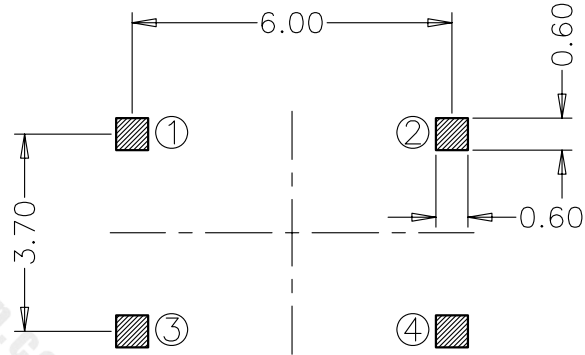


REV	ECN NO.	APPD
A	HC-16-0124	ZO

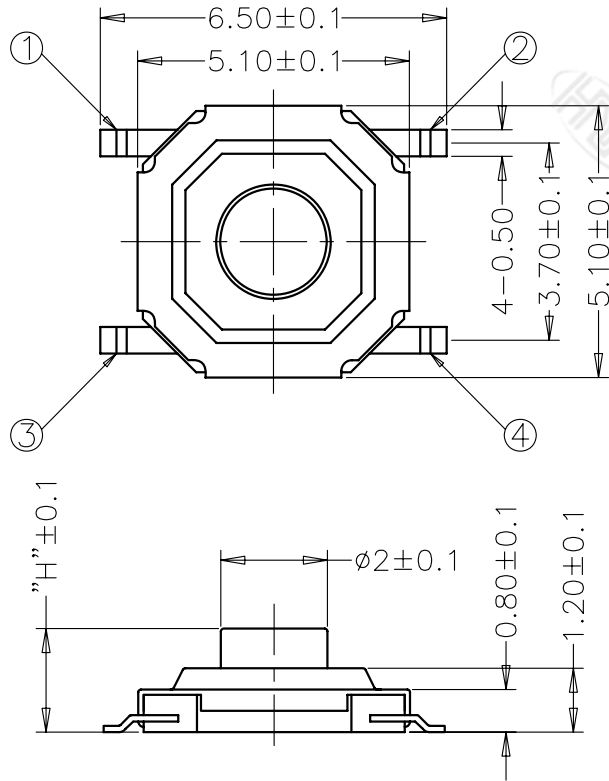


安装尺寸图

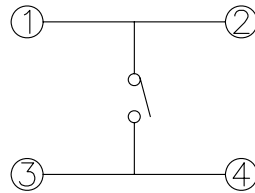

回路图

规格 Specifications	
额定负荷 Rating	DC 12V/20mA
接触电阻Contact Resistance	100mΩ max
绝缘电阻Insulation resistance	DC100V 60S 100MΩ min
抗电强度Dielectric strength	AC250V(50~60HZ) 60S
操作力Operation force	160±30gf 250±50gf
寿命试验Operating Life	1,00,000 cycles 100,000 cycles
行程Travels	0.20±0.1mm

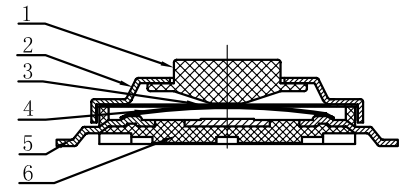

PRODUCT NO. : G***-****-**** - CT

轻触开关

4x4系列

外形:

按钮颜色:

底座颜色:

盖板颜色:

初始颜色, 则不启用

操作力度:

130=130gf

160=160gf

180=180gf

250=250gf

手感:

0=常规(弹片)

1=大手感(弹片)

2=小手感(弹片)

3=特殊手感(弹片)

材料:

0=初始材料

1=新增材料

依次增加

产品高度(H):

150=1.50mm

160=1.60mm

170=1.70mm

编带

非编带, 不启用


6	HOUSING	1	LCP	BLACK
5	TERMINAL	4	BRASS	Ag-plating
4	DOME	1	SUS	Ag-plating
3	PE-FILE	1	0.05	YELLOW
2	COVER	1	SUS	PRIMARY
1	ACTUATOR	1	BRASS	YELLOW

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
X. ± 0.2	X.* ± 3'	UNITS	MM	
.X ± 0.1	.X* ± 2'	MAT'L		
.XX ± 0.05	.XX* ± 1'			
.XXX ± 0.03	.XXX* ± 0.5'	FINISH		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.				
Q'TY		APPD:	2016	
		CHKD:		
		DR:		

HON YUAN
HON YUAN PRECISION IND. CO.,LTD.
SHENZHEN, CHINA.

TITLE:

DWG NO.:



SCALE SHEET REV.